



## Testing, Measuring and Safety Instruments





## Top-class test equipment *DUSPOL® voltage testers – the testers with the VDE mark of conformity*

### The international standard for voltage testers IEC/EN 61243-3 (DIN VDE 0682-401) increases safety for work under voltage.

Your work as an expert requires safe testing. Therefore, you should not make any compromises concerning safety! Voltage testers which are used on electrical systems of up to 1000 V have to comply with the standard IEC/EN 61243-3 (DIN VDE 0682-401). The standard creates uniform testing and safety criteria on an international level and remarkably which concentrates on user safety.

An essential safety aspect of the standard is that voltage testers must allow a direct indication of the voltage status "presence of voltage" or "absence of voltage" without actuation of any push-buttons or switches in DC and AC mains.

Voltage testers with load connection (operating current > AC 3.5 mA/DC 10 mA) must be equipped with a push-button for activation of the load circuit at each test handle.



All *DUSPOL®* voltage testers are equipped with a direct display system without loading the test point. In case of need, a load circuit can be connected via a push-button which suppresses inductive and capacitive reactive voltages. Thus, it is possible to clearly distinguish between high-energy and low-energy electric circuits.

A vibrating motor can be activated additionally. The vibrating power of this motor increases proportionally to the applied voltage. This is an additional indication of voltage being applied.

The *DUSPOL®* voltage testers underlines once again the BENNING expertise in the field of testing, measuring and safety technology. With a *DUSPOL®* voltage tester you acquire an innovative product which has been tested and approved by the independent VDE Test and Certification Institute.

### The test equipment *DUSPOL®* voltage testers

Product safety on the highest level:

- direct displaying without pressing a push-button (high-impedance test)
- load connection via push-buttons (low-impedance test)
- continuity check via buzzer and LED or LCD respectively
- vibrating alert in the test handle
- measuring point illumination



# Top-class test equipment

## DUSPOL® digital LC, for highest precision

### Top-class test equipment


#### DUSPOL® voltage testers

- tested and approved according to the international standard IEC/EN 61243-3 (DIN VDE 0682-401)
- high-impedance voltage test without actuating a push-button
- connectable load circuit, no measuring errors due to irritating capacitive and inductive voltages by means of intended load connection via push buttons
- intended release of a 30 mA RCD safety switch
- acoustic continuity check via buzzer and LED/LCD
- phase-sequence indication with arrows “↻”
- safe single-pole phase test
- precise illumination of the measuring point
- shock-resistant, dust-proof and splash-proof housing (protection class IP 64)
- automatically background lighting via light sensor
- safe voltage testing for voltages of up to 1000 V AC/DC (DUSPOL® 1000)



#### Voltage and Continuity Tester

	DUSPOL® digital LC	DUSPOL® analog plus	DUSPOL® expert	DUSPOL® 1000	DUSPOL® combi	DUSPOL® compact	PROFIPOL®
indication	LED/LCD	plunger system/LED	LED/LCD	LED/LCD	LED/LCD	LED	LED
indication steps	6 – 750 V	12 – 690 V	12 – 690 V	12 – 1000 V	12 – 690 V	12 – 690 V	6 – 400 V
continuity test	buzzer + LCD 200 kΩ	–	buzzer + LED 108 kΩ	–	LCD 600 kΩ	–	–
phase-sequence test	yes/LCD	yes/LCD	yes/LCD	yes/LCD	–	–	–
single-pole phase test	yes/LCD	yes/LCD	yes/LCD	yes/LCD	yes/LCD	–	–
polarity test	yes/LCD	yes/LED	yes/LED	yes/LED	yes/LED	yes/LED	yes/LED
load connection via push buttons	I <sub>s</sub> = 200 mA (750 V <sub>DC</sub> )	I <sub>s</sub> = 250 mA (750 V <sub>DC</sub> )	I <sub>s</sub> = 200 mA (750 V <sub>DC</sub> )	I <sub>s</sub> = 370 mA (1000 V <sub>DC</sub> )	I <sub>s</sub> = 200 mA (750 V <sub>DC</sub> )	I <sub>s</sub> = 200 mA (750 V <sub>DC</sub> )	–
30 mA RCD triggering via push button	yes	yes	yes	yes	yes	yes	–
vibrating alarm	yes	yes	yes	yes	yes	–	–
measuring point illumination	yes/LED	–	yes/LED	–	–	–	–
protection class	IP 64	IP 64	IP 64	IP 64	IP 64	IP 64	IP 65
item no.	050258	050257	050253	050260	050254	050251	020022

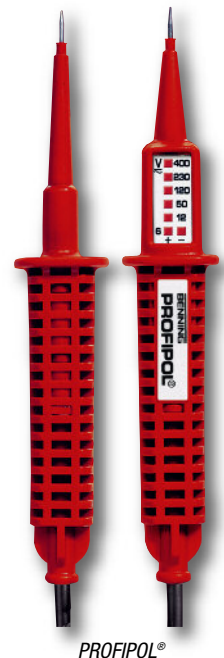

PROFIPOL®



## Digital Multimeter BENNING MM P3, MM 1-1 – MM 1-3, MM 1 – MM 4 reliable and precise in each and every situation

### BENNING MM P3

#### Pocket-Size Digital Multimeter

- top-class functionality and design
- even smaller and narrower with lower weight (only 130 g)
- minimum dimensions: 132 x 86 x 19 mm
- for all-purpose use with leather case and measuring leads




MM P3



### BENNING MM 1-1, MM 1-2 and MM 1-3

#### Digital Multimeters with Volt Sensor Function

- the integrated Volt sensor signals phase voltages by means of an acoustic signal and a red LED signal
- it localizes cable breaks and defective lamps in exposed cables (cable reel, light chains) via the feeding side of the phase

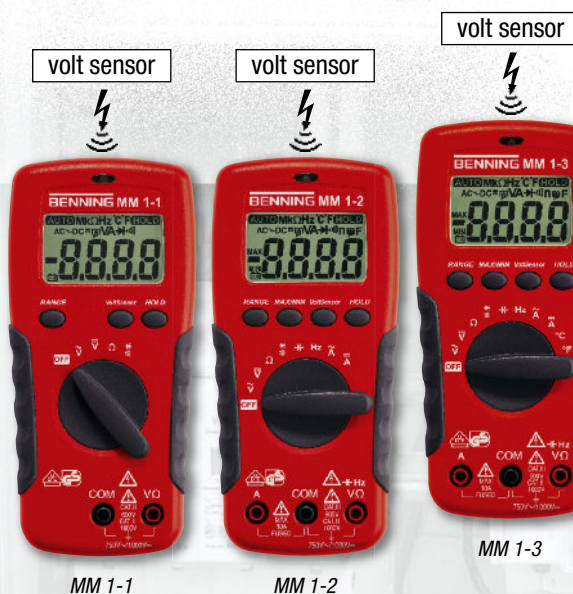

MM 1-1

MM 1-2

MM 1-3



MM 1



MM 2



MM 3

tested and  
approved



IEC/EN 61010-1  
(DIN VDE 0411-1)

### BENNING MM 1, MM 2, MM 3 and MM 4

#### Digital Multimeter

#### Technology that inspires, Quality that convinces

Million fold proven as well as tested and approved by the independent VDE Test and Certification Institute according to current international standards.

- basic measuring for current, voltage, resistance, continuity, diode, capacity and frequency
- automatic and/or manual measuring range selection
- safe current measuring up to 300 A AC via attachable current clamp adapter (MM 4)

#### Digital Multimeter

	BENNING MM P3	BENNING MM 1-1	BENNING MM 1-2	BENNING MM 1-3	BENNING MM 1	BENNING MM 2	BENNING MM 3
indicating range	5000	2000	2000	2000	3200	2000	2000
basic accuracy	0.6 %	0.5 %	0.5 %	0.5 %	0.5 %	0.5 %	0.5 %
AC voltage	0.1 mV – 600 V	0.1 mV – 750 V	0.1 mV – 750 V	0.1 mV – 750 V	1 mV – 600 V	0.1 mV – 750 V	0.1 mV – 600 V
DC voltage	0.1 mV – 600 V	0.1 mV – 1000 V	0.1 mV – 1000 V	0.1 mV – 1000 V	0.1 mV – 600 V	0.1 mV – 1000 V	0.1 mV – 600 V
AC current	–	–	1 mA – 10 A	1 mA – 10 A	–	0.1 µA – 20 A	0.1 µA – 20 A
DC current	–	–	1 mA – 10 A	1 mA – 10 A	0.1 µA – 3.2 mA	0.1 µA – 20 A	0.1 µA – 20 A
resistance	0.1 Ω – 40 MΩ	0.1 Ω – 20 MΩ	0.1 Ω – 20 MΩ	0.1 Ω – 20 MΩ	0.1 Ω – 32 MΩ	0.1 Ω – 20 MΩ	0.1 Ω – 20 MΩ
continuity/diode	yes/yes	yes/yes	yes/yes	yes/yes	yes/yes	yes/yes	yes/yes
frequency	1 mHz – 5 MHz	–	1 Hz – 20 MHz	1 Hz – 20 MHz	–	–	1 Hz – 200 kHz
capacity	10 pF – 100 µF	–	1 pF – 2 mF	1 pF – 2 mF	–	–	1 pF – 200 µF
temperature	–	–	–	–20 °C up to +800 °C	–	–	–
volt sensor	–	yes	yes	yes	–	–	–
interface	–	–	–	–	–	–	–
software	–	–	–	–	–	–	–
memory	HOLD	HOLD	HOLD, MAX/MIN	HOLD, MAX/MIN	HOLD	–	–
Data Log function	–	–	–	–	–	–	–
measuring method	RMS	RMS	RMS	RMS	RMS	RMS	RMS
measuring category	CAT III 300 V	CAT III 600 V	CAT III 600 V	CAT III 600 V	CAT III 600 V	CAT III 600 V	CAT III 300 V
item no.	044084	044081	044082	044083	044027	044028	044029



MM 4



# Digital Multimeter BENNING 7-1 – MM 11

## safety and functional diversity without any compromises

### BENNING MM 7-1

#### Digital Multimeter offering highest safety for industrial applications

- TRUE RMS measuring method for precise measuring results even for non-sinusoidal signal characteristics
- highest measuring category CAT IV 600 V for highest safety
- AutoV function for automatic AC/DC voltage detection and low input impedance (LoZ) to suppress capacitively/inductively induced voltages
- integrated Volt sensor for non-contact signalling of phase voltages and cable breaks in lines
- LC display with bargraph indication and background lighting



CAT IV 600 V  
TRUE RMS

MM 7-1

### BENNING MM 9, MM 10

#### Digital Multimeter of the highest measuring category CAT IV

- highest measuring category CAT IV 600 V allows measurements direct at the source of the low-voltage installation
- precise due to TRUE RMS measuring method
- transmitting measuring results via optical USB interface
- delivery including software *BENNING PC-Win MM 10*



CAT IV 600 V  
TRUE RMS

MM 9



CAT IV 600 V  
TRUE RMS

MM 10

tested and approved



IEC/EN 61010-1  
(DIN VDE 0411-1)



TRUE RMS

MM 11

### BENNING MM 11

#### Precision Digital Multimeter

#### with extraordinary features of performance

- highest measuring accuracy of 0.06 % due to TRUE RMS measuring method and 20000 digit resolution
- an ideal measuring device for recording of measuring processes
- large memory capacity of 1000 storage locations and 40000 storage locations for Data Log functions
- transmitting measuring results via optical USB interface
- delivery including software *BENNING PC-Win MM 11*

### Digital Multimeter

	BENNING MM 4	BENNING MM 7-1	BENNING MM 9	BENNING MM 10	BENNING MM 11
indicating range	4200	6000	6000	6000	20000
basic accuracy	0.5 %	0.08 %	0.5 %	0.5 %	0.06 %
AC voltage	1 mV – 600 V	10 $\mu$ V – 1000 V	0.1 mV – 750 V	0.1 mV – 750 V	1 $\mu$ V – 750 V
DC voltage	1 mV – 600 V	10 $\mu$ V – 1000 V	0.1 mV – 1000 V	0.1 mV – 1000 V	1 $\mu$ V – 1000 V
AC current	0.1 A – 300 A	10 $\mu$ A – 10 A	1 mA – 10 A	1 mA – 10 A	1 $\mu$ A – 10 A
DC current	–	10 $\mu$ A – 10 A	0.1 $\mu$ A – 10 A	0.1 $\mu$ A – 10 A	1 $\mu$ A – 10 A
resistance	0.1 $\Omega$ – 42 M $\Omega$	0.1 $\Omega$ – 40 M $\Omega$	0.1 $\Omega$ – 60 M $\Omega$	0.1 $\Omega$ – 60 M $\Omega$	10 m $\Omega$ – 2 G $\Omega$
continuity/diode	yes/yes	yes/yes	yes/yes	yes/yes	yes/yes
frequency	–	0.01 Hz – 100 kHz	1 Hz – 60 MHz	1 Hz – 60 MHz	0.01 Hz – 1 MHz
capacity	–	1 nF – 10 mF	1 pF – 6 mF	1 pF – 6 mF	1 pF – 40 mF
temperature	–	-40 °C up to +400 °C	–	–	-200 °C up to +1200 °C
volt sensor	–	yes	–	–	–
interface	–	–	–	USB	USB
software	–	–	–	PC-Win MM 10	PC-Win MM 11
memory	HOLD	HOLD, MAX/MIN	HOLD, MAX/MIN	HOLD, MAX/MIN	1000 memory locations
Data Log function	–	–	–	–	40000 memory locations
measuring method	RMS	TRUE RMS	TRUE RMS	TRUE RMS	TRUE RMS
measuring category	CAT III 300 V	CAT IV 600 V	CAT IV 600 V	CAT IV 600 V	CAT III 600 V
item no.	044073	044085	044078	044079	044080

### BENNING PC-Win MM 10/MM 11

#### Software for logging and analysis

- software for reading and logging of measurement series
- visualisation of measurement series via line diagram and table
- scanning rate variable from 0.5 sec. up to 10 min.
- storage of measurement series as text file



Software *PC-Win MM 10/MM 11*



All Digital Multimeters  
including protective case,  
safety leads and battery set.



# Digital Current Clamp Multimeter

## BENNING CM 1-1 – CM 1-3, CM 2, CM 3, CC 1, CC 2

### BENNING CM 1-1, CM 1-2 and CM 1-3

#### Digital Current Clamp Multimeter for AC current Innovative technology, practical design

- safe current measuring up to 400 A AC
- measuring inputs for voltage, resistance, continuity and diode test
- integrated volt sensor signals phase voltages by means of an acoustic signal and a red LED signal (CM 1-3)
- it localizes cable breaks and defective lamps in exposed cables (cable reel, light chains) via the feeding side of the phase (CM 1-3)

### BENNING CM 2 and CM 3

#### Digital Current Clamp Multimeter for AC/DC current

- safe and non-contact measuring of high currents
- DC and AC current measuring up to 600 A AC/DC
- measurement of low currents (automotive, photovoltaics, industry) (CM 2)
- measuring inputs for voltage, resistance and continuity test (CM 2)



Our best seller!



### BENNING CC 1 and CC 2

#### Current Clamp Adapter for Multimeter

- safe AC current measuring up to 200 A/400 A
- connection via 4 mm safety measuring leads
- output: 1 mV AC/1 A AC (CC 1), 1 mA AC/1 A AC (CC 2)



tested and  
approved



IEC/EN 61010-1  
(DIN VDE 0411-1)



All Digital Current Clamps  
Including protective case,  
Safety measuring leads and  
battery set.

#### Digital Current Clamp Multimeter/Current Clamp Adapter

	BENNING CC 1	BENNING CC 2	BENNING CM 1-1	BENNING CM 1-2	BENNING CM 1-3	BENNING CM 2	BENNING CM 3
indicating range	—	—	2000	2000	2000	4000	2000
basic accuracy	1.9 %	1 % – 3 %	2 %	1 %	1 %	0.5 %	1.9 %
AC voltage	—	—	—	0.1 V – 600 V	0.1 V – 750 V	0.1 mV – 600 V	—
DC voltage	—	—	—	0.1 V – 600 V	0.1 V – 1000 V	0.1 mV – 600 V	—
AC current	1 A – 400 A	0.5 A – 200 A	10 mA – 400 A	0.1 A – 400 A	0.1 A – 200 A	10 mA – 300 A	0.1 A – 600 A
DC current	—	—	—	—	—	10 mA – 300 A	0.1 A – 600 A
resistance	—	—	—	0.1 Ω – 20 MΩ	0.1 Ω – 20 MΩ	0.1 Ω – 40 MΩ	—
continuity/diode	—/—	—/—	—/—	yes/—	yes/yes	yes/—	—/—
frequency	—	—	—	—	—	—	—
effective power	—	—	—	—	—	—	—
power factor (cos φ)	—	—	—	—	—	—	—
temperature	—	—	—	—	—	—	—
volt sensor	—	—	—	—	yes	—	—
memory	—	—	HOLD, MAX	HOLD	HOLD	HOLD, MAX	HOLD
measuring method	—	—	RMS	RMS	RMS	RMS	RMS
max. clamp opening	30 mm	21 mm	30 mm	30 mm	16 mm	25 mm	38 mm
measuring category	CAT III 300 V	CAT III 600 V	CAT III 600 V	CAT III 600 V	CAT IV 600 V	CAT III 300 V	CAT III 300 V
item no.	044037	044110	044061	044062	044063	044035	044031



# Digital Current Clamp Multimeter

## BENNING CM 4 – CM 9

### BENNING CM 4, CM 6, CM 7

#### Digital Current Clamp Multimeter of the highest measuring category

- precise due to TRUE RMS measuring method
- safe current measuring up to 1000 A AC/DC
- highest measuring category CAT IV 600 V offering optimum safety

**NEW!**  
**AUTOTEST-**  
**function**



CAT IV 600 V  
TRUE RMS

CM 5-1

CAT IV 600 V  
TRUE RMS

CM 7  
(CM 6 fig. similar)

tested and  
approved



IEC/EN 61010-1  
(DIN VDE 0411-1)

### BENNING CM 5-1

#### Digital Current-Clamp Multimeter

- automatic selection of the correct measuring function for TRUE RMS voltage/current (AC/DC), resistance, continuity and diode test
- safe and easy operation – measuring errors due to incorrect measuring range selection are excluded
- short response time due to 5 scanning values per second
- voltage measurement with low input impedance (LoZ) to suppress capacitively/inductively induced voltages

### BENNING CM 8

#### Power Current-Clamp Multimeter

#### Power analysis for single-phase and three-phase mains

- TRUE-RMS measurements up to 1000 V, 600 A AC/DC
- effective power measurements up to 600 kW
- calculation of the power factor  $\cos \phi$
- indication of the load type (inductive, capacitive)
- bipolar phase sequence test in three-phase mains
- measuring inputs for voltage, resistance, continuity, diode, frequency and temperature
- measurement of inrush currents (motors etc.)

### BENNING CM 9

#### Leakage Current Clamp with a Resolution of 1 $\mu$ A

#### The alternative solution for insulation measurements


- measurement of leakage currents and differential currents in electrical systems (VDE 0100) and devices (VDE 0701-0702, BGV A3, BetrSichV (= German Health and Safety at Work Regulations))
- highest resolution of 1  $\mu$ A in the 6 mA measuring range
- measurement without switch-off during normal operation of the system/device, the perfect solution for preventive maintenance
- precise and reproducible measuring results up to 100 A
- optimum screening against external magnetic fields



TRUE RMS

CM 8  
(CM 4 fig. similar)

#### Differential current measurement method with BENNING CM 9

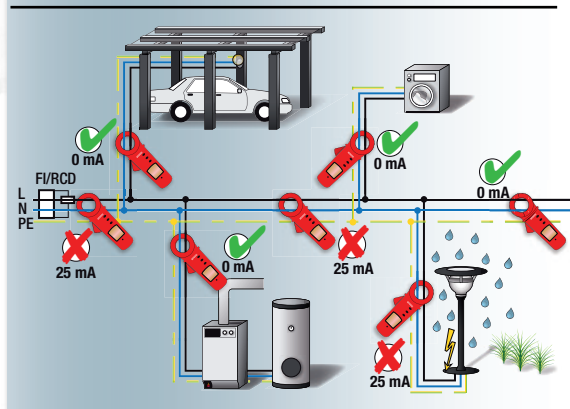

Leakage

CM 9

### Digital Current Clamp Multimeter

	BENNING CM 4	BENNING CM 5-1	BENNING CM 6	BENNING CM 7	BENNING CM 8	BENNING CM 9
indicating range	4000	9999	4000	4000	6000	6000
basic accuracy	0.7 %	0.9 %	0.7 %	0.7 %	0.7 %	1 %
AC voltage	0.1 V – 600 V	1.3 V – 750 V	0.1 V – 750 V	0.1 V – 750 V	10 mV – 1000 V	–
DC voltage	0.1 V – 600 V	0.7 V – 1000 V	0.1 V – 1000 V	0.1 V – 1000 V	10 mV – 1000 V	–
AC current	0.1 A – 600 A	0.9 A – 600 A	0.1 A – 1000 A	0.1 A – 1000 A	0.1 A – 600 A	1 $\mu$ A – 100 A
DC current	–	0.9 A – 600 A	–	0.1 A – 1000 A	0.1 A – 600 A	–
resistance	0.1 $\Omega$ – 400 $\Omega$	1 $\Omega$ – 10 k $\Omega$	0.1 $\Omega$ – 400 $\Omega$	0.1 $\Omega$ – 400 $\Omega$	0.1 $\Omega$ – 20 k $\Omega$	–
continuity/diode	yes/–	yes/yes	yes/–	yes/–	yes/yes	–/–
frequency	1 Hz – 400 Hz	–	1 Hz – 400 Hz	1 Hz – 400 Hz	0.1 Hz – 4 kHz	–
effective power	–	–	–	–	1 W – 600 kW	–
power factor ( $\cos \phi$ )	–	–	–	–	$\pm 0.00$ – 1.00	–
temperature	–	–	–	–	–50 °C up to +1000 °C	–
volt sensor	–	–	–	–	–	–
memory	HOLD, MAX/MIN PEAK	HOLD	HOLD, MAX/MIN PEAK	HOLD, MAX/MIN PEAK, ZERO	HOLD, MAX/MIN PEAK, INRUSH	HOLD, PEAK
measuring method	RMS	TRUE RMS	RMS	TRUE RMS	TRUE RMS	RMS
max. clamp opening	37 mm	35 mm	53 mm	53 mm	40 mm	40 mm
measuring category	CAT III 600 V	CAT IV 600 V	CAT IV 600 V	CAT IV 600 V	CAT III 600 V	CAT III 300 V
item no.	044056	044066	044058	044059	044064	044065



# BENNING ST 710 Appliance Tester (VDE 0701-0702) mobile and network-independent testing of electrical appliances


## BENNING ST 710

### Battery-operated Appliance Tester for mobile testing of electrical devices

- testing in compliance with DIN VDE 0701-0702 (EN 62638), BGV A3, BetrSichV (German Health and Safety at Work Regulations), ÖVE/ÖNORM E 8701, NEN 3140
- easy - operation by means of three keys
- quick - complete testing within 10 seconds
- mobile - testing can be made network-independently

### Application

Safety-related testing of electrical devices/work equipment such as e.g. electrical devices/tools with ON/OFF switch, motorized equipment, lamps, cable reels, multiple distributors and household appliances. The protective conductor current/contact current is measured by means of the **alternative leakage current measurement method**.

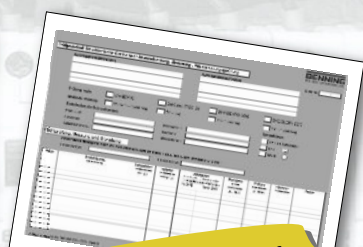

Forms for test certificates for "Testing of electrical devices" are available for download free of charge at [www.benning.de](http://www.benning.de)!




Test badges

### Features BENNING ST 710

- automatic testing procedure for devices of class I (key 1), class II/III (key 2) and line test (key 3)
- testing of cable reels, multiple distributors and device connecting cables with rubber connector
- measuring result with "pass/fail" information
- limiting values preset in compliance with DIN VDE standard
- indication of correct function key in case of incorrect operation and if the test sample is not switched on
- sufficient battery capacity (6 x 1.5 V, mignon, AA, IEC LR6) for > 2500 test samples
- three-phase test objects can be tested by means of optional measuring adapter

### Measuring functions

- protective conductor resistance with a testing current of 200 mA DC and automatic polarity reversal
- insulating resistance with a testing voltage of 500 V DC
- protective conductor current and contact current by means of alternative leakage current measurement method
- voltage measurement on external shock-proof socket (L-N, L-PE, N-PE)

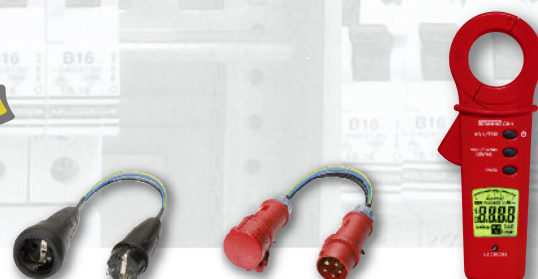


Shock-proof socket onto shock-proof plug for CM 9

16 A/32 A CEE coupling onto CEE plug, 5-pin, for CM 9

Leakage  
CM 9

### Differential current measurement method with BENNING CM 9

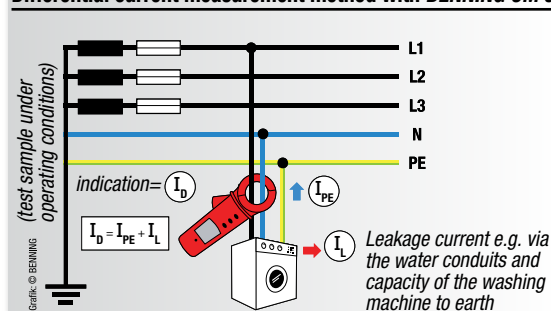

ST 710  
050309: with socket of type E (B/F/CZ/SK/PL)  
050315: with socket of type CH (CH)

### BENNING ST 710 Battery-operated Appliance Tester

	BENNING ST 710
indication	graphic display
protective conductor resistance	0.05 $\Omega$ – 20 $\Omega$
insulating resistance (500 V DC)	0.1 M $\Omega$ – 20 M $\Omega$
protective conductor current/ contact current by means of alternative leakage current measurement method	0.1 mA – 20 mA
line test	R <sub>PE</sub> , R <sub>ISO</sub> , short-circuit test and continuity test of phase conductor (L) and neutral conductor (N)
voltage	50 V – 270 V
scope of delivery	carrying case, test cable with alligator clip, appliance cable, battery set
item no.	050308

### Optional accessories for BENNING ST 710/ST 720/ST 750

test badges "next test" (300 pieces)

item no. 756212

measuring adapters for three-phase loads (passive)

(see page 9)

item no. 044122/044123

leakage Current Clamp BENNING CM 9 for the measurement of differential current, protective conductor current and load current of single-phase and three-phase loads

(see page 7)

item no. 044065

measuring adapters for leakage current clamp BENNING CM 9

single-phase, conductors led through individually and with double insulation shock-proof socket/shock-proof plug

item no. 044131

three-phase, conductors led through individually and with double insulation 16 A CEE coupling-CEE plug, 5-pin

item no. 044127

32 A CEE coupling-CEE plug, 5-pin

item no. 044128

See page 9 for further accessories



Scope of delivery BENNING ST 710



# BENNING ST 720 Appliance Tester (VDE 0701-0702)

## testing of electrical appliances under operating conditions

### BENNING ST 720

#### Mains-operated and battery-operated Appliance Tester for mobile testing of electrical devices

- testing in compliance with DIN VDE 0701-0702 (EN 62638), BGV A3, BetrSichV (German Health and Safety at Work Regulations), ÖVE/ÖNORM E 8701, NEN 3140
- quick – testing within a few seconds
- all-in-one – appliance tester and RCD tester in one single device
- unique – testing of single-phase and three-phase devices under operating conditions

#### Application

Testing of devices **with mains voltage-dependent switching elements/mains-supply units/relays** such as controlled devices/tools, devices of information and communication technology as well as of devices which can be tested completely with mains voltage only.

In mains operating mode, the protective conductor current/contact current is measured by means of the required **differential current/direct measurement method**.

#### Features BENNING ST 720

- mains operating mode for tests under operating conditions
- battery operating mode for mobile testing
- automatic testing procedure for devices of class I (key 1), class II/III (key 2) and line test (key 1)
- reduction of the ISO testing voltage to 250 V/ 500 V for devices with overvoltage arresters/electronic devices
- testing of RCDs with 30 mA
- measuring result with “pass/fail” information
- limiting values preset in compliance with DIN VDE standard
- indication of correct function key in case of incorrect operation, overload and if the test sample is not switched on
- sufficient battery capacity (6 x 1.5 V, mignon, AA, IEC LR6) for > 2500 test samples


### BENNING ST 720

#### Mains-operated and battery-operated Appliance Tester

	BENNING ST 720
<b>indication</b>	graphic display
<b>protective conductor resistance</b>	0.05 $\Omega$ – 20 $\Omega$
<b>insulation resistance (250 V/500 V DC)</b>	0.1 M $\Omega$ – 20 M $\Omega$
<b>protective conductor current/contact current by means of</b>	
- differential current measurement method	0.25 mA – 20 mA
- alternative leakage current measurement method	0.25 mA – 20 mA
- direct measurement method	0.1 mA – 2 mA
<b>line test</b>	$R_{PE}$ , $R_{ISO}$ , short-circuit test and continuity test of phase conductor (L) and neutral conductor (N)
<b>testing current of RCD</b>	30 mA
<b>tripping time</b>	10 ms – 500 ms
<b>protective conductor current of three-phase test objects under operating conditions (optional)</b>	0.25 mA – 10 mA
<b>voltage</b>	50 V – 270 V
<b>scope of delivery</b>	carrying case, test cable with alligator clip, mains connection cable, appliance cable, battery set
<b>item no.</b>	050312

#### Measuring functions

- protective conductor resistance with a testing current of 200 mA DC and automatic polarity reversal
- insulating resistance with a testing voltage of 250 V/500 V DC
- mains operating mode: protective conductor current/contact current by means of differential current/direct measurement method with automatic mains pole reversal
- battery operating mode: protective conductor current/contact current by means of alternative leakage current measurement method
- tripping time measurement of RCDs with 30 mA
- voltage measurement on external shock-proof socket (L-N, L-PE, N-PE)
- active testing of three-phase devices under operating conditions by means of optional measuring adapters (item no. 044140/044141)

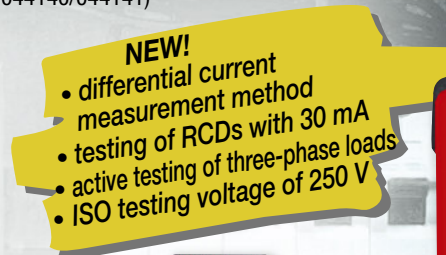

Shock-proof 4 mm plug for devices without shock-proof plug for ST 710/ST 720



ST 720  
050313: with socket of type E (B/F/CZ/SK/PL)

#### Optional accessories for BENNING ST 720

##### measuring adapters for three-phase loads (active)

for measuring  $R_{PE}$ ,  $R_{ISO}$  and  $I_{EA}$  under operating conditions

16 A CEE 5-pin active

item no. 044140

32 A CEE 5-pin active

item no. 044141

##### BENNING ST 710/ST 720/ST 750

##### measuring adapters for three-phase loads (passive)

for measurement of  $R_{PE}$ ,  $R_{ISO}$  and  $I_{EA}$

16 A CEE coupling, 5-pin - shock-proof plug

item no. 044122

32 A CEE coupling, 5-pin - shock-proof plug

item no. 044123

##### measuring adapters for single-phase loads

for measurement of  $R_{PE}$ ,  $R_{ISO}$  and  $I_{EA}$

16 A CEE coupling, 3-pin - shock-proof plug

item no. 044143

32 A CEE coupling, 3-pin - shock-proof plug

item no. 044144

##### shock-proof 4 mm plug for devices without

shock-proof plug

item no. 044142

See page 8 for further accessories



Scope of delivery BENNING ST 720



# BENNING ST 750 Appliance Tester (VDE 0701-0702, VDE 0751) testing of electrical appliances and medical electrical devices

## BENNING ST 750

### Appliance Tester for testing electrical appliances and medical electrical devices

- testing according to
  - DIN VDE 0701-0702 (EN 62638): testing of electrical appliances/equipment
  - DIN VDE 0751-1 (EN 62353): testing of medical electrical devices, such as hospital bed
  - German Health and Safety at Work Regulation
- innovative - indication and operation via colour LCD touchscreen
- powerful - 2 GB memory card for more than 100000 tests
- all in one - one appliance tester for all VDE tests

### Features

- automatic and auto-configurable testing procedures
- complete test sample/customer database can be stored on SD card and thus is directly available at the place of inspection
- management of large test sample inventories with more than 100000 storable device tests per 2 GB SD card
- direct entry via touchscreen and external keyboard/mouse
- measuring result with "pass/fail" indication and acoustic warning signal, if the test has been failed
- help function and schematic connecting diagrams
- separate 4 mm test sockets and IEC connector
- 3 x USB interface for PC, external keyboard and RFID reader/writer
- 1 x RS 232 interface for barcode scanner, printer and SD card slot
- free firmware update possible via SD card/USB stick

### Measuring functions

- protective conductor resistance with 200 mA DC and a testing current of 10 A AC
- insulating resistance with a testing voltage of 50 V to 500 V (adjustable)
- protective conductor current/contact current via differential current measurement method, alternative leakage current measurement method or direct measurement
- functional test with indication of leakage current, mains voltage, load current, effective power, apparent power and measuring time
- testing of device connecting cables and extension cables
- testing of three-phase loads by means of optional measuring adapters
- additionally for VDE 0751-1: device leakage current, leakage current of application part type B, type BF and type CF

### BENNING ST 750 Appliance Tester (VDE 0701-0702, VDE 0751)

	BENNING ST 750
display	5.7" colour LCD touchscreen, ¼ VGA
protective conductor resistance	1 mΩ – 20 Ω
insulation resistance	0.1 MΩ – 100 MΩ
protective conductor current/ contact current via differential current measurement method, alternative leakage current measurement method or direct measurement	0.05 mA – 25 mA
device leakage current and leakage current of the applied part for medical electrical devices	0.05 mA – 25 mA
line test	R <sub>PE</sub> , R <sub>ISO</sub> , I <sub>PE</sub> , short-circuit test and continuity test of phase conductor (L) and neutral conductor (N)
voltage/current	1 V - 360 V/0.1 A - 16 A
effective power/apparent power	20 W - 4000 W
interface	3 x USB, 1 x RS 232
dimensions/weight	405 x 330 x 165 mm/approx. 6 kg
scope of delivery	tester in waterproof (IP 67), break-proof case, test cable with alligator clip, appliance cable, input stylus, 2 GB SD card
item no.	050310



Leakage

CM 9



ST 750



Touchscreen

Application by  
touchscreen!



Industrial keyboard

### Set at a special price, consisting of

- |  |                 |
|--|-----------------|
| • appliance tester <b>BENNING ST 750</b>               | item no. 050310 |
| • software <b>BENNING PC-Win ST 750</b>                | item no. 047001 |
| • barcode scanner                                      | item no. 009369 |
| • barcode labels (1000 pieces)                         | item no. 756301 |
| • test badges „next test“<br>(300 pieces) (see page 8) | item no. 756212 |

### Optional accessories for BENNING ST 750

#### measuring adapters for three-phase loads (passive)

for measurement of R<sub>PE</sub>, R<sub>ISO</sub> and I<sub>EA</sub>

16 A CEE coupling, 5-pin - shock-proof plug item no. 044122

32 A CEE coupling, 5-pin - shock-proof plug item no. 044123

**Leakage Current Clamp BENNING CM 9** for measurement of differential current, protective conductor current, load current of loads (see pages 7/8) item no. 044065

**measuring adapters for leakage current clamp BENNING CM 9**  
**single-phase**, conductors led through individually and with double insulation  
shock-proof socket/shock-proof plug item no. 044131

**three-phase**, conductors led through individually and with double insulation  
16 A CEE-CEE, 5-pin item no. 044127

32 A CEE-CEE, 5-pin item no. 044128

See pages 8 and 9 for further accessories



# BENNING PC-Win ST 750 documentation software

## helpful accessories for efficient testing



Software PC-Win ST 750

### Software

#### BENNING PC-Win ST 750

- professional PC software for the management and documentation of recorded measuring values
- explicit database structure with customer, department, test sample and test result including the test date
- easily creating and copying customers and test samples
- printing of the test results as single log and serial log
- bidirectional data transmission PC ↔ BENNING ST 750
- import and export function of existing test sample and customer databases via MS Excel®
- free software update to the latest version available per download

### Portable log printer BENNING PT 1 with Bluetooth®

- the perfect solution for printing test records rapidly on site
- high printing speed due to direct thermal printing process
- data transmission via Bluetooth® or RS232 interface
- power supply by means of rechargeable NiMH battery pack
- width/length of thermographic paper rolls: 58 mm/13 m
- included in delivery: 6 V battery pack, mains supply unit, belt clip, wall fastening, Bluetooth® dongle for BENNING ST 750, 2 rolls of thermographic paper and RS232 cable



BENNING PT 1 printer




Roll of thermographic paper



Barcode label

### Test sample identification via barcode scanner/labels

- particularly suited for repetitive testing and identification of large test sample inventories in offices, administrations etc.
- highly adhesive PVC barcode labels with barcode and consecutive numbering (reels of 1000 pieces)
- barcode scanner with RS 232 interface supports all conventional barcodes such as UPC/EAN/JAN, Code 39, Code 128 etc.

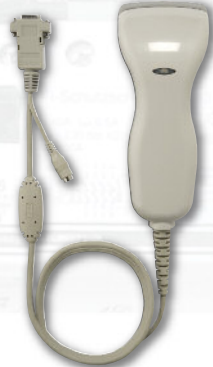

Barcode scanner

### Compact industrial keyboard

- high-quality functional keyboard with integrated trackball for comfortable input of test sample/customer data on site
- compact keyboard dimensions for safe transport in the BENNING ST 750 appliance tester
- data transmission via Bluetooth® or USB interface
- increased protection against dust and splash water



industrial keyboard

### Test sample identification via RFID reader/writer or transponder

- test sample identification via radio frequency ("Radio Frequency Identification") without visual contact or direct contact of the transponder
- RFID technology stores the test sample data/measuring values directly onto a memory chip (transponder) on the test sample
- particularly suited for rough industrial environments
- tag-type transponder for attachment by means of cable ties
- ring clip transponder for attachment to the mains supply line
- epoxy resin transponder (self-adhesive) for attachment into the housing or onto the surface of the housing
- transponder frequency: HF 13.56 MHz; memory depth: 10 kbit



RFID reader/writer



Tag-type transponder



Ring clip transponder



Self-adhesive epoxy resin transponder

### Optional accessories for BENNING ST 750

<b>software BENNING PC-Win ST 750</b> on CD-ROM incl. USB cable	<b>item no. 047001</b>
<b>barcode scanner</b> with RS 232 interface	<b>item no. 009369</b>
<b>barcode labels</b> with consecutive numeric representation (1000 pieces)	<b>item no. 756301</b>
<b>printer BENNING PT 1</b> with Bluetooth® and RS 232 interface	<b>item no. 044150</b>
<b>roll of thermographic paper</b> (20 pieces)	<b>item no. 044151</b>

See pages 8 and 9 for further accessories

<b>industrial keyboard</b> with USB interface	<b>item no. 044154</b>
<b>RFID reader/writer</b> with USB interface	<b>item no. 009370</b>
<b>RFID transponder, tag-type</b> , height/width: 43 x 34 mm (100 pieces)	<b>item no. 044139</b>
<b>RFID transponder, ring clip</b> , inside diameter: 7.5 mm (100 pieces)	<b>item no. 044138</b>
<b>RFID transponder, self-adhesive</b> , diameter/height: 17 mm/2.5 mm (100 pieces)	<b>item no. 044137</b>



## Safety Instruments **BENNING IT 101, IT 110 and IT 120 B** testing of electrical systems in compliance with the standards

### **BENNING IT 101**

#### **Insulation and Resistance Measuring Device**

- measurement of insulating resistance and calculation of the resulting leakage current
- testing voltages of 50 V, 100 V, 250 V, 500 V and 1000 V
- selectable limiting values for ISO measurement, green LED for "PASS", red LED for testing voltage/external voltage
- resistance measurement with a testing current of 200 mA for testing protective conductor connections
- measurement of polarization index (PI) and dielectric absorption rate (DAR)
- switchable probe tip for triggering the measuring process
- internal memory for 100 measuring values per measuring function
- TRUE RMS voltage measurement with low-pass filter
- including case, switchable probe tip, silicone measuring leads, magnetic hook, alligator clips, rubber protective frame and batteries



CAT IV 600 V

TRUE RMS

IT 101



Scope of delivery BENNING IT 101

### **BENNING IT 101**

#### **Insulation and Resistance Measuring Device**

	<b>BENNING IT 101</b>
<b>indicating range</b>	4000 digits (illumination)
<b>low-impedance resistance</b>	0.01 $\Omega$ – 40 $\Omega$
<b>insulation resistance</b>	1 k $\Omega$ – 20 G $\Omega$
<b>resistance</b>	0.01 $\Omega$ – 40 k $\Omega$
<b>voltage</b>	0.1 V – 600 V AC/DC TRUE RMS
<b>supplementary function</b>	leakage current, polarization index (PI), dielectric absorption rate (DAR), automatic discharge function, null balance of the measuring leads
<b>measured value memory</b>	500 measuring results
<b>measuring category</b>	CAT IV 600 V
<b>item no.</b>	044033

### **BENNING IT 110, BENNING IT 120 B**

#### **Installation Testers**

#### **For safety tests on electrical systems according to DIN VDE 0100 and IEC 60364**

Multifunctional installation testers for complete testing and efficient troubleshooting of electrical systems

- measurement of the protective conductor line and of the equipotential bonding line with a testing current of 200 mA
- measurement of the insulation resistance with testing voltages of 100 V, 250 V, 500 V and 1000 V
- line impedance and loop impedance measurement (optional without tripping of the RCD) with calculation of the short-circuit current (PFC/PSC)
- complete testing of RCDs with nominal fault currents of 10/30/100/300/500/1000 mA
- measurement of contact voltage (without tripping), tripping time and tripping current (ramp test) of residual current operated device (RCD)
- phase-sequence testing in three-phase mains
- voltage measurement up to 500 V and online voltage monitoring



IT 110

### **BENNING IT 110**

#### **Installation Tester**

	<b>BENNING IT 110</b>
<b>display</b>	graphic display (illuminated)
<b>low-impedance resistance</b>	0.01 $\Omega$ – 2000 $\Omega$
<b>insulation resistance</b>	1 k $\Omega$ – 1000 M $\Omega$
<b>line impedance (L-N/L)</b>	0.01 $\Omega$ – 2000 $\Omega$
<b>loop impedance (L-PE)</b>	0.01 $\Omega$ – 2000 $\Omega$
<b>short-circuit current</b>	0.01 A – 24.4 kA
<b>RCD testing</b>	tripping time, tripping current, contact voltage
<b>type AC, A</b>	yes
<b>phase sequence</b>	yes
<b>voltage, frequency</b>	1 V – 500 V, 45 Hz – 65 Hz
<b>item no.</b>	044100



# BENNING IT 110, IT 120 B Installation Testers

## the perfect solution for efficient testing

### Features

#### BENNING IT 110, BENNING IT 120 B

- all measuring functions can be selected directly by means of a rotary switch
- switchable probe tip for releasing the measuring process
- graphic display and help function with connecting diagram
- complete measuring result with measuring parameters, limiting value and symbols for PASS/FAIL
- current supply by means of 6 NiMH storage batteries (AA) with charger

### Additional functions

#### BENNING IT 120 B

in addition to the BENNING IT 110:

- testing of universal current-sensitive RCDs of type B
- current measurement (TRUE RMS) by means of current clamp adapter (optional)
- illumination measurement by means of lux sensor (optional)
- earthing measurement by means of three-wire measuring method (optionally with earthing set)
- integrated measured value memory for 500 measurements
- USB and RS 232 interface
- BENNING PC-Win IT 120 B software included in delivery

### Logging software with Test Log according to ZVEH

#### BENNING PC-Win IT 120 B

- PC software for reading the stored test data
- creation of test logs with handover and status report according to ZVEH
- structuring and export function of the test data



Test log according to ZVEH

Scope of delivery of the BENNING IT 120 B



IT 120 B

**NEW!**  
Testing of universal  
current-sensitive  
RCDs of type B

### INFORMATION:

RCDs of type B are increasingly used for multi-phase equipment of power electronics. In case of a fault, these devices also detect smooth DC fault currents and high-frequency AC fault currents.

BENNING CC 2



BENNING luxmeter  
type B



Earthing set

### BENNING IT 120 B Installation Testers

	BENNING IT 120 B
display	graphic display (illuminated)
low-impedance resistance	0.01 $\Omega$ – 2000 $\Omega$
insulation resistance	1 k $\Omega$ – 1000 M $\Omega$
line impedance (L-N/L)	0.01 $\Omega$ – 2000 $\Omega$
loop impedance (L-PE)	0.01 $\Omega$ – 2000 $\Omega$
short-circuit current	0.01 A – 24.4 kA
RCD testing type AC, A, B	tripping time, tripping current, contact voltage
phase sequence	yes
voltage, frequency	1 V – 500 V, 45 Hz – 65 Hz
earth resistance	0.01 $\Omega$ – 2000 $\Omega$
current (TRUE RMS)	0.1 mA – 20 A (by means of the clamp)
luminous intensity	0.01 lux – 20 klux (by means of sensor)
measured value memory	500 measuring results
interfaces	USB, RS 232
incl. software	BENNING PC-Win IT 120 B
item no.	044102

### Scope of delivery of the installation testers

	BENNING IT 110	BENNING IT 120 B
tester incl. carrying case / carrying strap	X	X
switchable probe tip	X	X
test cable with shock-proof plug	X	X
universal test cable, 3 x L = 1.5 m	X	X
3 x test probe, 3 x crocodile clips	X	X
charger with 6 NiMH storage batteries (AA)	X	X
PC software BENNING PC-Win IT 120 B		X
USB and RS 232 cable		X

### Optional accessories for BENNING IT 120 B

current clamp adapter BENNING CC 2	0.5 A – 20 A AC (200 A AC)	item no. 044110
illumination sensor BENNING luxmeter type B	Accuracy: 5 %	item no. 044111
earthing set consisting of 2 earth rods and 3 test cables	(2 x L = 20 m, 1 x L = 4.5 m)	item no. 044113





## Demonstration case for practice-oriented application of testers, measuring instruments and safety instruments

### BENNING DB 1



#### Demonstration case for testing and measuring primary quantities of electrical engineering

- particularly suited for teaching and education purposes, training courses and product presentations
- practice-oriented application of voltage testers/continuity testers, digital multimeters, current clamps and FI/RCD testers
- protected voltage steps of 24 V, 50 V, 120 V, 230 V, 400 V, 690 V AC and 24 V DC by means of isolating transformer
- lamp circuit with ON/OFF switch and current loop for non-contact current measurement (A) by means of a current measuring clamp
- test possibility for polarity, diode and single-pole phase testing
- measuring on resistors and capacitors
- simulation of a reactive voltage (induced voltage) for indication by means of digital multimeter (high-impedance) and suppression by DUSPOL® voltage tester with load connection (low-impedance)
- shock-proof socket with 30 mA FI safety switch for demonstration of the DUSPOL® voltage testers with load connection (FI release) and of FI/RCD testers
- rugged and dust-proof housing type

### BENNING DB 2

#### Demonstration case for practice-oriented application and training concerning VDE 0100 installation testers

- portable case for simulation of electrical systems conforming to standards according to DIN VDE 0100
- realistic presentation of a low-voltage installation of a single-family house (TN/TT system)
- real components such as FI safety switches, shock-proof socket, ON/OFF switch with lamp and current measuring loop of a hot-water tank
- simulated components with connecting terminals for equipotential busbar, ground connection, water conduits and lightning arrester
- fault simulation can be set by means of 5 toggle switches
- measurement of protective conductor resistance ( $R_{PE}$ ), insulating resistance ( $R_{ISO}$ ), loop impedance ( $Z_{L-PE}$ ) and line impedance ( $Z_{L-N}$ )
- 30 mA FI safety switch for measuring release time, release current and contact voltage
- different measuring methods can be used for earthing measurement (two-/three-/four-wire measuring method and without any earth rods by means of a current clamp)
- shock-proof socket for voltage and frequency measurement as well as single-pole testing of the external conductor (phase)
- rugged and dust-proof housing type

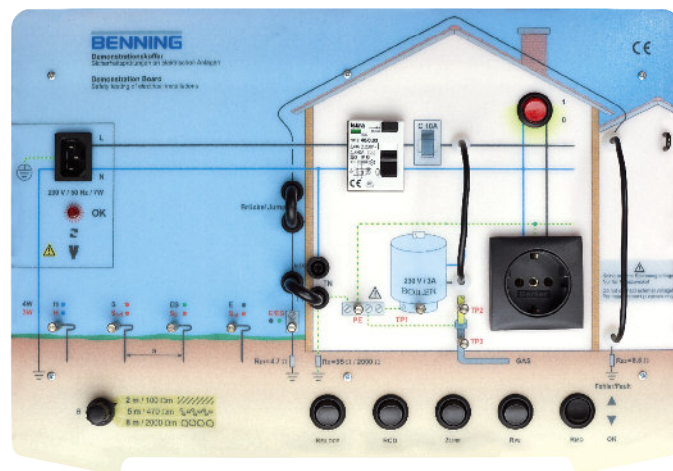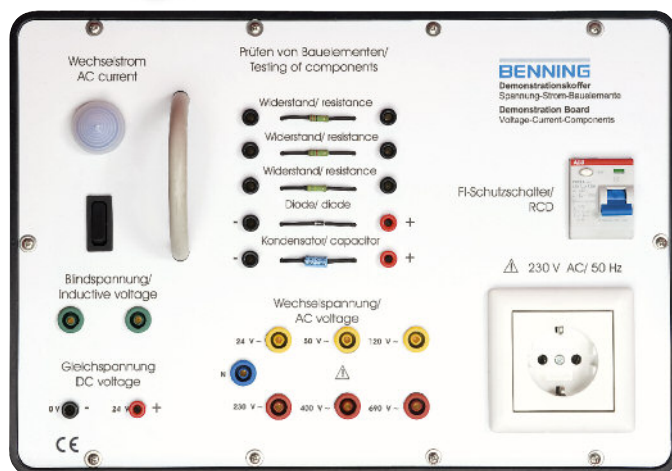

#### Demonstration case

##### BENNING DB 1

power supply	230 V, 50/60 Hz mains connection
dimensions/weight	405 x 330 x 160 mm, approx. 6 kg
scope of delivery	case with mains connection cable
item no.	044132

#### Demonstration case

##### BENNING DB 2

power supply	230 V, 50/60 Hz mains connection
dimensions/weight	450 x 330 x 110 mm, approx. 4,5 kg
scope of delivery	case with mains connection cable
item no.	044133



## Voltage and Continuity Tester

## Phase-Sequence Indicator

### PROFIPOL®

#### Voltage Testers for universal applications

- indicating DC and AC voltage within the range of 6 – 400 V
- indicating steps 6, 12, 50, 120, 230, 400 V
- polarity test for DC voltage
- shock-proof housing made of rugged high-pressure PE material
- compact dimensions and increased grip
- dustproof and waterproof, protection category IP 65

### DUTEST®

#### Continuity and line tester

- reliable detection of faulty wiring, contacting errors and cable interruptions
- quick localization of defective fuses, lamps, lines and short-circuits
- indication of high-impedance (0 – 90 k $\Omega$ ) and low-impedance (0 – 900  $\Omega$ ) resistances
- acoustic indication by means of loud testing buzzer
- visual indication by means of high-contrast light-emitting diodes (LED)
- powerful torch function
- protected against external voltages of up to 400 V

### TRITEST® control

#### Phase-sequence indicator for testing the phase sequence in three-phase mains

- indication of clockwise and anti-clockwise phase sequence
- indication of phase voltages (L1, L2, L3) by means of high-contrast LEDs
- voltage range: 400 – 690 V (50 – 60 Hz)
- bright LED pocket lamp function
- including safety probe tips and alligator clip



PROFIPOL®  
item no. 020022



DUTEST®  
item no. 050155




TRITEST® control  
item no. 020050

### Tips for practical use

- Always observe the five safety rules for “working under voltage”!
- For determining the absence of voltage on electrical systems of up to 1000 V, only use two-pole voltage testers complying with the current IEC/EN 61243-3 standard.
- Always check voltage testers for correct functioning immediately before and after use.
- Voltage testers with connectable load suppress capacitively and inductively induced voltages. Thus, incorrect measurements are excluded!
- Voltage testers for outdoor use must comply at least with protection category IP 44.
- DUSPOL® voltage testers are designed for safe working under voltage. Operating errors due to incorrect measuring range selection are excluded. The handles with grip limit offer the highest safety possible and sufficient distance to the measuring object. The display is arranged directly in the user's field of vision.
- A standards-compliant design of a voltage tester/measuring instrument is confirmed by independent testing and certification institutes by granting a mark of conformity (e.g. VDE/GS mark of conformity).

- Digital multimeters and current clamps with TRUE RMS measuring method offer increased accuracy in case of distorted and non-sinusoidal signal characteristics in industrial use.
- Please take into consideration the high-impedance input resistance (~10 M $\Omega$ ) of a digital multimeter which indicates capacitively and inductively induced voltages and which very often might only simulate the existence of voltage.
- Use digital multimeters and current clamps only for the area of application for which they are designed. The measuring inputs must be marked unambiguously with the measuring category (CAT I – CAT IV) and the maximum nominal voltage to earth.

### Measuring categories CAT I to CAT IV:

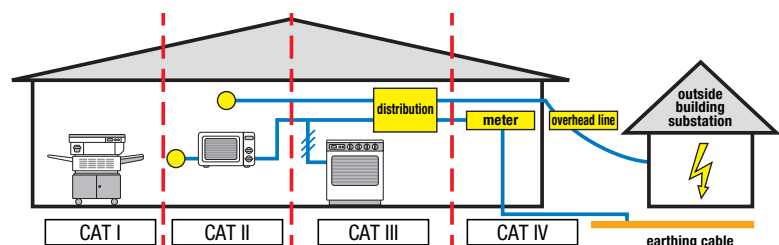



## Accessories for *BENNING* testers and measuring instruments safe – functional – indispensable



### Case for testers and measuring instruments item no. 711019

High-quality cases for testers and measuring instruments for professional storage of all testers and measuring instruments, made of polyester fabric with carrying handle and detachable shoulder strap

### Tester case

item no. 010910

Practical carrying case made of leather cloth with zipper, suitable for all *DUSPOL*® voltage testers, *PROFIPOL*®, *DU-TEST*® and *TRITEST*® control testers



### *BENNING* TA 1

item no. 044124

Ø 4 mm safety crocodile clips, two pieces, red/black, professional equipment, CAT III 1000 V



### *BENNING* TA 2

item no. 044125

set of Ø 4 mm safety measuring leads, six pieces, red/black, professional equipment, consisting of:

- safety measuring leads (silicone), CAT III 1000 V
- safety test probes (4 mm measuring tip), CAT II 1000 V
- safety crocodile clips, CAT III 1000 V



### *BENNING* TA 3

item no. 044126

set of Ø 4 mm safety measuring leads, eight pieces, red/black, professional equipment, CAT III 1000 V, consisting of:

- safety measuring leads (silicone)
- safety test probes (slender measuring tip)
- safety claw clamps
- safety crocodile clips



### *BENNING* TA 4

item no. 044120

magnetic holder for Multimeter and *BENNING* IT 101, 3 pieces, consisting of:

- magnetic holder
- adapter and belt, for attachment of *BENNING* Multimeters to switching cabinets, machine and system parts



### Ø 4 mm safety measuring leads with 2 mm measuring tip

item no. 044146

Ø 4 mm safety measuring leads 2 pieces, red/black, L = 1.40 m, with 2 mm measuring tip CAT IV 600 V/ CAT III 1000 V (with protective caps), CAT II 1000 V (without protective caps)



### Ø 4 mm safety measuring leads with 4 mm measuring tip

item no. 044145

Ø 4 mm safety measuring leads 2 pieces, red/black, L = 1.40 m, with 4 mm measuring tip CAT IV 600 V/ CAT III 1000 V (with protective caps), CAT II 1000 V (without protective caps)



### Set of safety measuring leads for *BENNING* MM 4

item no. 044119

set of Ø 4 mm safety measuring leads, 4 pieces, consisting of:

- safety measuring leads with 2 mm measuring tip
- 2 measuring probes with 2 mm measuring tip



### Temperature probe (type K)

item no. 044121

insertion probe (V4A steel tube) for flexible substances, liquids, gases and air, measuring range: -196 °C to +800 °C, suitable for *BENNING* MM 1-3, MM 7-1, MM 11 and CM 8 digital measuring instruments





## VDE 0701-0702/VDE 0100 seminars sales promotion for specialized trade

### VDE 0701-0702 seminar

#### Testing of electrical appliances/equipment

##### Features:

The seminar addresses qualified electricians, competent persons as well as electrotechnically trained persons who have to do the testing and its documentation according to the DIN VDE 0701-0702 standard for repaired or modified electrical devices or the repetitive testing of electrical devices.

The participants of the seminar will be given an intensive training in order to be able to do this inspection according to regulations considering the optimum use of the **BENNING ST 710/ST 720/ST 750** testers as well as of the **BENNING PC-Win ST 750** logging software. At the end of the seminar, the participants will get a certificate of attendance.

##### Content:

Regulations, definitions, measurements (continuity of the protective conductor, insulation, protective conductor current/contact current), test sample management and documentation according to ZVEH.

**Duration:** approx. 4 hours

**Seminar fee:** 295.00 € per company/specialized company for 1-2 persons, 147.50 € for every additional person

**Seminar venue:** BENNING GmbH & Co. KG,  
phone +49 (0) 28 71/93 - 470

**Seminar dates:** to be agreed upon

We are pleased to send you our directions and to recommend to you hotels in direct vicinity of the seminar venue.

### VDE 0100 seminar

#### Testing of electrical installations of up to 1000 V

##### Features:

The seminar addresses qualified electricians who have to do the testing and its documentation of electrical installations of up to 1000 V according to the DIN VDE 0100 standard.

The participants of the seminar will be given an intensive training in order to be able to do this inspection independently and according to regulations considering the optimum use of the **BENNING IT 101/IT 110/IT 120 B** testers as well as of the **BENNING PC-Win IT 120 B** logging software.

At the end of the seminar, the participants will get a certificate of attendance.

##### Content:

Regulations, definitions, measurements (insulation, continuity of the protective conductor, loop impedance/line impedance, short-circuit current, FI/RCD testing, earthing, rotary field, voltage, frequency), management of measuring data and documentation according to ZVEH.



For further information  
visit our website  
[www.benning.de](http://www.benning.de)

**free  
24h service**

**Service Hotline:  
+49 (0) 28 71/93 - 555**

### Sales promotion for specialized trade

For sales promotion and for presentation purposes, several presentation possibilities are available for the specialized trade. Please do not hesitate to contact us.

#### Free vertical display cabinet

When purchasing an assortment variant for a display cabinet, the vertical display cabinet will be given to the specialized trade free of charge. The glass cabinet is equipped with a revolving door with safety lock, three shelves, bottom and top made of light beech veneer and device labels with technical data.

Dimensions (w x d x h): 430 x 370 x 1620 mm

#### Customized sales promotion brochures

Upon agreement, we offer customized sales promotion brochures for the specialized trade with imprint of source of supply.

BENNING is pleased to submit an individual offer under:

Phone: +49 (0) 28 71/93 - 420 • Fax: +49 (0) 28 71/93 - 429

[www.benning.de](http://www.benning.de) • E-Mail: [dupol@benning.de](mailto:dupol@benning.de)




Showcase



Wall display with  
promotion brochures



Holder with leporellos

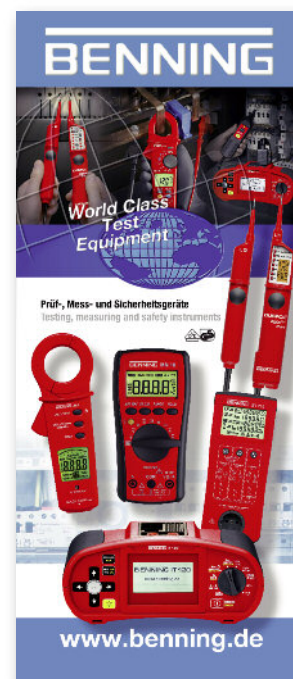

Roll-up



## The optimal selection of testers and measuring instruments basic equipment that proved to be reliable

### BENNING Tester and Measuring Instruments

The selection of convenient kits of testers and measuring instruments depends on the user's professional requirements and experience. Moreover, the testers and measuring instruments shall guarantee safety and reliability for many years.

BENNING testers and measuring instruments comply with these requirements in any way possible and guarantee a high degree of inspection reliability and measuring quality for decades.

The following recommendations of testers and measuring instruments are adapted to the professional requirements of apprentices, craftsmen, master craftsmen as well as for service technicians and industrial master craftsmen. Choose the optimal selection of BENNING testers and measuring instruments, too!

### Order pays off!

The practical and large case for testers / measuring instruments for professional storage of the device made of hard-wearing polyester fabric (black), with carrying handle and detachable shoulder strap.



device case  
item no. 711019

### Recommendations for training

- DUSPOL® expert, item no. 050253
- DUTEST®, item no. 050155
- BENNING MM 2, item no. 044028
- device case, item no. 711019



### Recommendations for electrician

- DUSPOL® expert, item no. 050253
- BENNING MM 1-3, item no. 044083
- BENNING CM 2, item no. 044035
- device case, item no. 711019



### Recommendations for electrical engineering master technician

- DUSPOL® digital LC, item no. 050258
- BENNING MM 7-1, item no. 044085
- BENNING CM 5-1, item no. 044066
- device case, item no. 711019



### Recommendations for industrial master craftsman

- DUSPOL® digital LC, item no. 050258
- TRITEST® control, item no. 020050
- BENNING MM 7-1, item no. 044085
- BENNING CM 8, item no. 044064
- BENNING IT 101, item no. 044033
- device case, item no. 711019



### Recommendations for testing of electrical appliances/systems

- BENNING ST 720, item no. 050312  
(more options see page 9) alternative  
BENNING ST 750, item no. 050310
- BENNING IT 120 B, item no. 044102





## Recommendations for workshop equipment

**Recommendations for workshop equipment in electrician's companies according to the guidelines of ZVEH and VDEW (German association of electricity industry)**

<b>Required testers and measuring instruments</b>	<b>Tester/measuring instrument complying with standard</b>	<b>Single device version I</b>	<b>Single and/or combined device version II</b>	<b>Single and/or combined device version III</b>
two-pole voltage tester	DIN VDE 0682-401 IEC/EN 61243-3	DUSPOL® analog plus item no. 050257 (see page 2 and 3)	DUSPOL® expert item no. 050253 (see page 2 and 3)	DUSPOL® digital LC item no. 050258 (see page 2 and 3)
voltage (min. 600 V) and current measuring instruments (min. 15 A)	DIN VDE 0411-1 IEC/EN 61010-1	MM 2 item no. 044028 (see page 4)	MM 1-3 + CC 1 item no. 044084 + 044037 (see page 4 and 6)	MM 7-1 + CC 1 item no. 044085 + 044037 (see page 5 and 6)
current clamp measuring instruments (min. 300 A)	DIN VDE 0411-1 IEC/EN 61010-1	CM 2 item no. 044035 (see page 6)	CM 5-1 item no. 044066 (see page 7)	CM 8 item no. 044064 (see page 7)
insulation tester	DIN VDE 0413-2 IEC/EN 61557-2	IT 101 item no. 044033 (see page 12)		
loop resistance tester	DIN VDE 0413-3 IEC/EN 61557-3	–		
ohmmeter	DIN VDE 0413-3 IEC/EN 61557-4	IT 101 item no. 044033 (see page 12)	IT 110 item no. 044100 (see page 12 and 13)	IT 120 B item no. 044102 (see page 12 and 13)
RCD tester	DIN VDE 0413-6 IEC/EN 61557-6	–		
phase sequence indicator	DIN VDE 0413-7 IEC/EN 61557-7	TRITEST® item no. 020050 (see page 15)		
measuring instrument for testing electrical equipment (DIN VDE 0701-0702, 0751-1)	DIN VDE 0404-1 DIN VDE 0404-2	ST 710 item no. 050308 (see page 8)	ST 720 item no. 050312 (see page 9)	ST 750 item no. 050310 (see page 10)

### Additional ZVEH recommendation

earth resistance tester	DIN VDE 0413-6 IEC/EN 61557-6	–	–	earthing set for IT 120 B item no. 044113 (see page 13)
continuity tester	DIN VDE 0413-7 IEC/EN 61557-7		DUTEST® item no. 050155 (see page 15)	
luxmeter	–	–	–	luxmeter type B for IT 120 B item no. 044111 (see page 13)

### Additional BENNING recommendation

differential current clamp for fault current measurement in electrical devices and systems	DIN VDE 0411-1 IEC/EN 61010-1		CM 9 item no. 044065 (see page 7)	
--	----------------------------------	--	---	--





[www.benning.de](http://www.benning.de)

### Testing, measuring and safety instruments The whole range of testers from one supplier


Developing safe and practical testing and measuring instruments which comply with the relevant standards is an integral part of BENNING's product philosophy for more than 60 years now. Today, BENNING offers a comprehensive product range of high-quality testing, measuring and safety devices the quality requirements of which are orientated according to the demands of professional users. With the generation of *DUSPOL*® voltage testers and with the measuring and safety devices, BENNING sets pioneer standards worldwide concerning safety, functionality and design.

Further fields of activity of the BENNING company are the manufacturing of traction chargers for battery-driven vehicles, power supply systems for industry, medical engineering, IT and telecommunications as well as repair and maintenance of electrical machines.

First-class quality and high reliability have given a good reputation worldwide to BENNING products. These factors as well as the committed and fair cooperation of all BENNING employees are the principles of the company's success.



Factory II  
Robert-Bosch-Straße 20  
D-46397 Bocholt

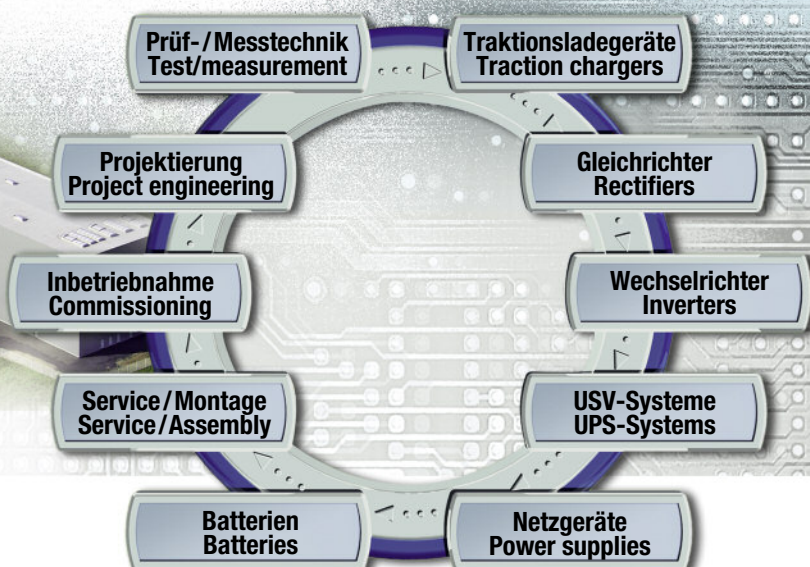


### Quality Standard ISO 9001 and ISO 14001

BENNING is certified in accordance with ISO 9001, which means continuing quality in every field, i.e. design, development, production, assembly and service. A clear sign of a company philosophy which gives first priority to quality.

Since 1996 the company BENNING has been certified to DIN ISO 14001.

It is BENNING's objective to increase energy efficiency and to reduce weight and size. Decreasing resource use is one important demand for all new developments.



Your distributor:

# BENNING

BENNING Elektrotechnik und Elektronik GmbH & Co.KG  
Münsterstraße 135-137 • D-46397 Bocholt  
Tel.: + 49 / (0) 2871 / 93-420 • Fax: + 49 / (0) 2871 / 93-429  
[www.benning.de](http://www.benning.de) • E-Mail: [duspol@benning.de](mailto:duspol@benning.de)