


Sauna heater Bi-O Germanius

Free standing heater with vaporiser


For hotel and commercial sauna

Service friendly unit assembly system.
Optimised ratio of radiated heat and convection due to the appropriate amount of stones.


9 kW

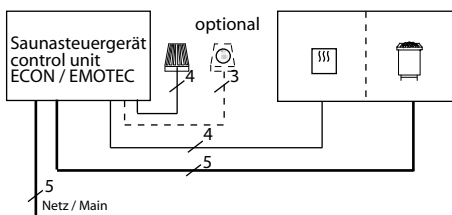

12 - 15 kW

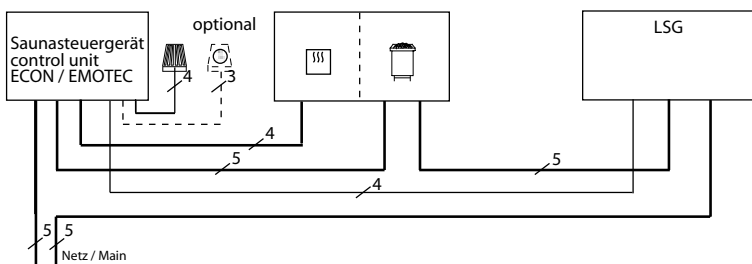

18 kW

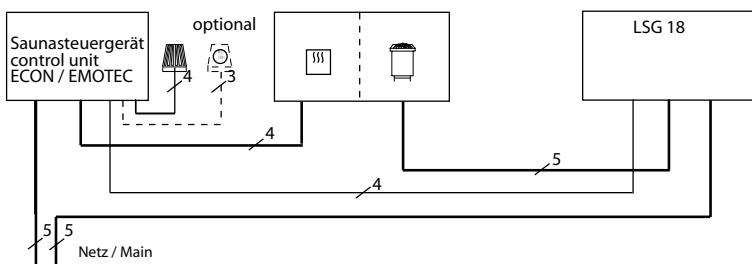

Capacity acc. DIN	Vaporiser	Electrical. Connection	Fuse control unit in A	Fuse LSG in A	Connecting cable main - control unit in mm ²	Connecting cable main - LSG in mm ²	Connecting cable control unit - heater in mm ²	Connecting cable LSG - heater in mm ²	Connecting cable control unit - LSG in mm ²
9 kW	2 kW	3N AC 50 Hz 400 V	3 x 16		5 x 2,5	5 x 2,5	5 x 1,5 4 x 1,5	5 x 1,5	4 x 1,5
12 kW									
15 kW									
18 kW				3 x 35					

All cross sections of a line are minimum diameters in mm² (Copper line)


Art.-No.	Outer shell	Capacity acc. DIN	Vaporiser	Installation dimensions H/W/D cm	For cabin size	Minimum dimensions of air intake and exhaust vents	Weight without stones without package	Stone filling	Power switch gear (LSG) needed	For operation with control units
94.3926	anthracite pearl effect vision panel in the lower part	9 kW	2 kW	90 x 63 x 50	10 - 14 m ³	35 x 6 cm *)	ca. 51 kg	60 kg	no	ECON H2 EMOTEC HCS 9003 EMOTEC HCS 9003 DB/DL
94.3927		12 kW			14 - 18 m ³	35 x 7 cm *)			ECON L09 MOTEC L09	
94.3928		15 kW			18 - 25 m ³	35 x 9 cm *)			LSG 18	
94.3929		18 kW			24 - 30 m ³	35 x 11 cm *)				

* or in accordance with the instructions of the cabin manufacturer




MADE IN GERMANY

Installation dimensions for type 9 to 15 kW



Installation dimensions for type 18 kW



Subject to technical modifications