

Special features


- Low-speed angle grinder/polisher with stepless speed adjustment
- Digital electronics for constant rotational speed
- Overload protection
- Restart protection in case of power failure
- Smooth start-up for protection of people, tools and drive
- Spindle lock pin
- Drive spindle with two keyways for increased power transmission on drum tools
- M14 drive spindle for mounting drum tools with female thread

Accessories included:

3 m power cable, 1 key, quick mounting screw, hand guard, lateral handle and demountable drive spindle

UWER 15/40 A-SI D19

Rotational speed: 4,000 RPM / Output: 1,530 watts

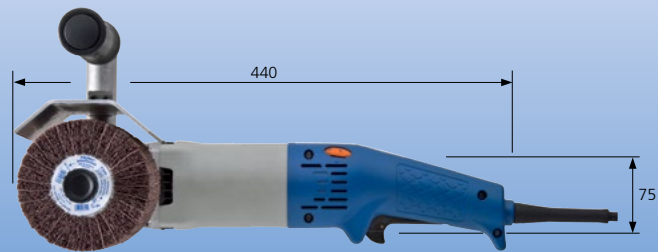

Description	EAN 4007220	Rotational speed [RPM]	Voltage [volts] 50–60 Hz	Power consumption [watts]	Power output [watts]	Max. tool dia. [mm]	Tool mounting dia. x width [mm]	Net weight [kg]
UWER 15/40 A-SI D19 230 V	896792	1,000–4,000	230	1,530	1,050	125	19 x 100	3.000

Keys

Description	EAN 4007220
EM SW 17 mm	204542



Roller set
FR-W 100100 UWER
15/40 230 V
For further information
and ordering data on roller
set, please refer to
Catalogue 204.

Suitable PFERD tools

Catalogue 204	Catalogue 208
Flap drums Poliflex® texturing rollers POLINOX® grinding drums Dia. 100 x 100 mm	Wheel brushes crimped WBU dia. 100 mm arbor hole 19.1 mm

Note: Please observe the recommended cutting speeds and the max. permitted rotational speeds in Catalogues 202–208.

