
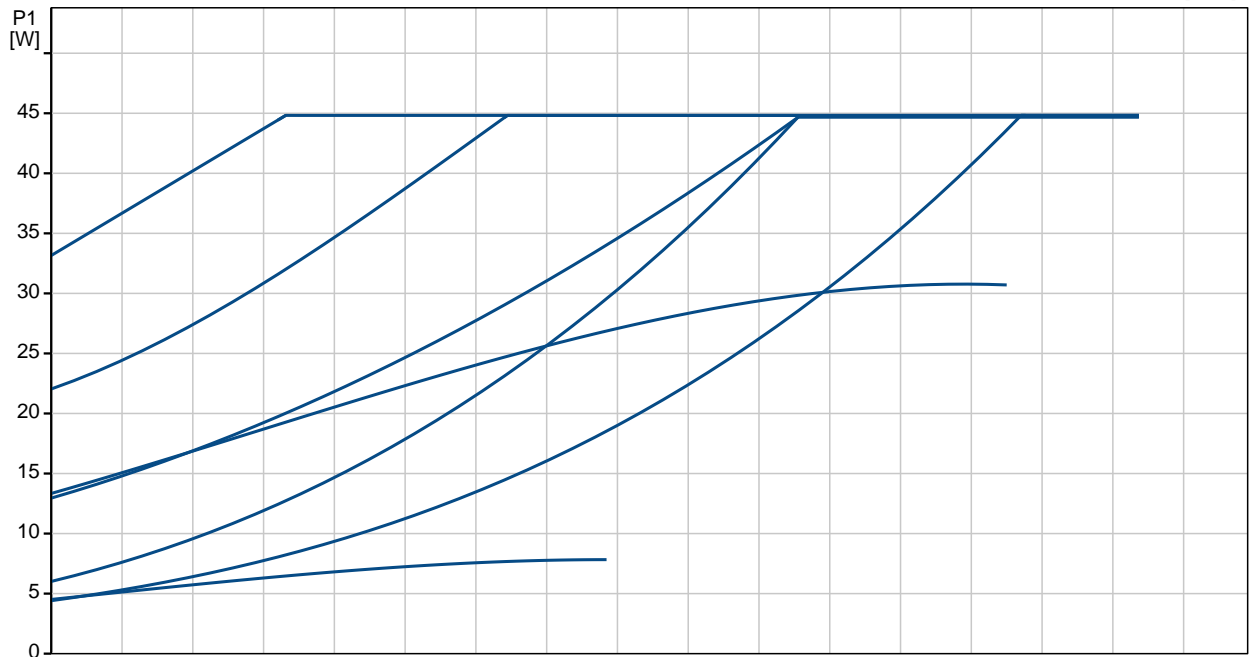
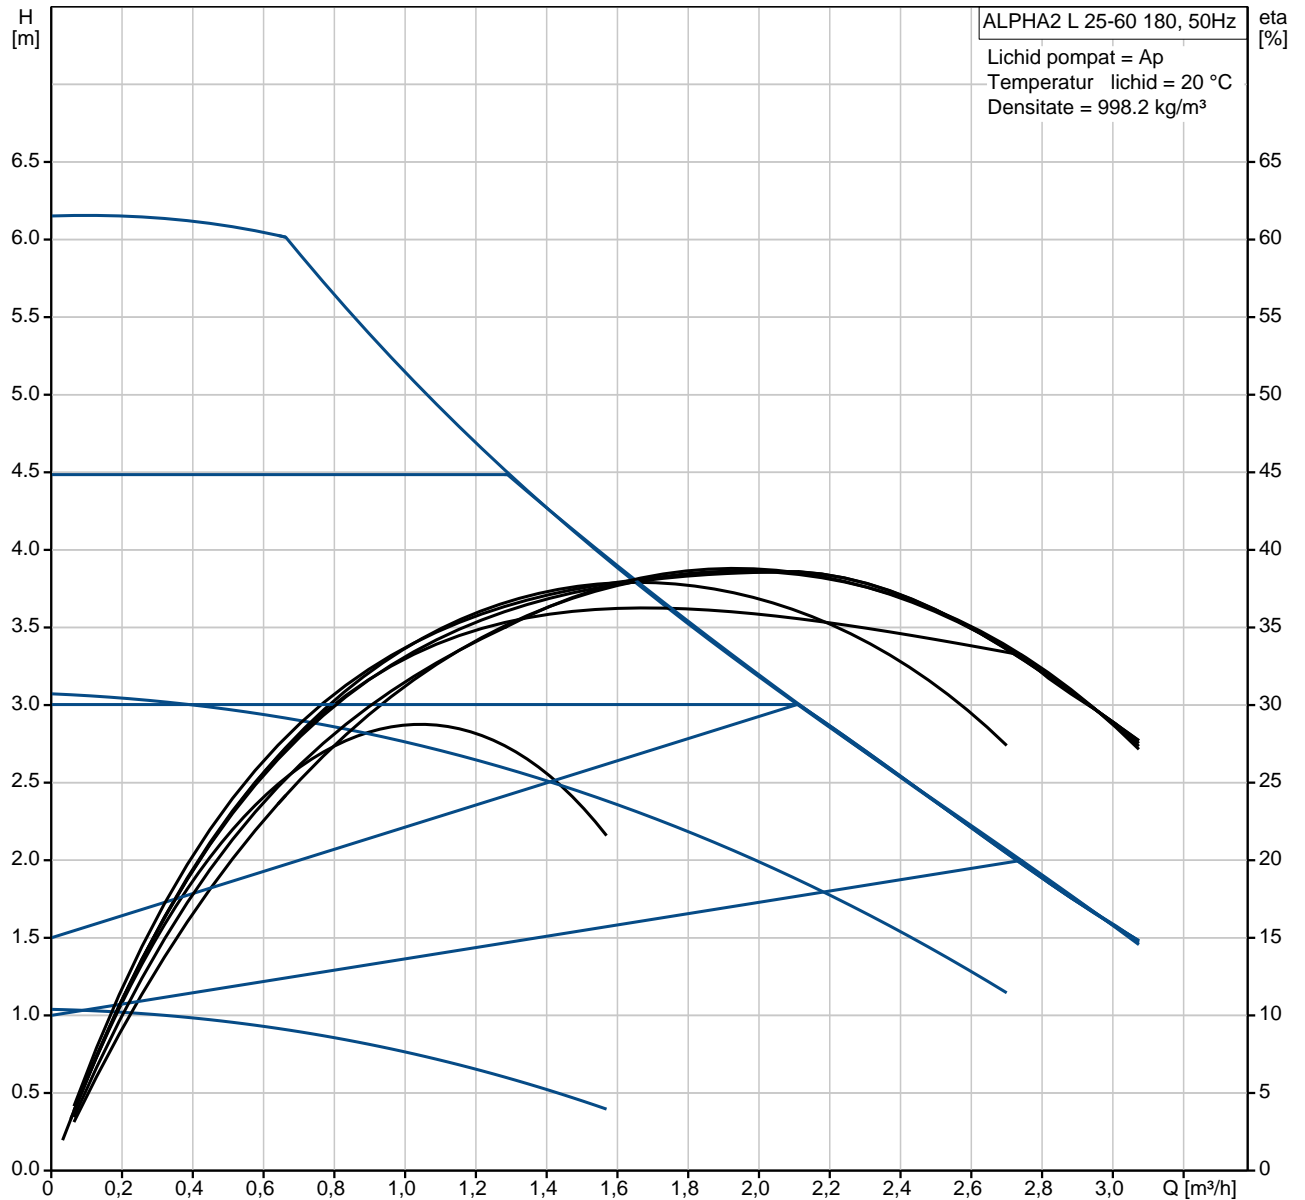


Pozi ie	Cant.	Descriere
	1	<p>ALPHA2 L 25-60 180</p>  <p style="text-align: center;">Not ! Poza de produs poate diferi de produsul actual</p> <p>Nr. Produs: 95047564</p> <p>GRUNDFOS ALPHA2 L The next generation of A-labelled small circulators</p> <p>ALPHA2 L is the latest member of the Grundfos family of high-quality circulators.</p> <p>With ALPHA2 L, you can stop worrying about complicated pump settings.</p> <p>ALPHA2 L is flexible, reliable, and more compact than any other A-labelled circulator pump on the market.</p> <p>Compact design The innovative design makes ALPHA2 L the most compact Grundfos circulator available. With the electronics integrated in the pump housing, installation in very confined spaces is now possible.</p> <p>A-label The frequency converter, permanent-magnet technology, and compact stator place ALPHA2 L highest on the energy label scheme. ALPHA2 L will use up to 80 % less electrical energy than D-labelled circulators.</p> <p>ALPHA plug The much appreciated and very popular ALPHA plug is the only plug in the market that offers extremely simple cable connection.</p> <p>One-touch operation Intuitive one-touch operation enables simple setting.</p> <p>Liquid: Lichide pompate: Ap Gama temperaturii lichidului: 2 .. 110 °C Temp. lichid: 20 °C Densitate: 998.2 kg/m³</p> <p>Technical: Clasa TF: 110 Aprob ri pe etichet : VDE,GS,CE</p> <p>Materials: Corpul pompei (stator): Font EN-JL 1020 ASTM A48-25 B Rotor: Compozit, PP</p> <p>Instala ie: Gama temperaturii ambientale: 0 .. 40 °C</p>

Pozi ie	Cant.	Descriere
		<p>Presiune de func ionare maxim : 10 bar Racordarea pompei la instala ie: G 1 1/2 Presiune maxim de func ionare: PN 10 Distan a dintre porturi: 180 mm</p> <p>Electrical data:</p> <p>Power input - P1: 5 .. 45 W Curent consumat maxim: 0.05 .. 0.38 A Frecven a re elei electrice: 50 Hz Tensiune nominal : 1 x 230 V Grad de protec ie (IEC 34-5): IP42 Clas de izolare (IEC 85): F</p>

95047564 ALPHA2 L 25-60 180 50 Hz



Descriere**Valori tipuri**

Nume produs: ALPHA2 L 25-60 180
 Nr. produs: 95047564
 Num. rul EAN: 5700311668597

Technical:

În lîime de pompare max.: 60 dm
 Clasa TF: 110
 Aprob. ri pe etichet.: VDE,GS,CE

Materials:

Corpul pompei (stator): Font
 EN-JL 1020
 ASTM A48-25 B
 Rotor: Compozit, PP

Instala ie:

Gama temperaturii ambientale: 0 .. 40 °C
 Presiune de func ionare maxim.: 10 bar
 Racordarea pompei la instala ie: G 1 1/2
 Presiune maxim. de func ionare: PN 10
 Distan a dintre porturi: 180 mm

Liquid:

Lichide pompate: Ap
 Gama temperaturii lichidului: 2 .. 110 °C
 Temp. lichid: 20 °C
 Densitate: 998.2 kg/m³

Electrical data:





Power input - P1: 5 .. 45 W
 Curent consumat maxim: 0.05 .. 0.38 A
 Frecven a re elei electrice: 50 Hz
 Tensiune nominal.: 1 x 230 V
 Grad de protec ie (IEC 34-5): IP42
 Clas. de izolare (IEC 85): F
 Tip protec ie motor încorporat.: F r
 Protec ie termic.: ELEC

Controls:


Pozi ia cutiei de conexiuni: 6H

Others:

Energy (EEL): 0.23
 Greutate net.: 2.1 kg
 Greutate brut.: 2.3 kg

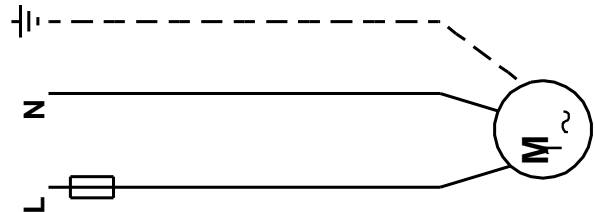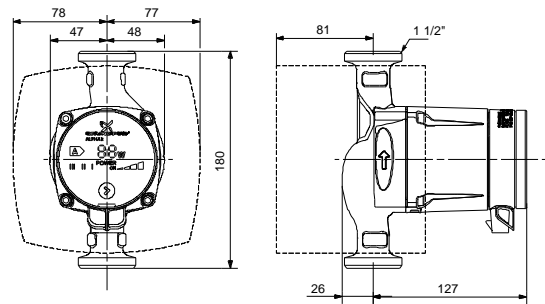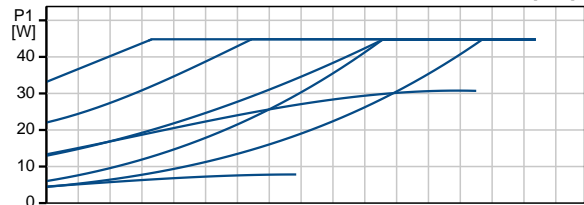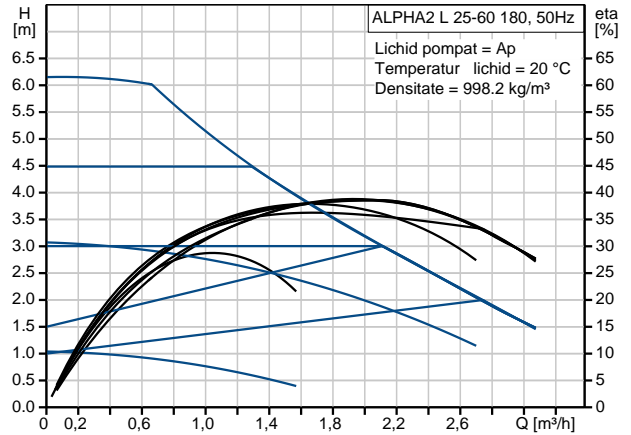


95047564 ALPHA2 L 25-60 180 50 Hz

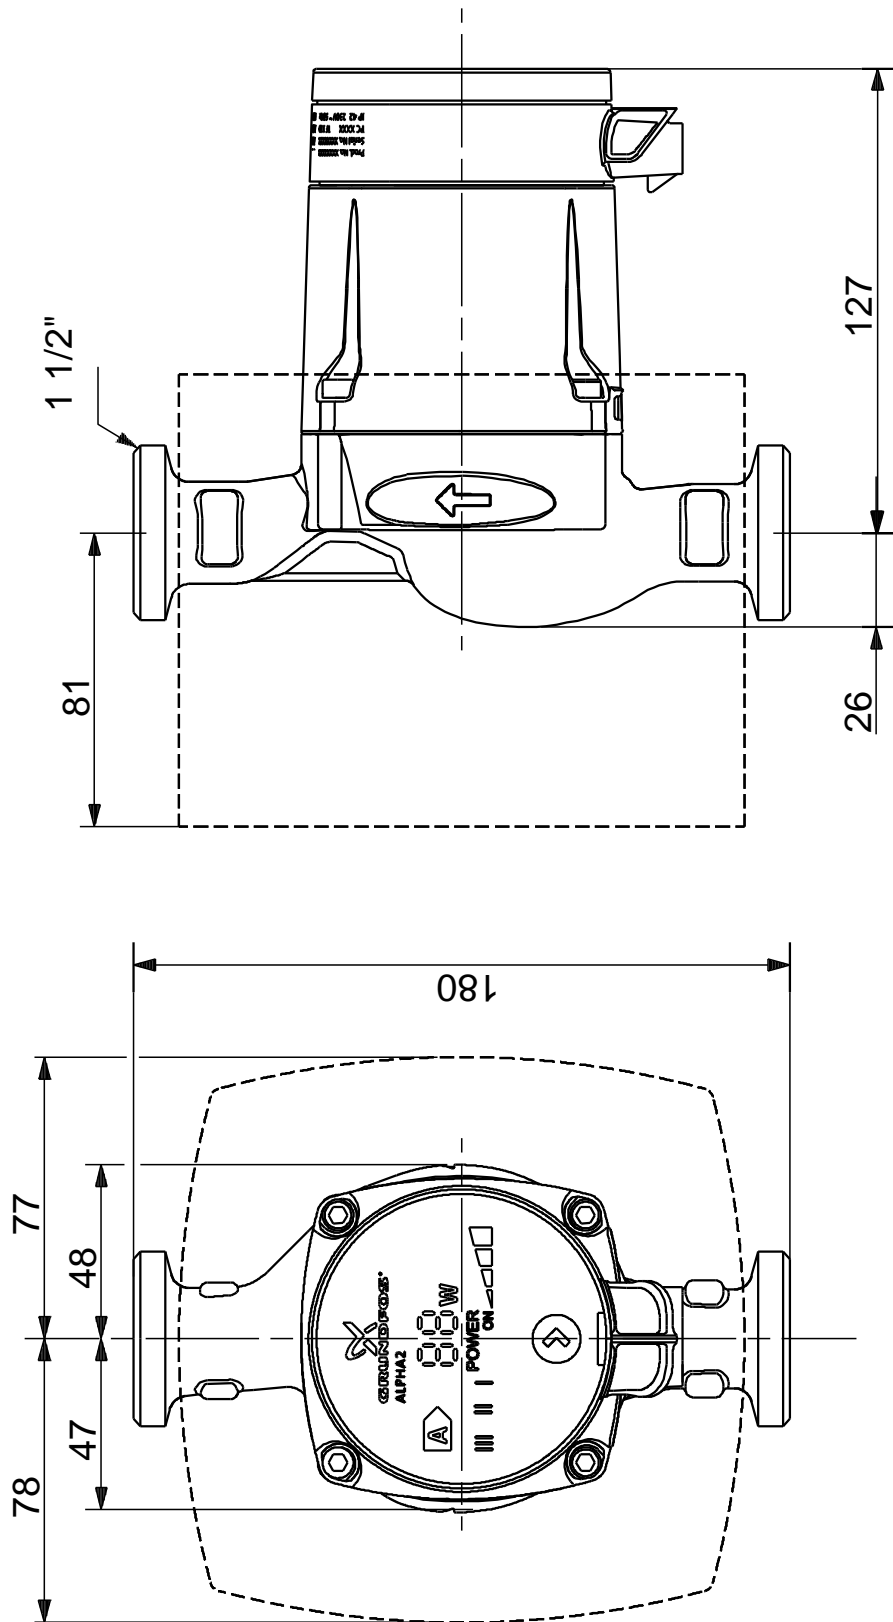

Note! All units are in [mm] unless others are stated.
 Disclaimer: This simplified dimensional drawing does not show all details.

95047564 ALPHA2 L 25-60 180 50 Hz

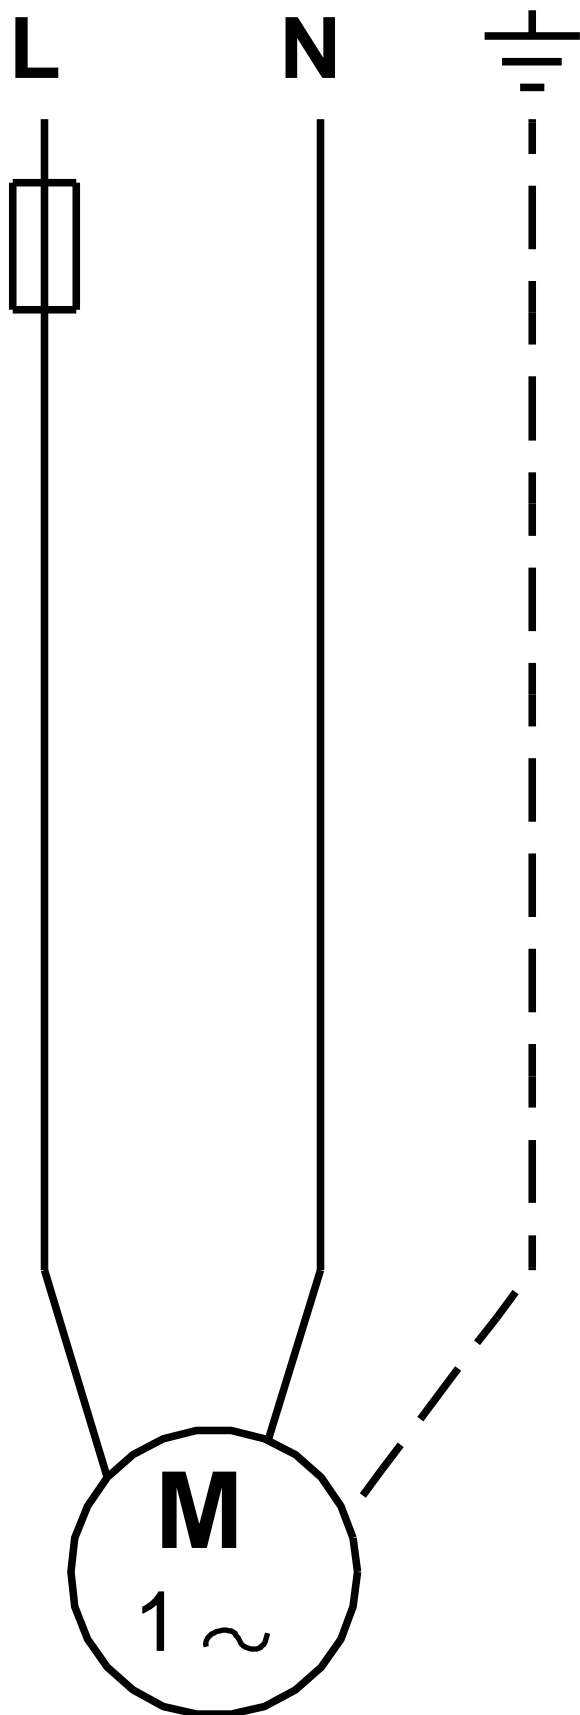

Not ! Toate unit ile sunt în [mm] dac nu altele sunt condi iile.