
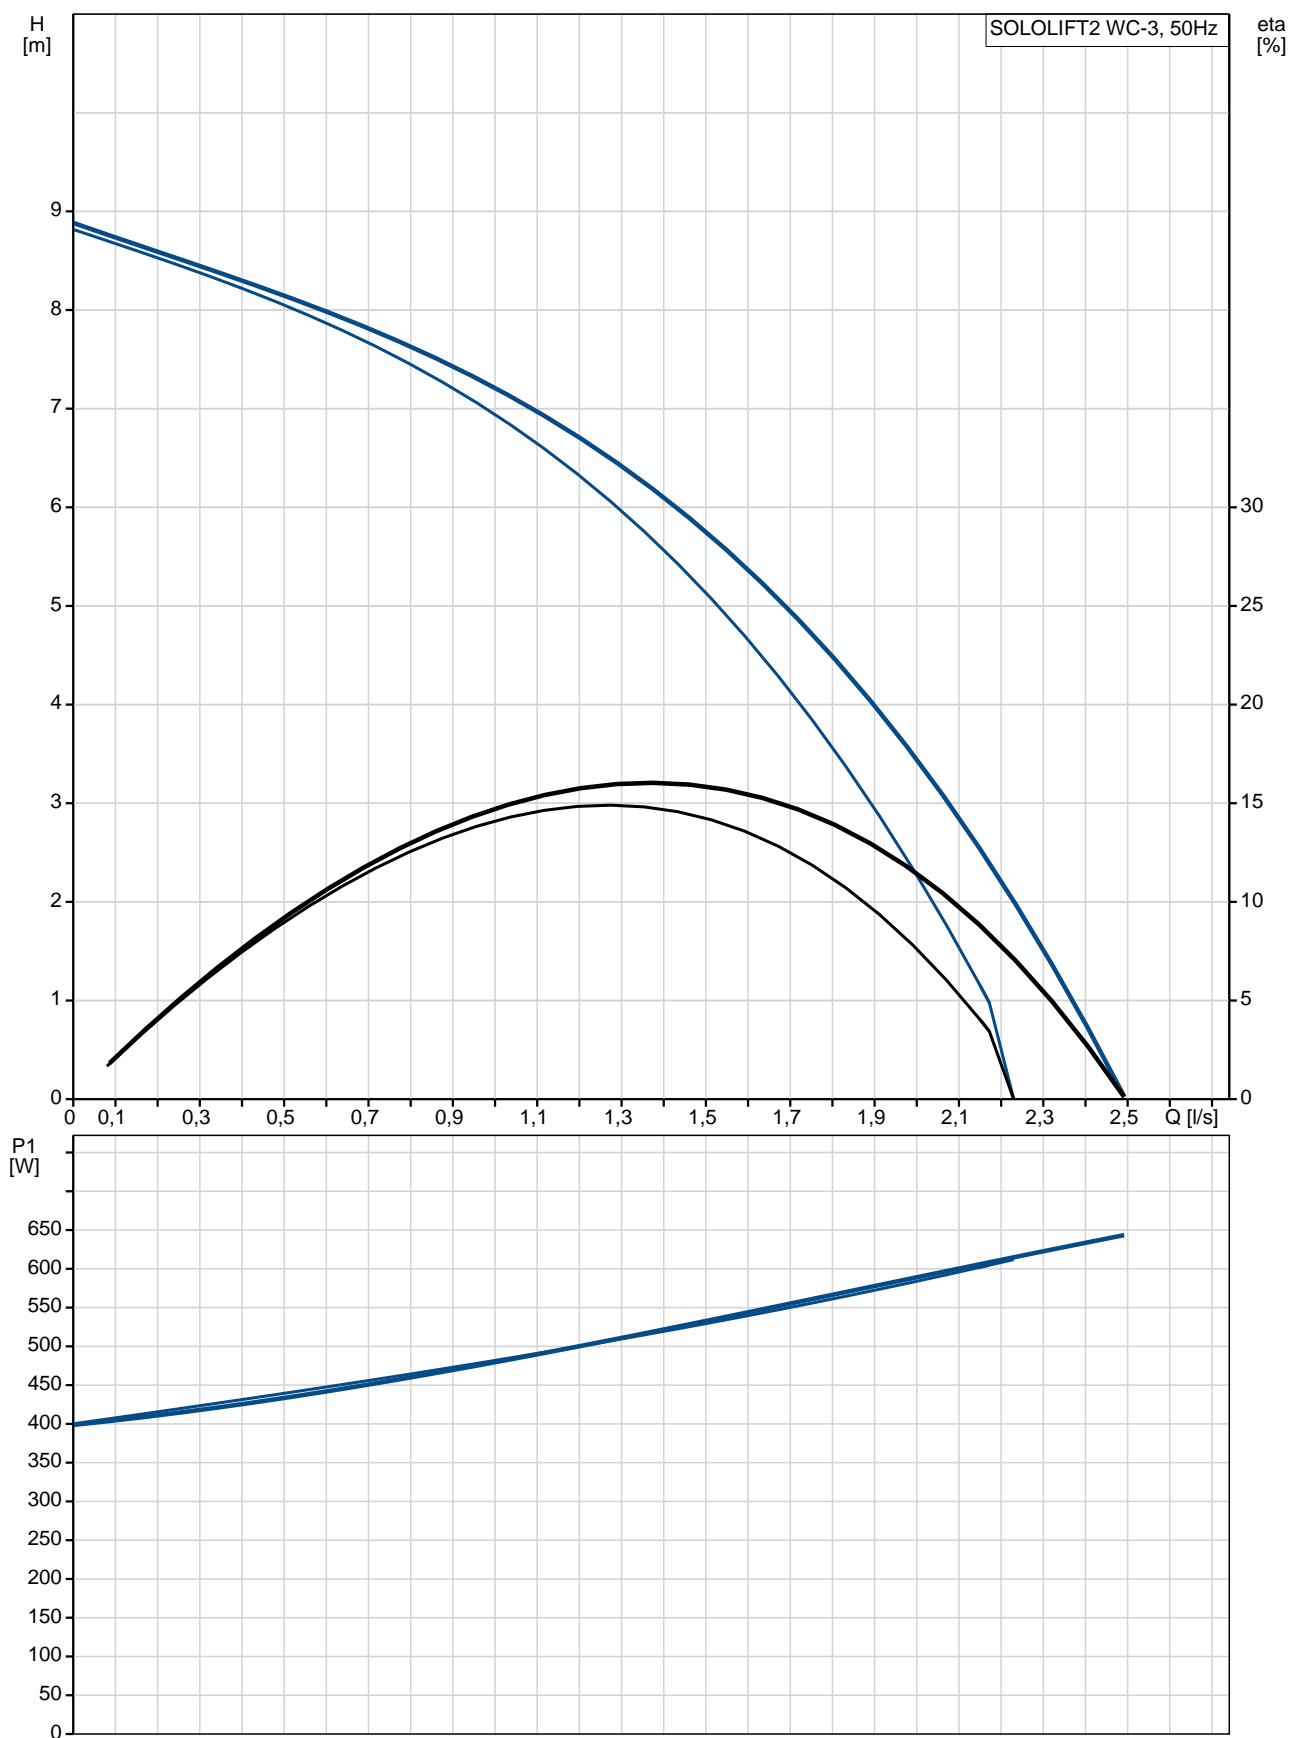





Pozi ie	Cant.	Descriere
	1	<p>SOLOLIFT2 WC-3</p>  <p>Not ! Poza de produs poate diferi de produsul actual</p> <p>Nr. Produs: La cerere</p> <p>Sololift2 WC-3 is a small, compact automatic lifting station suitable for pumping of wastewater off places in private dwellings where wastewater cannot be led directly to the sewer by means of a natural downward slope.</p> <p>Sololift2 WC-3 is suitable for pumping wastewater from a toilet containing toilet paper and faeces with additional connections on the lid and to the sides of the tank for e.g. washbasin, shower or bidet.</p> <p>The pumping of liquids containing other material may cause faults and limit the scope of guarantee.</p> <p>Sololift2 WC-3 is typically used to dewater:</p> <ul style="list-style-type: none"> • toilet, washbasin, shower and bidet in basements below sewer level, <p>in connection with the renovation or modernisation of existing buildings, where the location may be remote from the main soil pipe so that a natural slope cannot be established.</p> <p>Extremely low switching levels for lowest construction heights, advantageously in case of connection of a shower receptor.</p> <p>The compact lifting station is equipped with</p> <ul style="list-style-type: none"> - Cable with or without plug (see technical data) - Horizontal or vertical fastening possibility of discharge hose connector with several adaptors for pipes with Ø22-40mm <p>-Integrated non return valve</p> <ul style="list-style-type: none"> - Dry and high performance motor unit incl. thermal protection, pressure switch and controller - DN100 toilet connection hose - Two flexible connectors for inlet (adjustable in height) of pipes Ø36 or 40 - Slot for an alarm board with buzzer (accessory) - Manual anti clogging function and separate drain connection for service - Venting valve with overflow protection - Uplift fixation clips <p>Design according to EN12050-3 and production inspection by external institute with unique features focused on quick installation, long lasting operation and easy clean service.</p> <p>Note: The discharge adaptor can be mounted vertical or horizontal. Vertical installation increase the flow (s. databooklet and curves)</p> <p>Liquid:</p> <p>Temperatura maxim a lichidului: 50 °C</p> <p>Densitate: 998.2 kg/m³</p> <p>Technical:</p> <p>Aprob ri pe etichet : CE,TR,LGA,VDEEMV,VDE</p> <p>Toleran a curbilor: ISO9906:2012 3B</p>

Pozi ie	Cant.	Descriere
		<p>Materials:</p> <p>Rezervor: PLASTIC</p> <p>Instala ie:</p> <p>Aspira ie pomp : 32/36/40, 36/40/50, DN 100</p> <p>Refulare pomp : 22/25/28/32/36/40</p> <p>Num r de conductori: 3X0,75MM2</p> <p>Electrical data:</p> <p>Puterea de intrare - P1: 620 W</p> <p>Frecven a re elei electrice: 50 Hz</p> <p>Tensiune nominal : 1 x 220-240 V</p> <p>Curent nominal: 3 A</p> <p>Cos fi - factor de putere: 0,92</p> <p>Tura ie nominal : 2800 rpm</p> <p>Grad de protec ie (IEC 34-5): IP44</p> <p>Clas de izolare (IEC 85): F</p> <p>Lungimea cablului: 1.2 m</p> <p>Tip cablu: H05VV-F</p> <p>Tip de conectare cablu: SCHUKO</p> <p>Others:</p> <p>Greutate net : 7.3 kg</p> <p>Greutate brut : 10 kg</p>




La cerere SOLOLIFT2 WC-3 50 Hz



Descriere	Valori i tipuri
Informa ii generale:	
Nume produs::	SOLOLIFT2 WC-3
Nr. produs::	La cerere
Numărul EAN::	La cerere
Pre :	La cerere
Technical:	
În l ime de pompare max.:	8.5 m
Aprob ri pe etichet :	CE,TR,LGA,VDEEMV,VDE
Toleran a curbelor:	ISO9906:2012 3B
Materials:	
Rezervor:	PLASTIC
Instala ie:	
Aspira ie pomp :	32/36/40, 36/40/50, DN 100
Refulare pomp :	22/25/28/32/36/40
Num r de conductori:	3X0,75MM2
Liquid:	
Temperatura maxim a lichidului:	50 °C
Densitate:	998.2 kg/m³
Electrical data:	
Puterea de intarare - P1:	620 W
Frecven a re elei electrice:	50 Hz
Tensiune nominal :	1 x 220-240 V
Curent nominal:	3 A
Cos fi - factor de putere:	0,92
Tura ie nominal :	2800 rpm
Grad de protec ie (IEC 34-5):	IP44
Clas de izolare (IEC 85):	F
Protec ie termic :	THERMIK S06-150-05
Lungimea cablului:	1.2 m
Tip cablu:	H05VV-F
Tip de conectare cablu:	SCHUKO
Others:	
Greutate net :	7.3 kg
Greutate brut :	10 kg
Gam produs:	Interna ional

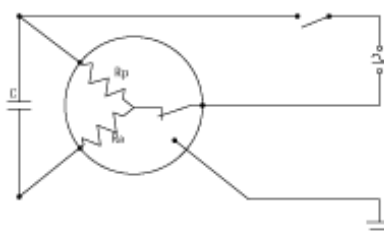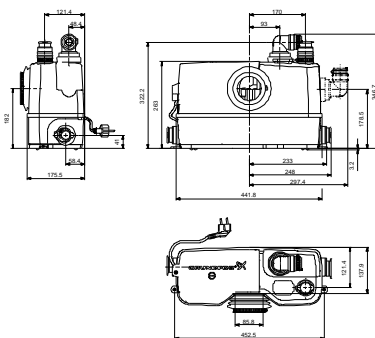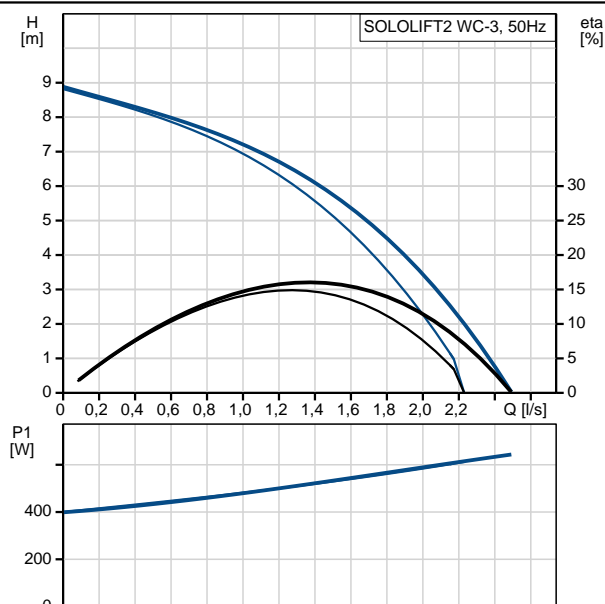


La cerere SOLOLIFT2 WC-3 50 Hz

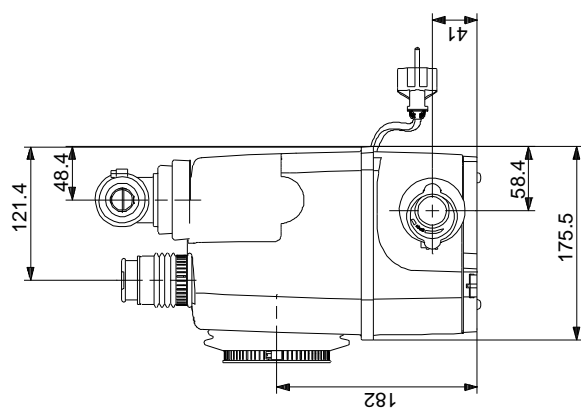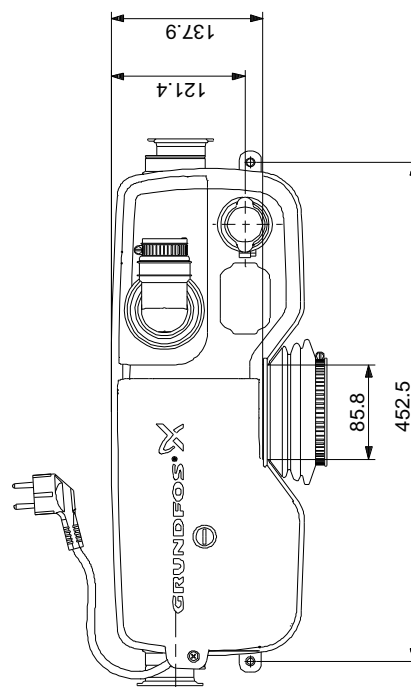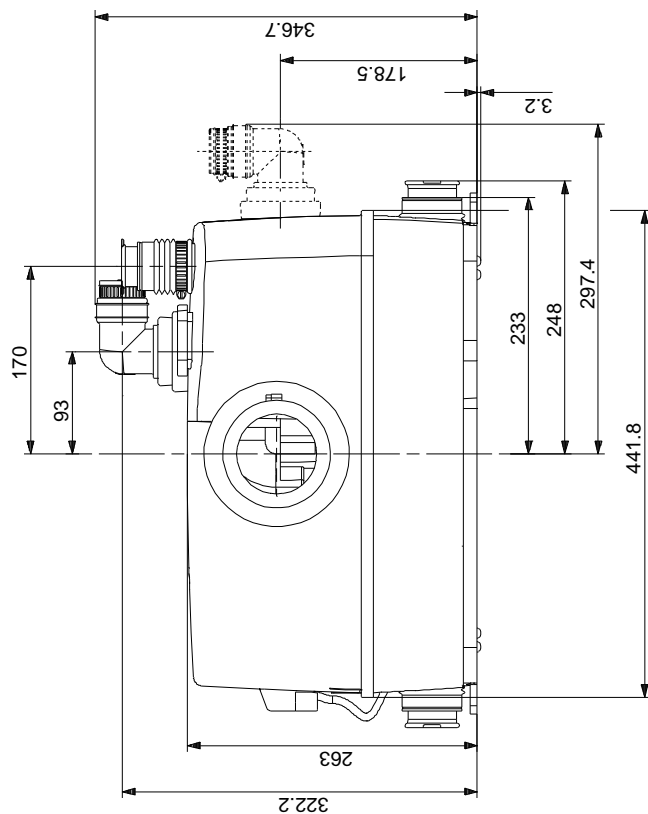

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

La cerere SOLOLIFT2 WC-3 50 Hz

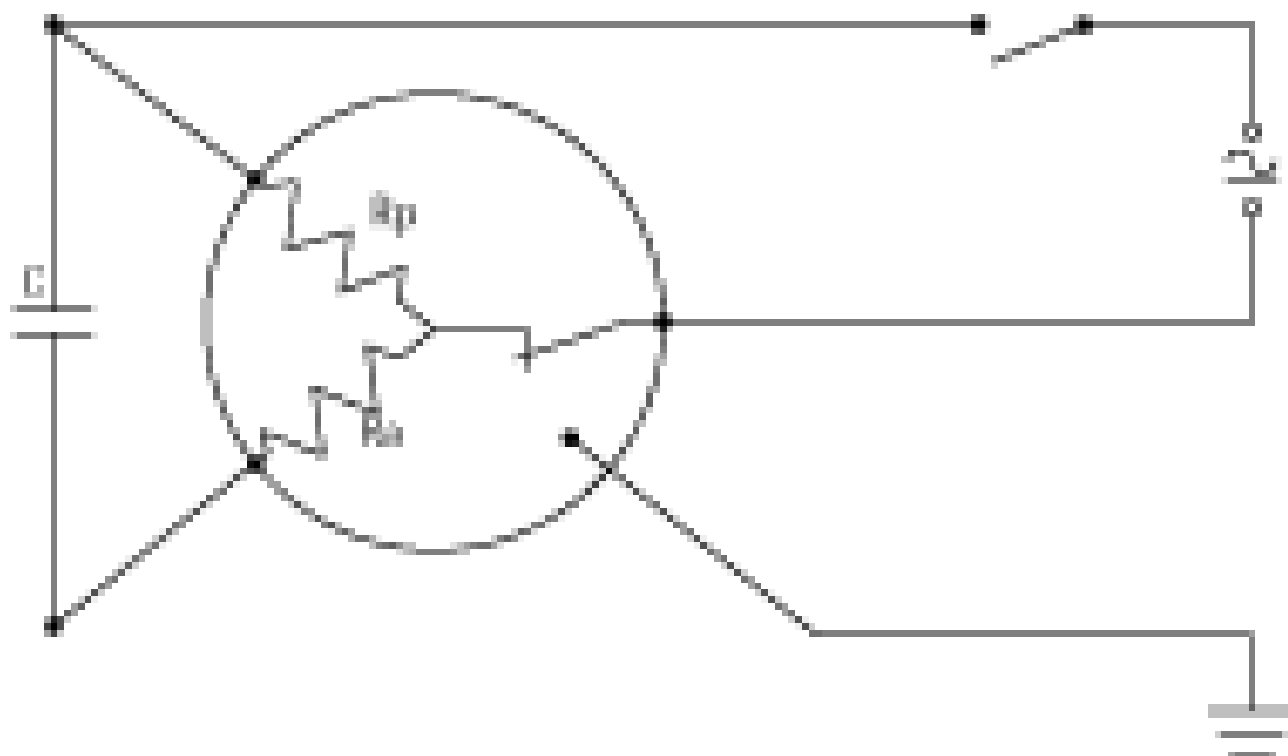

Not ! Toate unit ile sunt în [mm] dac nu altele sunt condi iile.