



## *Slope regulator*

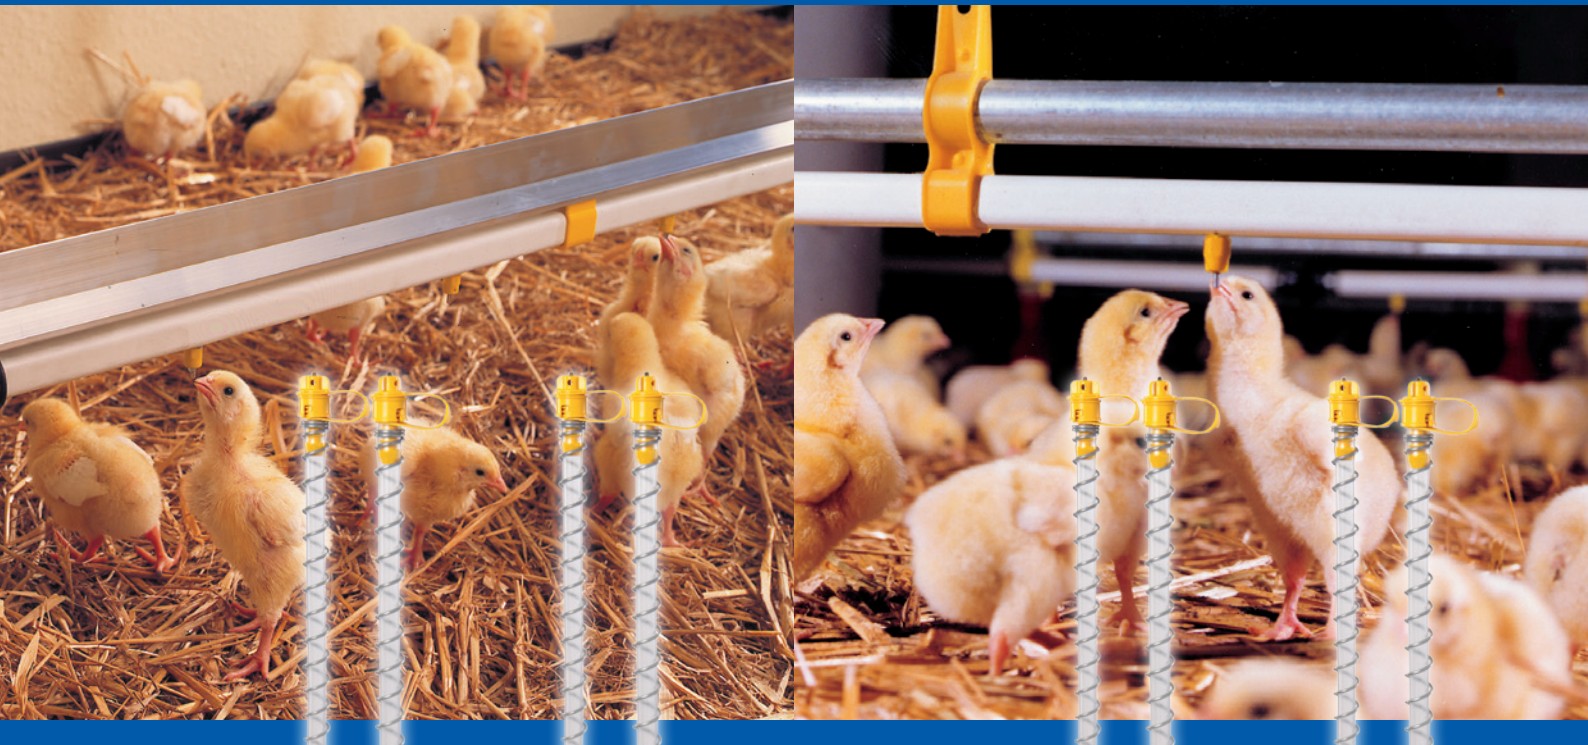

# Main facts at a glance: The LUBING Slope regulator

## The advantages of the LUBING Slope regulator:

- The valve of the slope regulator will remain open until the pressure in the drinking line has reached the predetermined level. If this level is reached, the valve closes automatically and keeps the water column consistently and safely at the desired level.
- The adjustable slope regulator compensates variable a height difference of 10-45 cm.

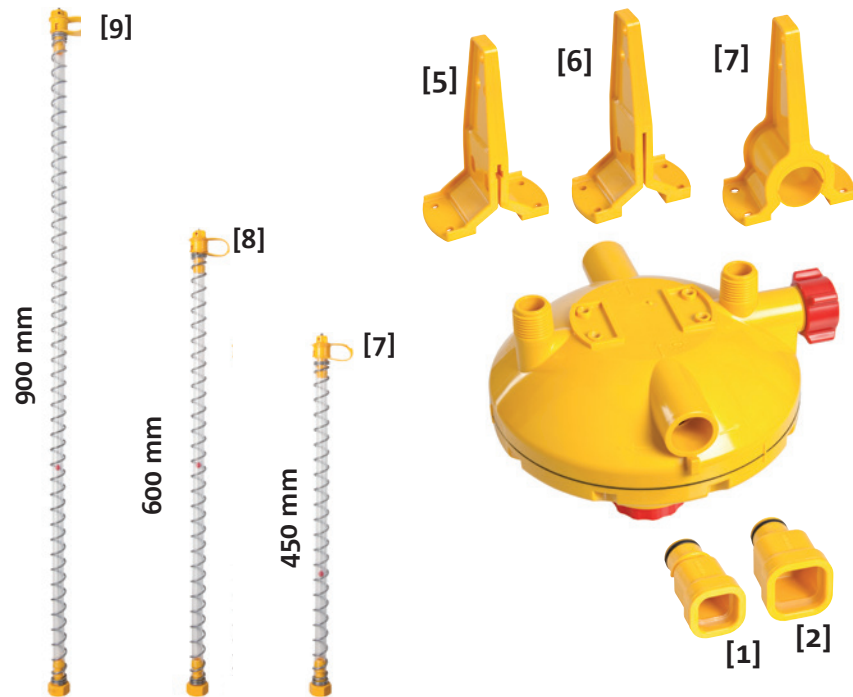

LUBING Slope regulator Art.	Transition piece from the slope regulator to					
	[1] 22 mm Square pipe Art. Nr. 3303-00			[2] 28 mm Square pipe Art. Nr. 3304-00		
	Breather unit					
Hanger	[7] 450 mm	[8] 600 mm	[9] 900 mm	[7] 450 mm	[8] 600 mm	[9] 900 mm
[5] Aluminium Profile	3242-00	3242-6-00	3242-9-00			
[6] Turkey Profile				3243-00	3243-6-00	3243-9-00
[7] Conduit support Ø25,4 and 26,7 mm	3244-00	3244-6-00	3244-9-00	3245-00	3245-6-00	3245-9-00

Max. 3 slope regulators in one drinking line.

For further information: [www.lubing.com](http://www.lubing.com)

Technical modifications reserved.



**LUBING Maschinenfabrik GmbH & Co. KG**

Lubingstraße 6 · 49406 Barnstorf (Germany)  
Tel.: +49 (0) 54 42 - 98 79-0 · Fax: +49 (0) 54 42 - 98 79-33  
[www.lubing.com](http://www.lubing.com) · [info@lubing.com](mailto:info@lubing.com)

**Drinking-Systems  
Conveyor-Systems  
Climate-Systems**