


## WEFL

### "WEFL": WALL-E FLOOR SERIES FLOOR SCALES

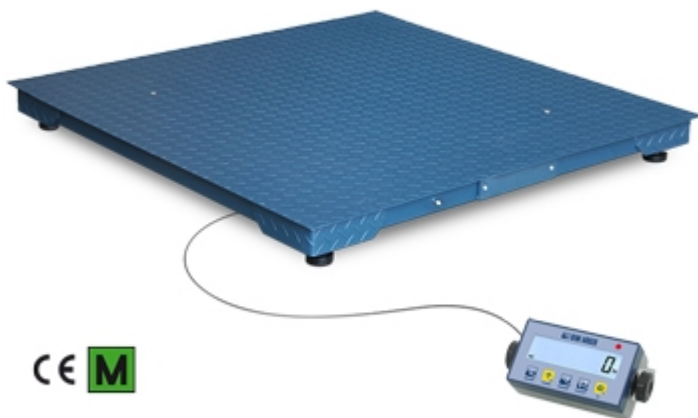

CE 

Floor scales characterized by a multifunction, compact weight indicator and a sturdy, monobloc, steel platform. Particularly suitable for industrial and commercial use, guaranteeing precision and reliability. Available also in CE-M approved version according to OIML R-76 / EN 45501 standards.

**The best solution  
for advanced industrial  
applications**

## TECHNICAL FEATURES

- Weight indicator with ABS case, 25mm backlit LCD display with 6 high contrast digits and icons for showing the active functions. 5-key functional waterproof keypad.
- Fitted with fixing bracket with adjustable inclination.
- Functioning with 4 steel load cells, approved according to OIML R60 C3 standards, IP67 protection degree.
- Monobloc structure with oven-fire painted steel tubular, adjustable resting feet, and level.
- Protection reinforcements close to the load cells.
- Fixed load surface in chequered steel, size: see the table.
- Digital calibration and Set-Up from keypad or from PC through DINITOOLS.
- Cable 3m long for the connection between platform and indicator.
- Supplied as standard with 4 AA batteries extractable drawer (batteries not included), and 12V external power adapter (if connected it excludes the battery supply).
- Fitted with high resolution calibration for internal use, with 0.03% accuracy of the maximum capacity (activated as standard and disabled by menu).

## SELECTABLE FUNCTIONS

- The user can select the operating modes directly using the dedicated key\*:
  - High resolution display x 10
  - Precision weighing with temporary recalibration via a sample weight (for internal factory use)
  - Net/Gross
  - Lb to Kg converter
  - Free conversion factor (for meter and litre counters etc.)
  - Weight totalizer
  - Formulizer
  - +/- controller with quick target and threshold input
  - Percentage weighing
  - Piece counter
  - Hold

The "alibi memory" function is available in combination with the required operating mode and it is activated automatically when installing the relevant optional board.

- Optional functions:
  - PEAK, detection of weight peaks (code DFWPK)
  - Newton to Kg converter (code DFWPK)
- Access to the user menu is gained using the dedicated key\* to adjust the weighing filter, date and time, setpoint and tare weight, which the user can access by entering a programmable access password.


*\* These quick access keys to the menus can be blocked by configuring a dedicated password.*

## DETAIL 1



Compact multifunction weight indicator, complete with fixing bracket and backlit display.

## DETAIL 2

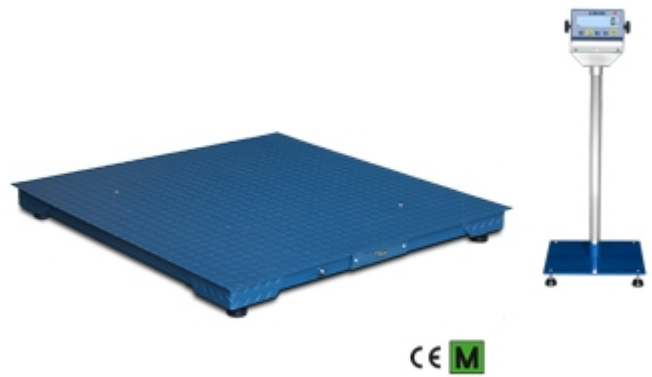

Application with optional column.

## VERSIONS

### Available versions

Codice	l x w x h (mm)	N° celle	Max (kg)	d (kg)	<b>M</b> 2R (kg)*
WEFLB1500-1	1250x1250x120	4x1000kg	600/1500	0,2/0,5	0,2/0,5
WEFLD3000-1	1250x1500x120	4x2000kg	1500/3000	0,5/1	0,5/1
WEFLE3000-1	1500x1500x120	4x2000kg	1500/3000	0,5/1	0,5/1

(\*) These divisions are obtainable only with the relative options.



“YOUR WORLDWIDE PARTNER FOR WEIGHING”

**DINI ARGEO**  
**FRANCE** sarl  
France

**DINI ARGEO**  
**GMBH**  
Germany

**DINI ARGEO**  
**UK Ltd**  
United Kingdom

**DINI ARGEO WEIGHING**  
**INSTRUMENTS Ltd**  
China

**DINI ARGEO**  
**OCEANIA**  
Australia



**COMPANY HEADQUARTERS**

Via Della Fisica, 20  
41042 Spezzano di Fiorano Modena - Italy  
Tel. +39.0536 843418

**SERVICE ASSISTANCE**

Via Dell'Elettronica, 15  
41042 Spezzano di Fiorano Modena - Italy  
Tel. +39.0536 921784



*SALES AND TECHNICAL ASSISTANCE SERVICE*