


BKS band re-saw

The flexible saw where highest accuracy is achieved

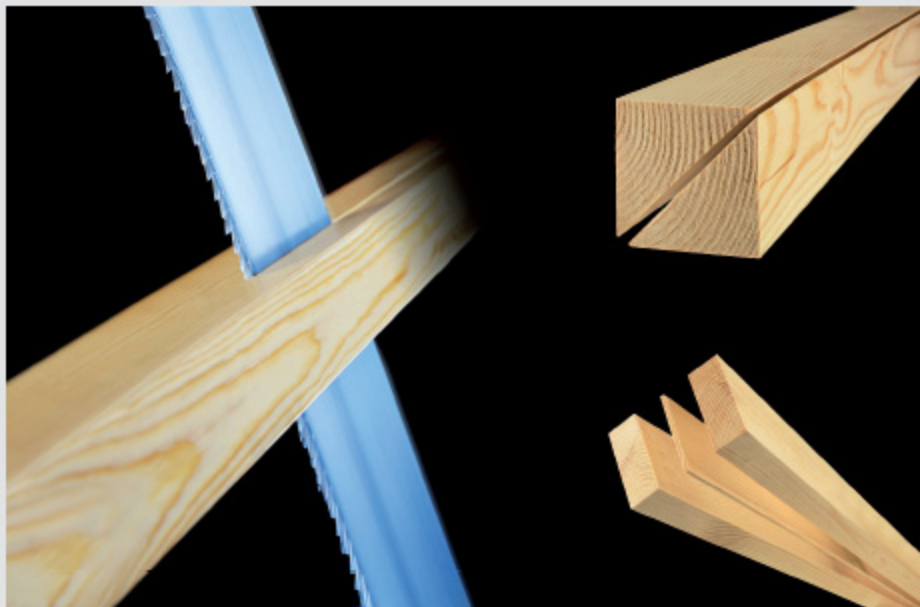

BKS – for profitable re-sawing

BKS band re-saw

- Electronic feed
- Tiltable fence side
- Hydraulic band tensioning
- Band guides
- Effective band and wheel cleaning
- Operator panel with PLC for:
 - Feed speed
 - Position of feed roller
 - Position of fence side
 - Production counter
 - Band speed (require frequency controlled band speed)
- Idle in- and out-feed rollers (for long and heavy pieces)
- Frequency controlled band speed, 30-40 m/s





Stable band re-saw for carpentry and producers of mouldings with high demand for accuracy and long life time. The BKS is equipped with frequency controlled feed speed, 5-40 m/min. A very high accuracy is obtained through the hydraulic band tensioning. Thanks to simple and fast settings high productivity is achieved.



1 Band cleaning

To achieve highest possible accuracy, wheels and band is cleaned automatically with scrapes and lubricated pads.

2 Tilttable fence side

Tilttable fence side for bevel ripping up to 45°. Specially developed for bevel siding, moulding and certain package manufacturers.

3 Operator panel

User friendly operator panel with digital presentation of feed roller and fence side position as well as adjustable feed and band speed.

4 Laser positioning

In order to effectively split random width boards, as an option, a laser beam measure each board and the saw automatically position itself after confirmation from the operator with a foot pedal.

Technical data

Feed speed	5-40 m/min
Max distance saw band – fence side	310 mm
Max distance saw band – feed roller	235 mm
Max cutting depth	370 mm
Saw wheel diameter	915 mm
Saw wheel width	90 mm
Band dimension	5845x10x1,0 mm

BKS band re-saw



WACO JONSEREDS AB
Box 283
SE-301 07 Halmstad

Telephone +46 35 17 67 00
Fax +46 35 17 67 80
E-Mail info@waco.se
Internet www.waco.se