


## Filters for High Temperature

## Sofdistri

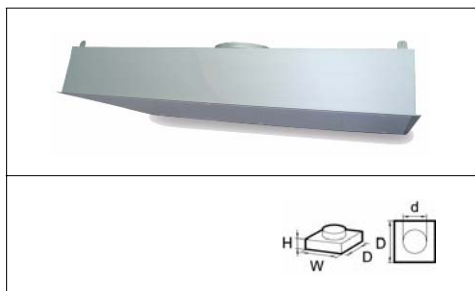

## Advantages

- Quick and easy installation of HEPA/ULPA filters
- Positive clamping mechanism
- Leak free construction
- Support points for connection to steelwork
- Light weight
- Flush mounted diffuser-easy to clean

**Applications:** Clean areas with supply and extract systems.

**Type:** Terminal housing for HEPA/ULPA filters.

**Mounting:** By integrated suspension eyes or rested in ceiling grid.

**Construction:** Anodized Aluminium frame, GI and ALU inlet cover.

**Filter type:** HEPA and ULPA.

**Filter mounting:** Quick filter change using pivoting clamps.

**Connection:** Connection from top, 305mm or 250mm collar.

**Diffuser:** GI, ALU, SS or Powder coated GI perforated sheet.

Reference	Type	Model	Exterior dimensions (WxHxD) mm	Collar size dia. mm	Unit weight kg	Unit volume m <sup>3</sup>
4102002	Sofdistri (Top entry)	TFT/5/5/1 (A1)	594 x 594 x 175	250	9.7	0.11
4102003	Sofdistri (Top entry)	TFT/11/1(A1)	1194 x 594 x 175	250	16.3	0.22

\* Other dimensions, finishes and different option are available.

Reference	Model	Filter dimension (WxHxD) mm	Filter classification EN1822:2009	Media area m <sup>2</sup>	Airflow / Pressure drop m <sup>3</sup> /h / Pa	Unit weight kg	Unit volume m <sup>3</sup>
15008782	MD13-514*514-10/22	514x514x66	H13	6.9	428/115	3.5	0.03
15042254	MD14-514*514-10/22	514x514x66	H14	6.9	428/142	3.5	0.03
15008783	MD13-1114*514-10/22	1114x514x66	H13	15	928/115	7	0.06
15042153	MD14-1114*514-10/22	1114x514x66	H14	15	928/141	7	0.06

\* Gasket at filter inlet.