

CamCleaner 30000



Advantages

- Healthier employees
- Less cleaning
- Effective in large areas, such as large ware houses and industry.
- Reduces average ambient temperature in large rooms
- Can also be used in climate chambers with heating and cooling functions
- Can be connected to duct systems and textile diffusers.
- Made of sound absorbing Isolamin material, easy to attach connections to
- Available with motors from 5.5 kW to 11 kW
- Built-in lifting device for trucks
- Supplied with wheels as standard

Applications: Very powerful air purifier controlled with constant airflow or steard by 0-10V. For large production facilities, construction sites, very dusty environments, pharmaceutical industry, food industry, printing factories, animal stables, processing plants and indoor environments with high Air quality requirements.

Power supply: 3-phase 400 V, 50 Hz

Fan: FreVent fan 5,5 kW motor as standard.

Connection: PG strips or round sleeve coupling. Can be installed in double pallet racking system.

Installation: Mobile or stationary. Wheels supplied for floor installation. Can be installed in double pallet racking system.


Weight: 130,5 kg, inkluding filters

Last update: 2012-02-15

Item number	Type	Dimensions (WxHxD) mm	Filter class according to EN1822 / EN779:2012	Weight kg	Number of filters per Air purifier
501552	CamCleaner 30000	3035x2172x1320	F7 - H13	1150	6 Pre + 3 Main

* Other filter classes available on request

Model	Power (kW)	Flow (m³/h)	Filter class	Weight (kg)	Volume (m³)
30000	5.5	10000	F7	1150	100
30000	5.5	10000	H13	1150	100
30000	5.5	10000	ULPA	1150	100

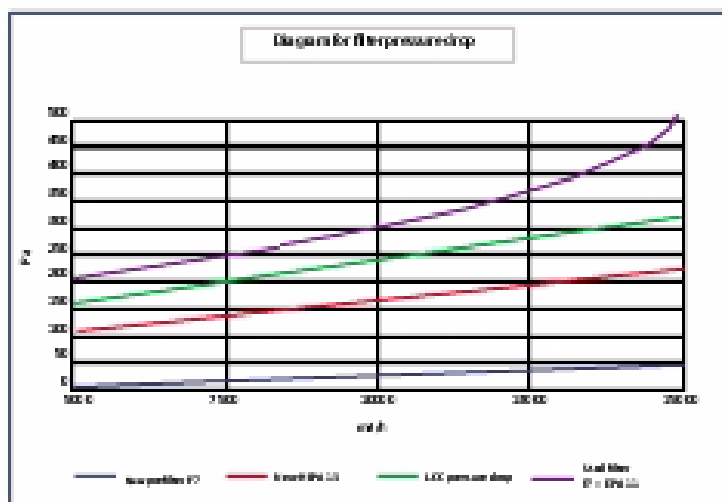

Air Cleaners Exchange

Item no.	Type	Model	Dimensions (BxHxD) mm	Number of filters per air purifier	Remarks
308333	Main filter	Micretain	MGMM (1205x565x292)	3	Standard
610165	Prefilter	Hi-Flo XLT	HFGP (592x592x640)	6	Standard
* Other filter classes available on request					