


S-Flo W U series

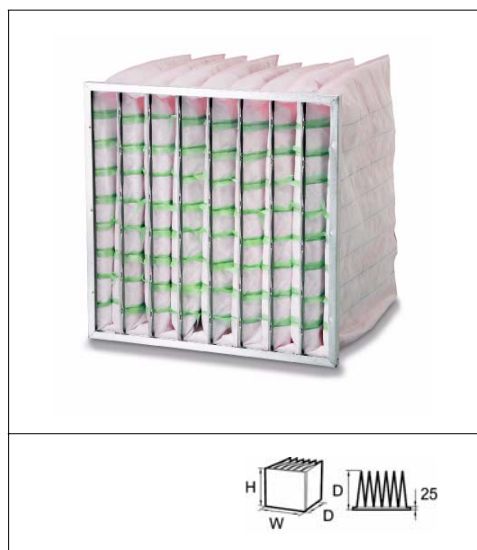

Advantages

- Multi-pocket bag filter
- Comprehensive range of standard sizes
- Robust metal header frame
- Unique pocket design
- Large surface area
- Controlled media spacing (CMS)

Application: Air conditioning applications.

Type: Extended surface multi pocket bag filter.

Case: Galvanised steel.

Media: Synthetic Fibres.

EN779:2012 efficiency: M6 (55-65%), F7 (80-85%), F8 (90-95%).

Eurovent 4/5 efficiency: EU6, EU7, EU8.

Recommended final pressure drop: 450 Pa (suggested economical change point 250 Pa).

Temperature: 70°C maximum in continuous service.

Holding frames: Front and side access housings and frames are available, Type 8, Type L, and FC Housings.



Model	Dimensions (WxHxD) mm	Filter classification EN779:2012	Air flow/pressure drop m ³ /hr/Pa	Number of pockets	Media area m ²	Unit weight kg	Unit volume m ³	Energy Rating
*UM5	592x592x600	M5	3400/46	8	6	2,8	0,05	F
*UF5/38	592x592x380	M5	2550/33	8	3,8	2,3	0,05	F
*UG5	490x592x600	M5	2800/46	6	4,6	2,4	0,05	F
*UG5/38	490x592x380	M5	2100/33	6	2,9	1,9	0,05	F
*UH5	287x592x600	M5	1700/46	4	3	1,6	0,03	F
*UH5/38	287x592x380	M5	1275/33	4	1,9	1,4	0,03	F
*UM6	592x592x600	M6	3400/50	8	6	2,8	0,05	E
*UF6/38	592x592x380	M6	2550/37	8	3,8	2,3	0,05	E
*UG6	490x592x600	M6	2800/50	6	4,6	2,4	0,05	E
*UG6/38	490x592x380	M6	2100/37	6	2,9	1,9	0,05	E
*UH6	287x592x600	M6	1700/50	4	3	1,6	0,03	E
*UH6/38	287x592x380	M6	1275/37	4	1,9	1,4	0,03	E
*UF7	592x592x600	F7	3400/60	8	6	2,8	0,05	E
*UF7/38	592x592x380	F7	2550/61	8	3,8	2,3	0,05	E
*UG7	490x592x600	F7	2800/60	6	4,6	2,4	0,05	E
*UG7/38	490x592x380	F7	2100/61	6	2,9	1,9	0,05	E
*UH7	287x592x600	F7	1700/60	4	3	1,6	0,03	E
*UH7/38	287x592x380	F7	1275/61	4	1,9	1,4	0,03	E

Other sizes are available on request - *Supplied with a 25mm header frame, if a 20mm header frame is required please specify *2.

As part of our continuous improvement, Camfil Farr reserve the right to change specifications without notice.

Bag Filters Syntetic Media

Model	Dimensions (WxHxD) mm	Filter classification EN779:2012	Air flow/pressure drop m ³ /hr/Pa	Number of pockets	Media area m ²	Unit weight kg	Unit volume m ³	Energy Rating
*UF8	592x592x600	F8	3400/80	8	6	2,8	0,05	E
*UF8/38	592x592x380	F8	3400/140	8	3,8	2,3	0,05	E
*UG8	490x592x600	F8	2800/80	6	4,6	2,4	0,05	E
*UG8/38	490x592x380	F8	2800/140	6	2,9	1,9	0,05	E
*UH8	287x592x600	F8	1700/80	4	3	1,6	0,03	E
*UH8/38	287x592x380	F8	1700/140	4	1,9	1,4	0,03	E

Other sizes are available on request - *Supplied with a 25mm header frame, if a 20mm header frame is required please specify *2.