

SPECIFICATION

PRATIKA 205 S

PRATIKA 205 S VARIOMATIC

TECHNICAL DATA


- Retractable shaft
- Fixed and mobile keypad
- Ladder pack brake
- Universal basket with rotation and sliding system
- 15 Position ladder block
- Head with fixed wheels and controls
- Cable storage
- External shaft block
- Wheels for side movement
- Motor 205S variomatic with voltage selector 3kw-2,5kw and automatic slowdown

PERFORMANCE


| | |
|---------------------------|------------------------|
| Height of reach | 21 m |
| Maximum capacity | 200 kg |
| Total weight | 750/900 kg |
| Working angle | 40°/88° |
| Functioning | electric 1,2 kw |
| Safety | CE |
| Dimensions of open basket | 1220 x 2070 mm |



LADDER DIMENSIONS PRATIKA 205 S - 205 S VARIOMATC

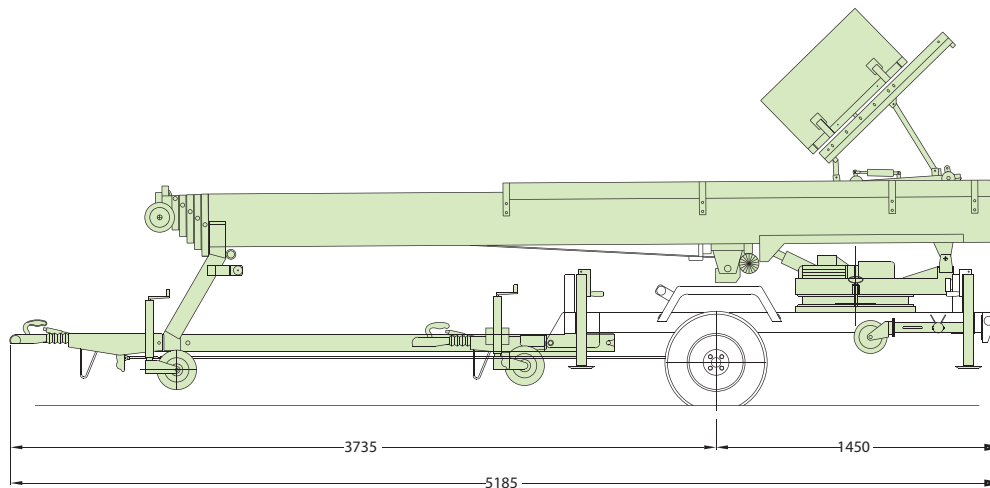

KEY POINTS

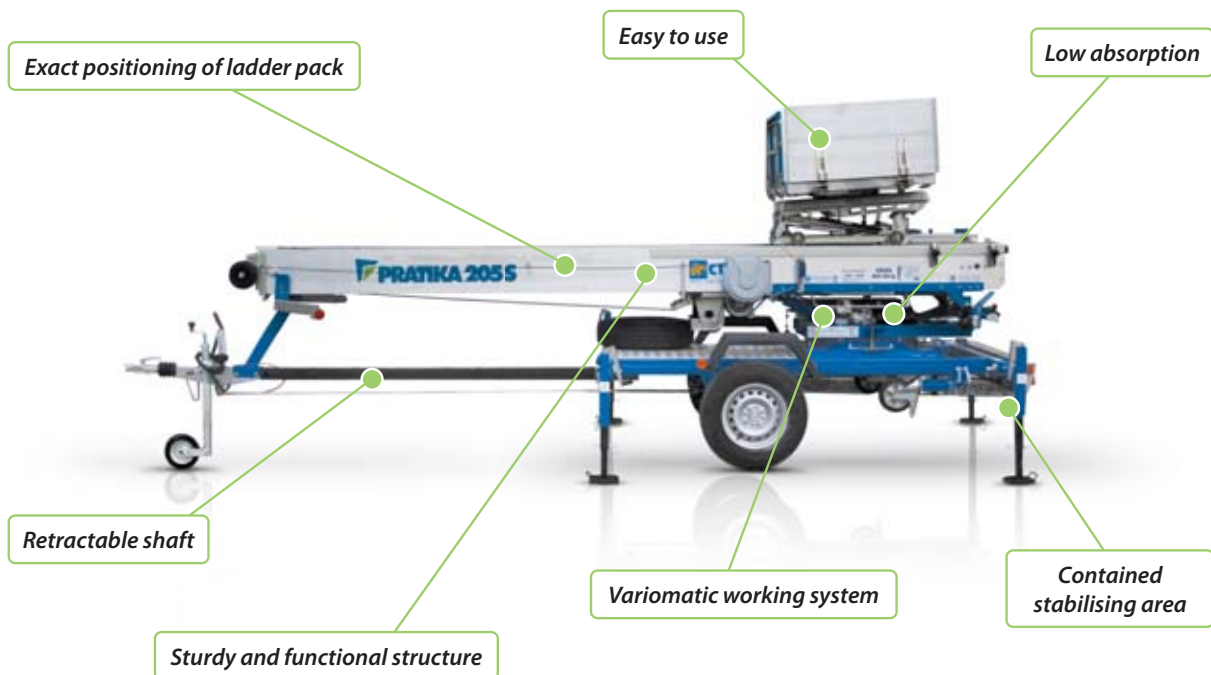

Product specifications are subject to change, without notice or obligation. Technical features and drawings in this brochure are for illustrative purposes only. _ PT12055 - ed. 10/09

ADVERTENDO.COM® We know how.



Branches: Rovereto, Dolo and S. Giuliano Milanese

CTE S.p.A. | www.ctelift.com

Sales Office Dolo (Ve) - dolo@ctelift.com
 ph. +39 041 51.00.130 - fax +39 041 41.38.44
 Headquarter Rovereto (Tn) - info@ctelift.com
 ph. +39 0464 48.50.50 - fax +39 0464 48.50.99
 Milano Branch S. Giuliano Milanese (Mi) - milano@ctelift.com
 ph. +39 02 98.81.100 - fax +39 02 98.28.20.96
 Bertinoro Branch & Factory (FC) - bertinoro@ctelift.com
 ph. +39 0543 44.88.30 - fax +39 0543 44.83.43

