




**POCKET THICKNESS GAUGE**  
**0,01 mm**

Code	C mm	P mm	mm				€
43030	0 - 5	25	0,01	A	8001066430307	1	-


- Reading 0,01 mm
- Pocket size
- With handle and lifting lever



**POCKET THICKNESS GAUGE**  
**0,01 mm**

Code	C mm	P mm	mm				€
43031	0 - 12	15	0,01	E	8001066430314	1	-

- Reading 0,01 mm
- Pocket size
- Extra flat execution

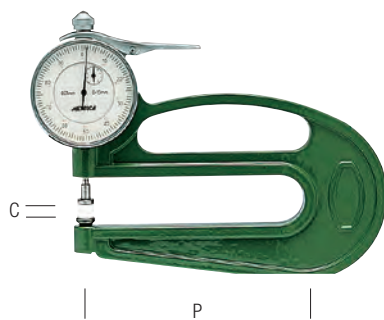

**DIAL THICKNESS GAUGE**

Code	C mm	P mm	mm				€
43032	0 - 10	50	0,01	A	8001066430321	1	-
43037	0 - 10	120	0,01	A	8001066430376	1	-
43034	0 - 10	200	0,01	A	8001066430345	1	-

- Reading 0,01 mm
- Aluminum support
- Lifting lever

**GRINDED STAINLESS STEEL TIPS:**

(special tips on request)


A



B



C



D




E




F



K



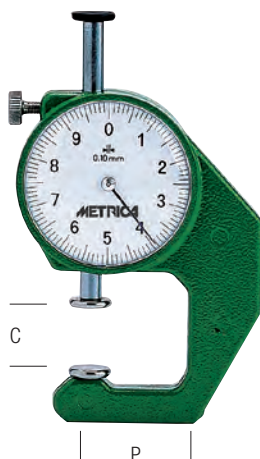

## POCKET THICKNESS GAUGE 0,1 mm

Code	C mm	P mm	Resolution mm	Lock	Barcode	Box	€
43051	0 - 10	20	0,1	A	8001066430512	1	–
43052	0 - 20	20	0,1	A	8001066430529	1	–
43068	0 - 20	20	0,1	B	8001066430680	1	–
43053	0 - 20	50	0,1	A	8001066430536	1	–
43069	0 - 20	50	0,1	B	8001066430697	1	–
43054	0 - 30	50	0,1	A	8001066430543	1	–


- Reading 0,1 mm
- Pocket type with lock
- Ergonomic shape
- Non slip painted aluminium support
- Synthetic leather pouch



## DIAL THICKNESS GAUGE 0,1 mm

Code	C mm	P mm	Resolution mm	Lock	Barcode	Box	€
43055	0 - 30	200	0,1	F	8001066430550	1	–
43049	0 - 30	200	0,1	K	8001066430499	1	–
43056	0 - 30	300	0,1	F	8001066430567	1	–
43061	0 - 30	300	0,1	K	8001066430611	1	–
43057	0 - 30	450	0,1	F	8001066430574	1	–
43059	0 - 50	300	0,1	F	8001066430598	1	–
43060	0 - 50	500	0,1	F	8001066430604	1	–



- Reading 0,1 mm
- Ergonomic handle
- Painted scratch resistant aluminum support
- Lifting lever



## INSIDE DIAL THICKNESS GAUGE

Code	C mm	P mm	Resolution mm	Lock	Barcode	Box	€
43100	15 - 35	75	0,01	D	8001066431007	1	–
43101	35 - 55	85	0,01	D	8001066431014	1	–
43102	55 - 75	100	0,01	D	8001066431021	1	–

- Reading 0,01 mm

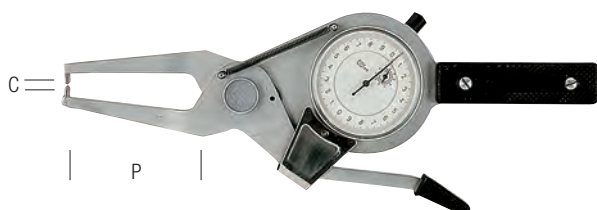

## OUTSIDE DIAL THICKNESS GAUGE

Code	C mm	P mm	Resolution mm	Lock	Barcode	Box	€
43120	0 - 20	60	0,01	D	8001066431205	1	–
43121	20 - 40	60	0,01	D	8001066431212	1	–
43122	40 - 60	60	0,01	D	8001066431229	1	–

- Reading 0,01 mm