

TECHNICAL SPECIFICATION

Insulating mounting terminal – TB25



Functions:

- provides a firm joining of rigid or flexible conductors up to 35mm² to power supply busbar
- provides a firm joining of the power supply conductor to the breaker
- provides enough contact surface of the conductor


Technical data:

- Brass alloy with galvanic cover
- Fabric isolated with plastic cover
- Appropriate for joining to copper or aluminum cables
- Rated voltage: 230V
- Rated current: up to 63A
- Isolating voltage: ≥500V
- IP code: IP>20
- Section of power supply conductor: up to 35mm²

Connecting:

- to the joining terminal of the breaker

Dimensions:

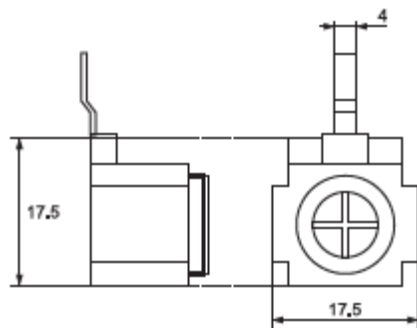

Variant:

Type	Section of the conductor	Rated current In (A)	Packing / Box (pcs)	Catalogue number
TB 25	2.5 to 35	63	20 / 2000	31025

Standard: EN 60947-7-1

