

RWV-C

Cabled fork scale with extended functions

BENEFITS

- Also in legal for trade version
- Compact scale fork dimensions
- Weight transfer to truck terminal
- Data transfer to WMS or ERP systems
- Tested 1,000,000 cycles at 125% of capacity

Top quality

Easy connectivity



RAVAS

FUNCTIONS

- Functions of 2100, 4100 or 6100 weight indicator
- See indicator specification sheet


The RAVAS indicators have been developed exclusively for mobile applications. They are robust and resistant to shocks and vibrations. RAVAS indicators are compact and have a low power consumption. All indicators are dust and waterproof, according to norm IP65. RAVAS mobile scales can be used outdoors and on freight trucks.

STANDARD SPECIFICATIONS

- Capacity 2,500, 3,000 or 5,000 kg
- Graduation
 - multirange 1/2 kg at 2,500 kg capacity
 - multirange 1/2 kg at 3,000 kg capacity
 - multirange 2/5 kg at 5,000 kg capacity
- System tolerance 0.1% of the load lifted
- Overload protection 200%
- Protection class IP65
- Cabling via spiral cable
- Power supply from truck battery, via converter



DIMENSIONS IN MM

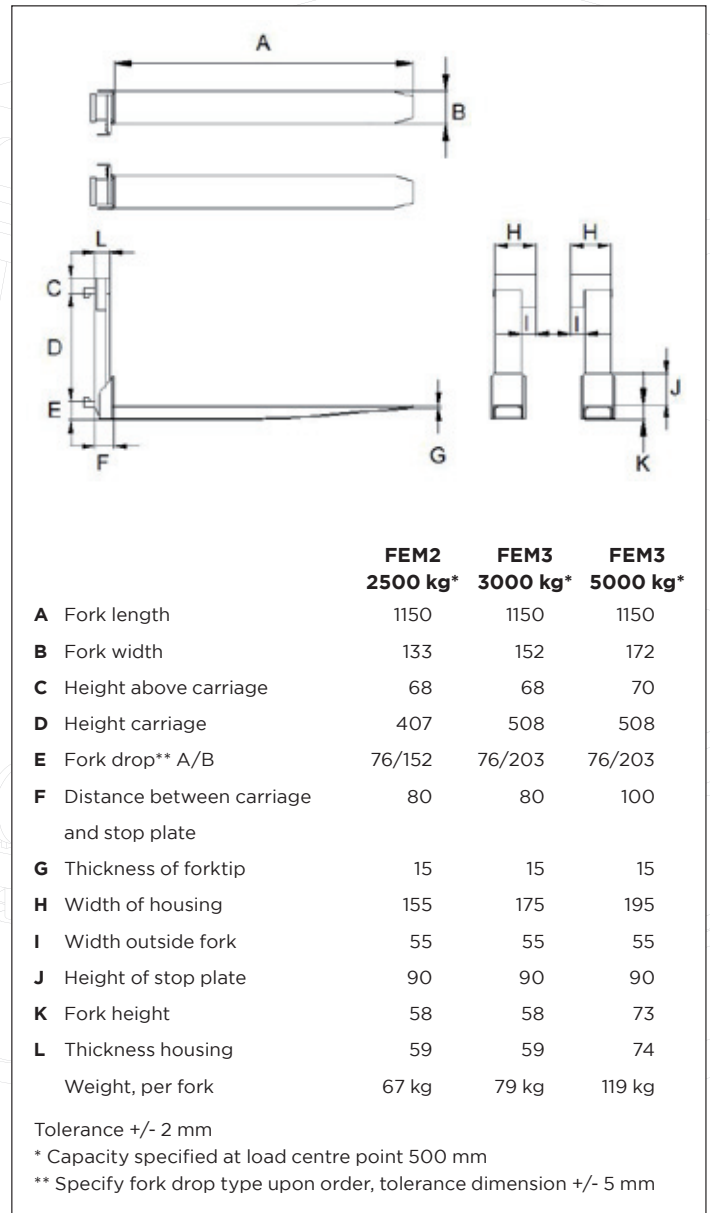

PREMIUM OPTIONS*

- Thermal or matrix printer
- UniMobile/UniWin software for data capture & transfer
- Legal for trade version, OIML III
- Cabling over rolls, integrated in the mast

OPTIONS*

- Smaller display graduations
- Different fork lengths
- Converter 80/48/36/24Vdc - 12Vdc
- 12 - 12V regulator for fixed power supply on IC-trucks
- Stainless steel fork shoes
- Explosion proof version for use in hazardous areas, zone I; ATEX certified

* The use of options may change related specifications.

RAVAS Europe B.V.

P.O. Box 2023, NL-5300 CA Zaltbommel, The Netherlands
 T. +31 (0)418 51 52 20, F. +31 (0)418 51 53 20
 backoffice@ravas.com, www.ravas.com

