



DMGT® Rambo Industrial (HongKong) Limited



Led Grow light 600W(DM-G600W Series)

Features:

1. Use led we produced to make led grow light to confirm quality control and favorable price
2. Use high efficient 576x1W led as the light source
3. Wide beam angle:120 degree(larger lighting area)
4. Red and blue wavelength can be adjusted according to your practical application
5. Ratio of red and blue is :8:1,we also could change the ratio according to your speical requirements
6. Red and blue mixed together provide exact spectrum for plant growth
7. Emitt exact spectrum required by photosynthesis,no light wasted in the light spectrum for plant growth
8. smart apparence,built-in switching mode power supply,light weight,small volum,small light decay,long lifespan:over 50,000h
9. Unique heat dissipation device:thermostatically controlled fans to keep LED light cool
10. Envionment-friendly:have no mercury and other harmful heavy metal,emit no light harmful for plant growth and energy saving
11. Different single colors are also available:single Red,single Blue and so on
12. Different powers are available :60w/90w/200w/250w/300w/600w for your selection
13. 2 years warranty,good after-sales service
14. Running quiet and cool,no need heat-removal equipment
15. Ideal for all phase of plant growth
16. Plug-and-play grow light,no need any accessories
17. Any plug are available

Application:

This led grow light is suitable for Hydroponics&Horticulture&Greenhouse lighting,Seeding/Seedling/Breeding,Farm/Flower Exhibition/Garden/Bonsai etc.

Website: <http://www.DMGT-ledlight.com>

Tel: 86-13670050434

E-mail :frank@rambotech.com

Fax: 86-755-82580472







DMGT® Rambo Industrial (HongKong) Limited



Specification:

Light source:576*1W
 Luminous flux:20000-22000LM
 Average Illuminance(LUX):H3m>480lux
 Range of irradiation(3M):>3*260M²
 CCT(K):630nm/660nm/450nm/Red+Blue/Red/Blue
 Color render index(CRI):>70
 Beam angle :120°
 Service life(Hrs):>50000Hrs
 Input voltage(V):86-240V/AC
 Input current(mA):300mA
 Toal consumption(W):600W
 Power factor(PF):0.95
 Luminaire efficiency:>90%
 Materials:Aluminium Alloy whit cooling fans
 Diffuser: PC
 Dimension L*W*H(mm):910*310*70mm
 Packing Size(cm):1030*410*175mm
 N.W(kg):18KG
 Electrical Class:Class I
 Proof class(IP):IP20
 Working temperature:-20-90%R.H
 Storage temperature:-40-100%R.H

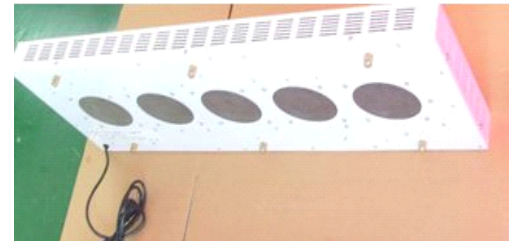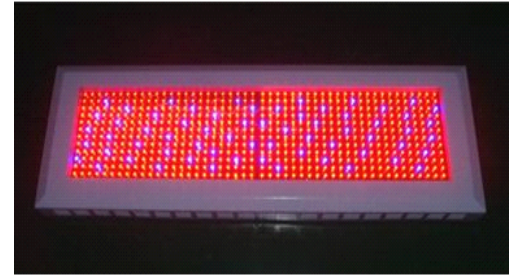

NO.	Voltage	Power	Angle	LM	wl	Price(\$)
DM-G600WRB	86-240V	576*1W	120°	22000	660nm+460nm	750
DM-G600WRRB	86-240V	576*1W	120°	23000	630nm+460nm	640
DM-G600WRR	86-240V	576*1W	120°	23000	630nm	640
DM-G600WR	86-240V	576*1W	120°	22000	660nm	750
DM-G600WB	86-240V	576*1W	120°	20000	460nm	640

Remark

- 1.Payment Terms:HSBC BANK and Western Union (For samples: 100%T/T before)
- 2.Lead time:3-5working day after receipt of your payment
- 3.Package:export carton packing
- 4.Price Term: FOB Shenzhen
- 5.Warranty for 3years,Supply 1%spare parts.
- 6.Mini Quantity: 2-3pcs each item

Tel: 86-13670050434

Fax: 86-755-82580472

