



Copertine Retractable Arm-awnings



Ce mai buna calitate, datorita materialelor folosite, produsele au o durata de viata exceptionala.

High quality of utilized raw materials, long working life.



TESUTUL THE FABRIC

Sun & Shadow va ofera o gama completa de culori moderne, proiectate si executate sa nu absoarba mirosuri, fiind rezistente la murdarie, smog, sare si radicali liberi.

Sun & Shadow offers a complete range of modern colours, which are made to absorb no smells and to resist dirt, smog, salt, free radicals and exhaust fumes.

MECANISME MECHANISMS

Bratele retractabile sunt prevazute cu un lant rezistent la coroziune, pentru o lunga durata de functionare. Organele de asamblare sunt executate din otel inox. Frontalul este prevazut cu un sistem de deversare controlata a apei.

The folding-arms have a corrosion resistant chain to ensure long life to the awning. The screws are made of stainless steel. The front profile is integrated with a drainage gutter.

GARANTIE WARRANTY

Copertinele Sun & Shadow sunt proiectate si executate pentru un design deosebit si o rezistenta exceptionala. Rezistenta, functionalitatea si tehnologia inglobate in aceste produse ne dau dreptul sa oferim 5 ani garantie.

Our awnings have been made to be pleasant and live long time. The robustness, the functionality, the technology, and the utilized good materials allow us to grant the 5 years warranty.



DESIGN 5 SIGURATA
DESIGN AND SAFETY

5 Ani garantie
5 Years warranty

Omologarea **ASSITES OR** garanteaza calitatea copertinelor si atentia noastra fata de client. Pentru respectarea acestei calitati fiecare model este in conformitate cu normele Europene CE : rezistenta la vant (UNI EN 1932), test de andurata (3000 cicluri de functionare), rezistenta la incarcatura cu apa (UNI EN 1933).

The ASSITES OR trade-mark guarantees the quality of our awnings and of our attention to the customer. To obtain it every model must be in conformity with the European CE norms: wind-resistance (UNI EN 1932), endurance test (3000 cycles), water load-resistance (UNI EN 1933).



Lant de tip multy-mesh, tratat si nichelat pentru o deosebita rezistenta in timp. Suport brate cu posibilitatea de reglaj de la 10° la 60°.
Tesutul este cusut cu ata GORE - Tenara, avand o garantie de 10 ani.

Multy-mesh nickel-plated steel chain, for maximum resistance over time. Arm support with angle adjustment from 10 to 60 degrees, with simple adjustment movement. Straight, non-angle arm, enabling the chain to work in perfect alignment without wear. Fabric sewn with GORE -Tenara thread, with seams guaranteed for 10 years.

Acoperis de protectie

Protective canopy



ROLLO

Copertine Retractable Arm awnings



COPERTINE RETRACTABILE

O copertina atractiva adauga o nota de personalitate si eleganta spatilor exterioare, gradinilor si teraselor, protejand in acelasi timp de soare si umezeala.

Frontal cu deversare controlata a apei.

Front rail with water drainage gutter.

ARM-AWNINGS

An attractive awning adds a pleasant, elegant and highly personal touch to outdoor areas, gardens, front lawns and terraces while protecting them from sun and damp.



Sistem frontal pentru copertine cu brate, incasat, pentru a primi si proteja tesutul, folosit pentru marirea protectiei solare, pastrand in acelasi timp inclinatia copertinei neschimbata.

Front rail system for arm-awnings with built in box to store and protect the fabric, used to increase sun protection while maintaining the inclination of the arm-mounted awning.



Copertine Retractable Arm—awnings

Solid, functional si sigur.
Solid, functional and safe

CONTROL AUTOMAT
AUTOMATIC CONTROLS

Chiar si cand nu sunteti acasa, senzorul exterior al copertinei are grija de aceasta, in momentul in care vantul devine periculos comandand inchiderea.

Even while you are out, the exterior sensor is constantly watching over your awnings, communicating directly and wireless with the motor inside the awning.



COMBY 250




DIM 250



DIM 300



DIM 400

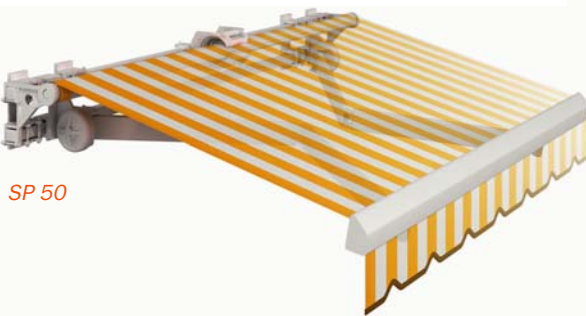

SP 50



MARCESA



Telecomanda, prin simpla apasare a unui buton se poate comanda inchiderea, deschiderea sau oprirea copertinei intr-o pozitie intermediara.

Remote control, with the touch of a button you can close, open and stop in an intermediate position your awning.



Placerea de a va personaliza copertina in functie de culoarea dorita si franjul ales. Tesutul este cusut cu ata Tenara, garantata 10 ani.

Mecanismul reductor de actionare standard asigura o manevrare simpla si usoara a copertinei. Se poate opta si pentru un control automat al copertinei cu motor si automatizare, senzor vant, soare-vant si telecomanda.

Structura din aluminiu a copertinei este vopsita in camp electrostatic de serie RAL 9010 dar se pot alege la comanda si alte culori RAL.

The pleasure of personalize your awning with the colour of fabric and the pelmet form you prefer. The fabric is sewn with Tenara thread of GORE and the seams are guaranteed 10 years.

The standard control with conic section crank for a soft and fast operation. You can also operate your awning with an automatic control: motorization and automatism like remote control wind or sun and wind protection.

The standard aluminium frame is white vernished RAL 9010, but you may select from RAL colours to coordinate with the fabrics.

Centralis RTS



Telecomanda cu fixare pe parete
Wall remote controll

Telis NEW PATIO
Telis ATRIO



Telecomanda pentru motor cu radiocomanda.
Remote control for motor RTS



SOLIRIS RTS

O automatizare soare si vant care controleaza continuu copertina in functie de luminozitate si intemperii.

It is a wireless sun and wind device that controls your awning automatically, providing shading when needed and retracting the awning with strong wind.



EOLIS RTS

O automatizare pentru protectie la vant.

It is an automatic radio wind control.

Telis Soliris NEW PATIO
Telis Soliris ATRIO




Control unit for Soliris RTS.

COPERTINE RETRACTABLE

ARM-AWNINGS


Comby 250

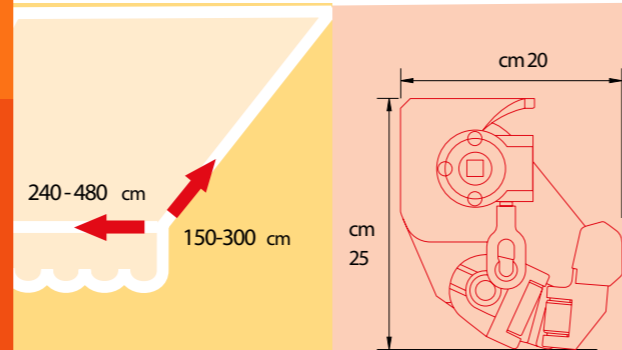

COPERTINE RETRACTABLE

ARM-AWNINGS

DIM 250

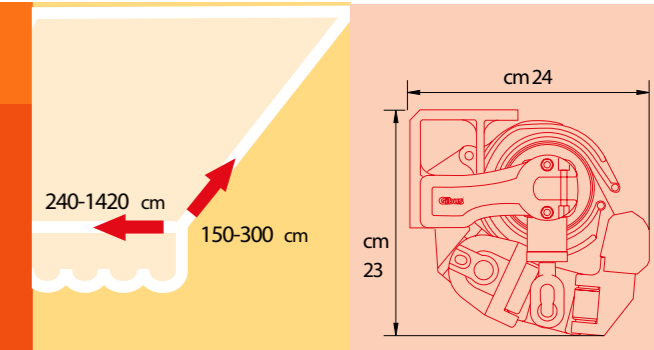

ASSITES
OMOLOGAZIONE

NORME TECNICHE
Mod. COMBY 250
Misura Max LxSp. cm 480x245

UNI EN 1932 RESISTENZA AL VENTO Classe 2 70 N/m²	ASSITES 41/95 DURATA Cl. 3000	UNI EN 1933 CARICO D'ACQUA Classe 2
--	--	--

CE

Omologare ASSITES
clasa 2, norme CE.

ASSITES Homologated:
Cl. 2. Highest wind
resistance, CE Norms



ASSITES
OMOLOGAZIONE

NORME TECNICHE
Mod. DIM 250
Misura Max LxSp. cm 590x250


UNI EN 1932 RESISTENZA AL VENTO Classe 2 70 N/m²	ASSITES 41/95 DURATA Cl. 3000	UNI EN 1933 CARICO D'ACQUA Classe 2
--	--	--

CE

Omologare ASSITES
clasa 2, norme CE.

ASSITES Homologated:
Cl. 2. Highest wind
resistance, CE Norms


COMBY 250

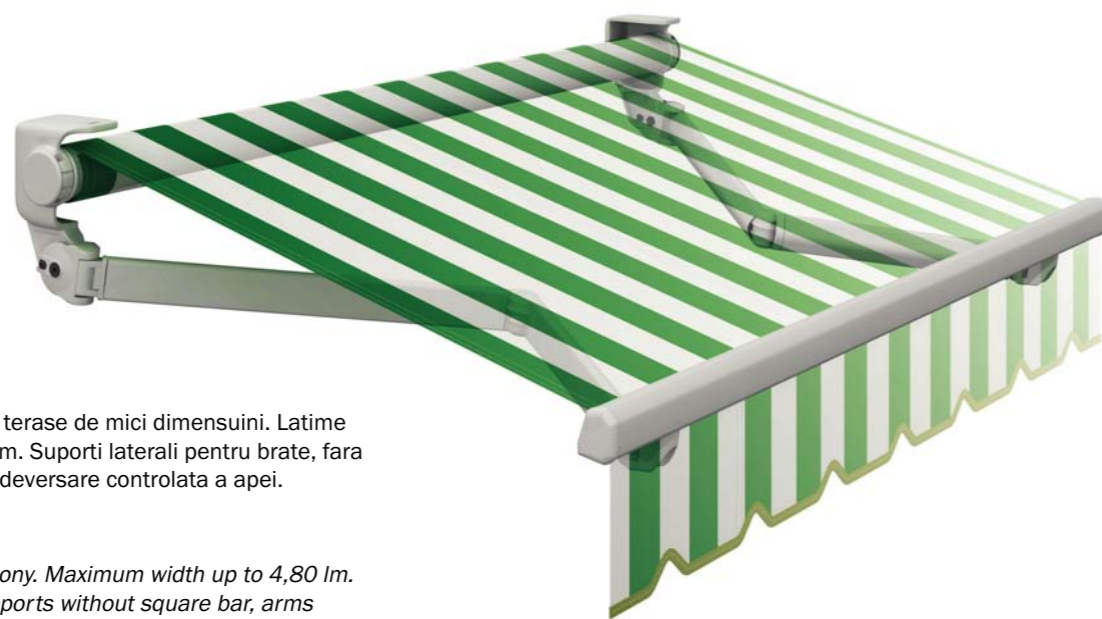

O copertina ideala pentru balcoane si terase de mici dimensiuni. Latimea maxima 4,80 m. si deschiderea 3,00 m. Suporti laterali pentru brate, fara bara patrata, brate cu lant, frontal cu deversare controlata a apei. Organe de asamblare inox.


This is the id al awning for a little balcony. Maximum width up to 4,80 lm. and projection to 3,00 lm. Lateral supports without square bar, arms with chain, front rail with water drainage gutter. Stainless steel screws.

DIM 250

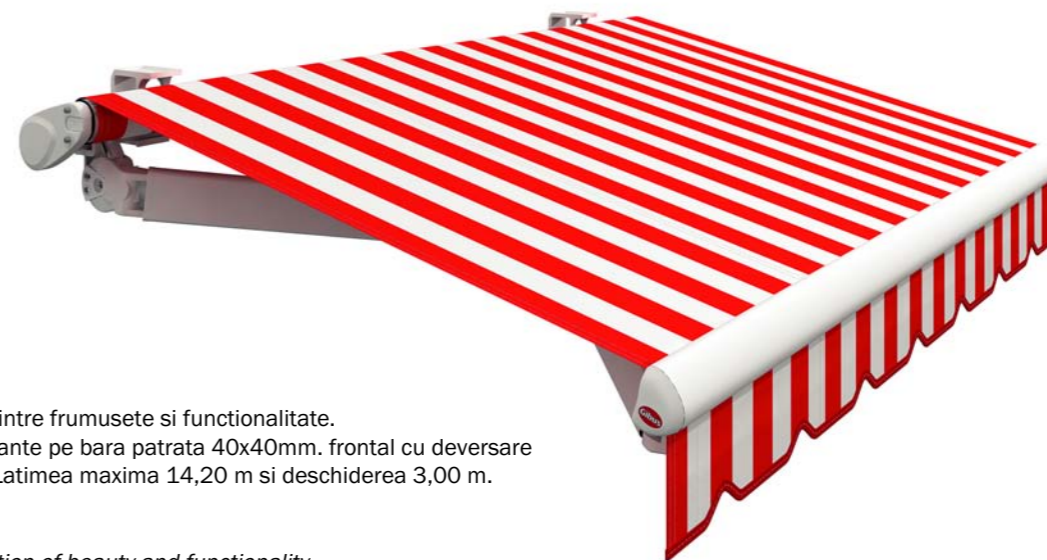

Combinatia ideala intre frumusetate si functionalitate. Brate cu lant montante pe bara patrata 40x40mm. frontal cu deversare controlata a apei. Latimea maxima 14,20 m si deschiderea 3,00 m.


The ideal combination of beauty and functionality. Arm-awning with 40 x 40 mm. square-bar, arms with chain, front rail profile with drainage gutter. Maximum width 14,20 m. and projection 2,50 m.

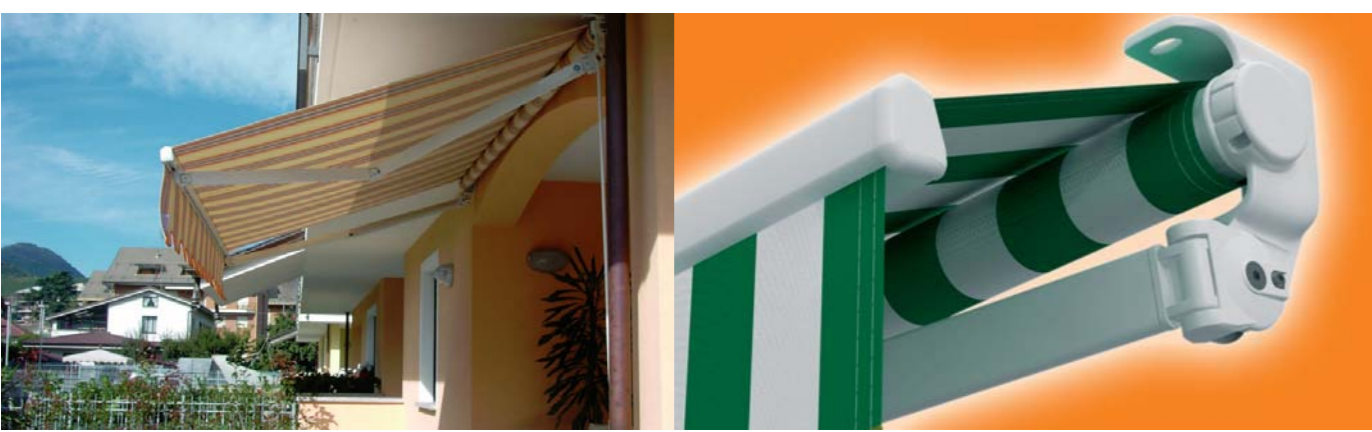

COPERTINE RETRACTABLE

ARM-AWNINGS

DIM 300

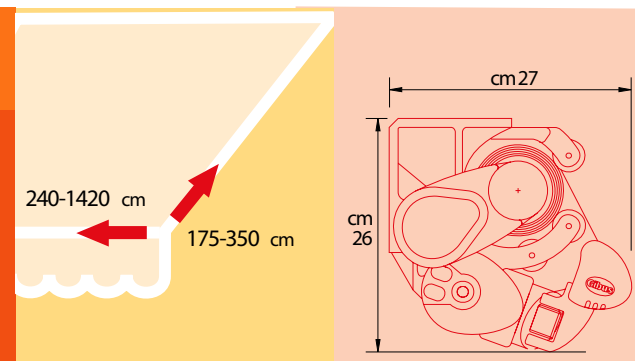

OMOLOGAZIONE ASSITES RESISTENZA AL VENTO
Mod. DIM 300
Misura max. larghezza x sporgenza cm. 590 x 285
CLASSE 2 70NM
NORME TECNICHE EN 1932
EN 1932


Omologare ASSITES
clasa 2, norme CE.

ASSITES Homologated:
Cl. 2. Highest wind
resistance, CE Norms

COPERTINE RETRACTABLE

ARM-AWNINGS

DIM 400

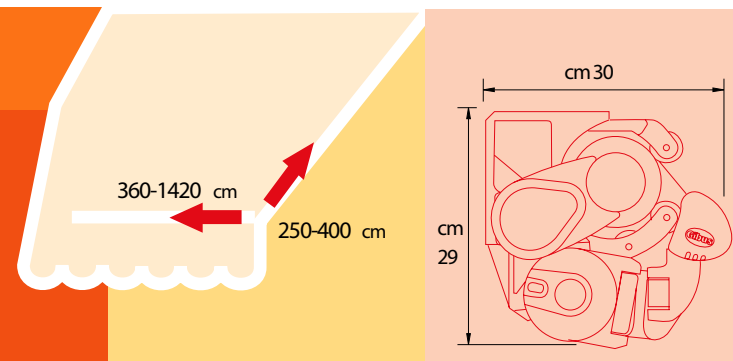


NORME TECNICHE
Mod. DIM
Misura Max LxSp. cm 590x330
UN EN 1932 RESISTENZA AL VENTO Classe 2 70 N/m²
ASSITES 4195 DURATA Cl. 2 3000
UN EN 1933 CARICO D'ACQUA Classe 2

Omologare ASSITES
clasa 2, norme CE.

ASSITES Homologated:
Cl. 2. Highest wind
resistance, CE Norms

Gibus DIM 300

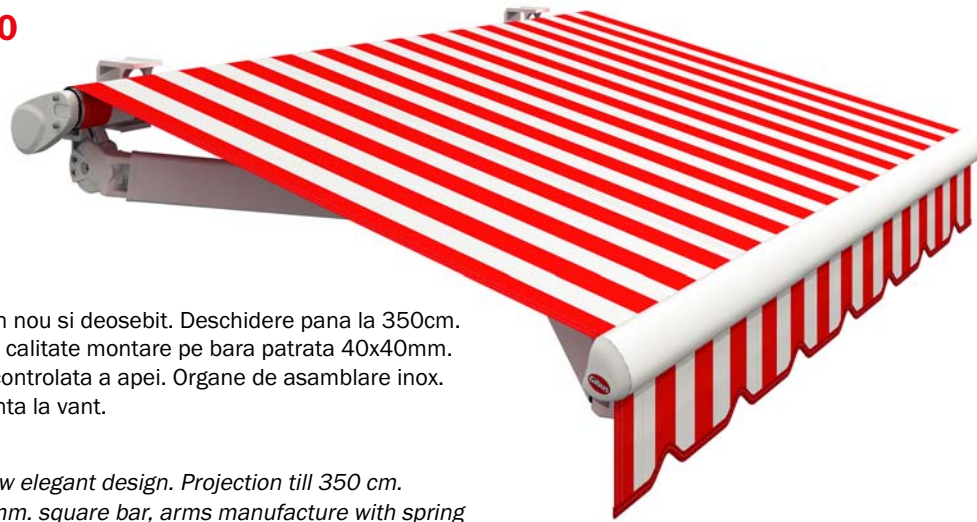

Un model cu un design nou si deosebit. Deschidere pana la 350cm.
Brate cu lant de inalta calitate montare pe bara patrata 40x40mm.
Frontal cu deversare controlata a apei. Organe de asamblare inox.
Clasa 2, inalta rezistenta la vant.

Arm-awning with a new elegant design. Projection till 350 cm.
Mounted on 40 x 40 mm. square bar, arms manufacture with spring
and chain of high quality. Front rail with water drainage gutter.
Stainless steel screws. Cl. 2 highest wind resistance.

Gibus DIM 400



Cel mai avansat model de copertina pentru acoperiri medii si mari.
Brate cu lant de inalta calitate montate pe bara patrata 40x40mm.
Frontal cu deversare controlata a apei. Organe de asamblare inox.
Latime maxima 14,20 m si deschidere 4,00m.



The most advanced arm-mounted awning for medium large coverage.
Arm-awning on 40 x 40 mm. square-bar, arms with chain,
front rail profile with drainage gutter. Stainless steel screws.
Maximum width 14,20 m. and projection 4,00 m.



COPERTINE RETRACTABILE

ARM-AWNINGS


SP 50Q

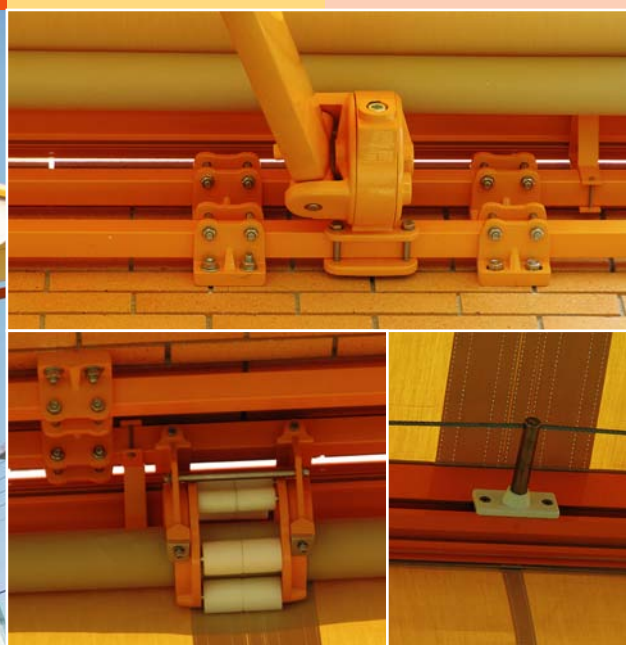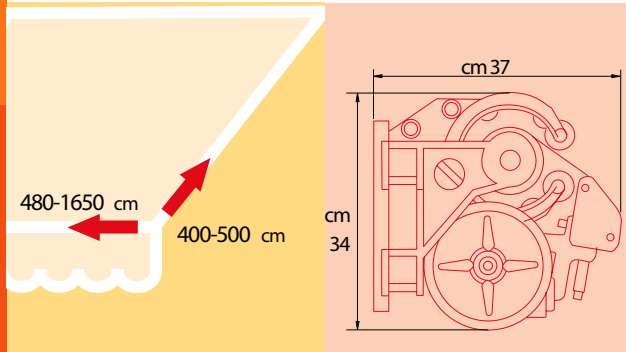

Gibus SP 50Q.

Copertina montata pe bara dubla 40x40mm. Destinata acoperirilor de mari dimensiuni.
Latime maxima 16,50m cu deschidere 5,00m.
Actionare numai cu motor.

*Awning mounted on double 40 x 40 mm square-bar.
To cover large areas; ideal for public places.
Maximum width 16,50 m. and maximum
projection 5,00 m.
Motorized control required.*

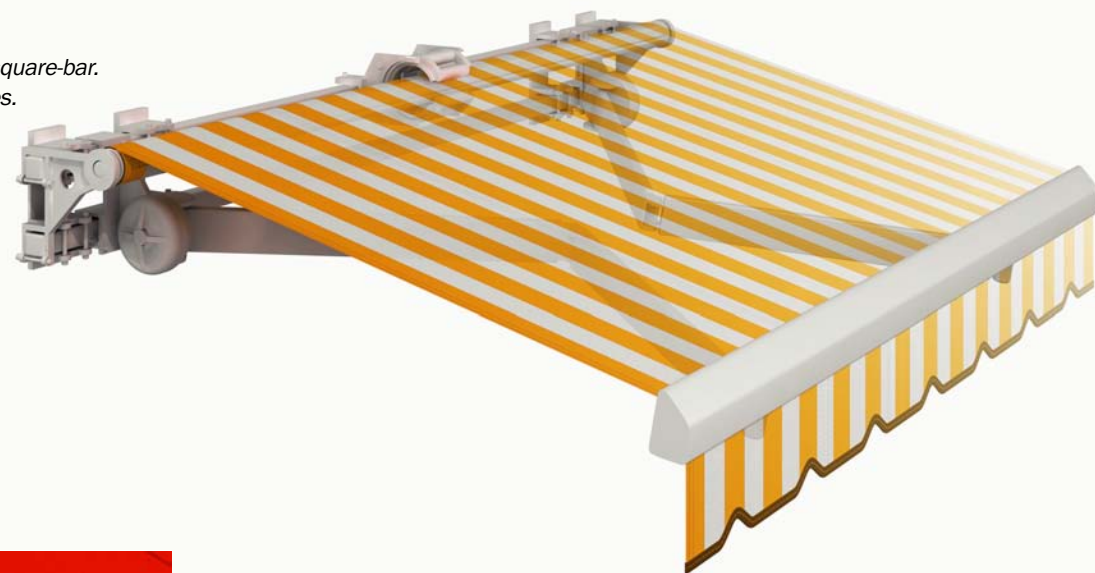

COPERTINE RETRACTABILE

ARM-AWNINGS

Marcesa





Omologare ASSITES
clasa 2, norme CE.

ASSITES Homologated:
Cl. 2. Highest wind
resistance, CE Norms



MARCESA 30Q/50

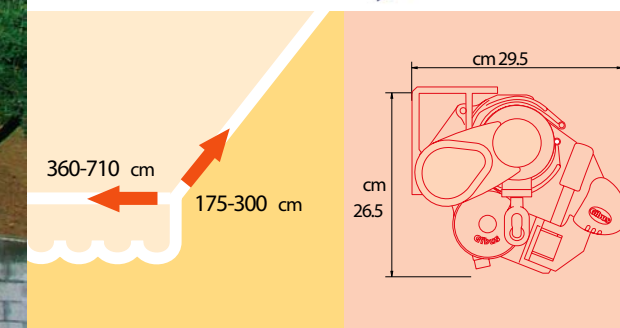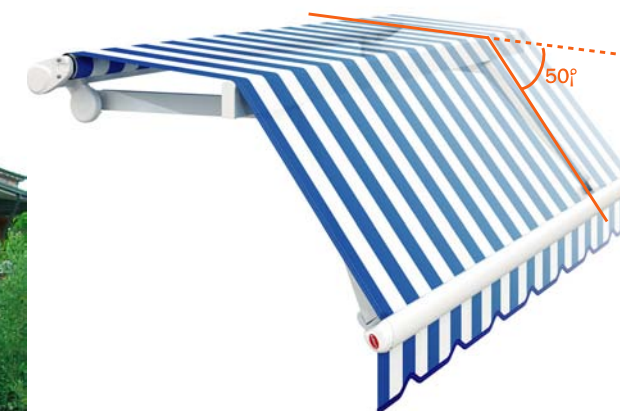

Gibus Marcesa.

Trei modele de copertine mobile cu dubla inclinatie.
Marcesa 30Q/50 cu inclinatie 50°, Marcesa 30Q/13 cu inclinatie 13°, ambele cu
cu deschidere maxima 3,00m si Marcesa 35Q/13 cu inclinatie 13° si deschidere 3,75m.

*Three differents awning models with double inclination.
Marcesa 30Q/50 folt 50°, Marcesa 30Q/13 folt 13° both with maximum projection
3,00 m. and Marcesa 35Q/13 folt 13° mit maximum projection 3,75 m.*

MARCESA 30Q/13



MARCESA 35Q/13

