

Dezumidificatoare pentru piscine


**SP46**  
**SP32**



**DEHUMIDIFIERS FOR SWIMMING POOLS SP46 · SP32**



Distribuitor: AB Tehnic Profesional  
Str. Alunisului 164  
Tel: 021.3320848  
Email: [office@abtehnic.ro](mailto:office@abtehnic.ro)  
[www.abtehnic.ro](http://www.abtehnic.ro)

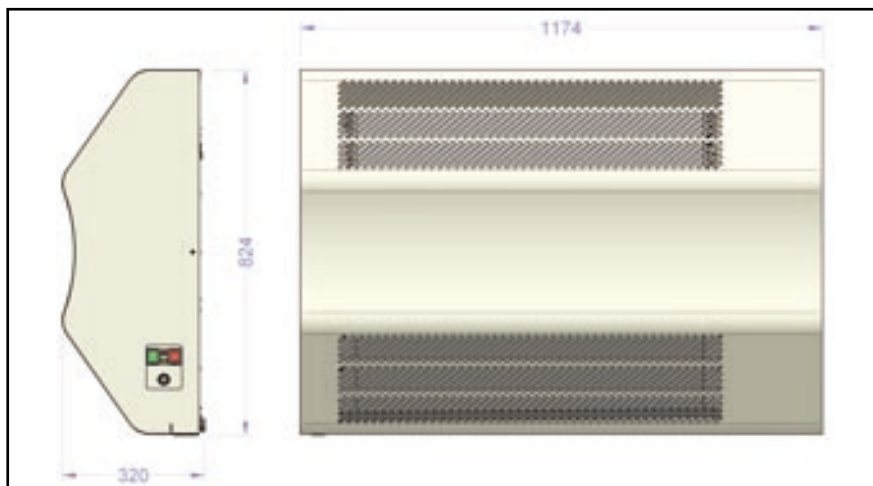

## RO

### Caracteristici principale

- Design inovativ si elegant
- Montare pe perete
- Umidostat incorporat
- Agent frigorific gaz R407 C ecologic
- Compresor rotativ
- Controale de joasa tensiune
- Presetare pentru umidostat la distanta
- Presetare pentru termostat la distanta
- Presetare pentru electroventil la distanta
- Caroserie alcatuita dintr-o singura piesa, usor de demontat pentru intretinere.

### Accesorii:

- Schimbator de caldura pentru apa calda, aditional
- Ventil electromagnetice 3 cai
- Incalzitor electric aditional
- Suport pentru montarea pe podea


## EN

### Main Features:


- Innovative elegant design
- Wall mounting
- Built-in humidistat
- Ecologic refrigerant gas R407 C
- Rotary compressor
- Low voltage controls
- Preset for remote humidistat
- Preset for remote thermostat
- Preset for remote electric valve
- One piece body cover easy to remove for service

### Accessories:

- Hot water additional heat exchanger
- Three ways solenoid-valve
- Additional electric heater
- Floor standing mounting bracket

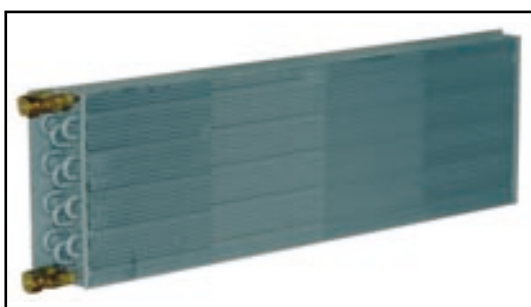

Schimbator de caldura pentru apa calda/ Additional hot water heat exchanger

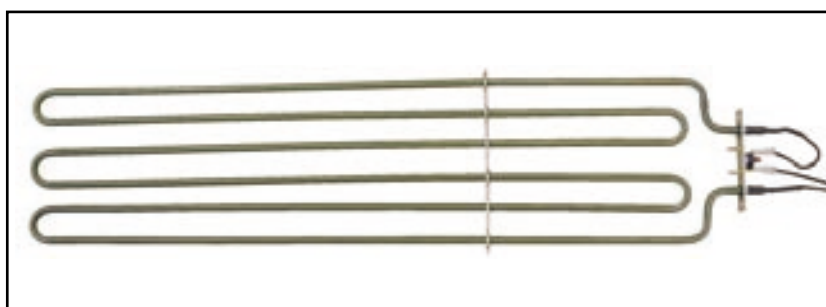

Incalzitor electric aditional/ Additional electric heater

DATE TEHNICE - TECHNICAL FEATURES		SP32	SP46
Capacitate de condensare la 25°C, 65% U.R. - Condensation capacity at 25°C, 65% R.H.	l/24h	34	49
Capacitate de condensare la 28°C, 60% U.R. - Condensation capacity at 28°C, 60% R.H.	l/24h	32	46
Capacitate de condensare la 30°C, 80% U.R. - Condensation capacity at 30°C, 80% R.H.	l/24h	52	81
Flux de aer - Air flow	m <sup>3</sup> /h	600	680
0 singura faza de alimentare - Single phase power supply		230V, 50Hz	230V, 50Hz
Putere absorbita la 28°C, 60% U.R. - Absorbed power at 28°C, 60% R.H.	W	700	960
Umiditate de lucru % U.R. - Working Humidity	% R.H.	35...100	35...100
Capacitate de incalzire a schimbatorului de caldura aditional cu apa de 80°C/ Heating capacity of additional heat exchanger with 80°C hot water	W	6300	6900
Capacitate incalzitor electric aditional - Additional electric heater capacity	W	2000	2000
Dimensiuni (I x L x D)- Dimensions (H x W x D)	mm	822 x 1174 x 314	822 x 1174 x 314
Greutate fara accesorii- Weight without accessories	Kg	65	72
Nivel zgomot la 1 m - Noise level at 1 m distance	dBa	57	59

Datele mentionate mai sus sunt orientative si pot suferi modificari fara o avertizare prealabila.  
The above mentioned data are only indicative and may undergo variations without prior warning.