



SP-32W SP-46W



Dezumidicator pentru piscine
Dehumidifier for swimming pools



Distribuitor: AB Tehnic Profesional
Str. Alunisului 164
Tel. 021.3320848
Email: office@abtehnic.ro
www.abtehnic.ro

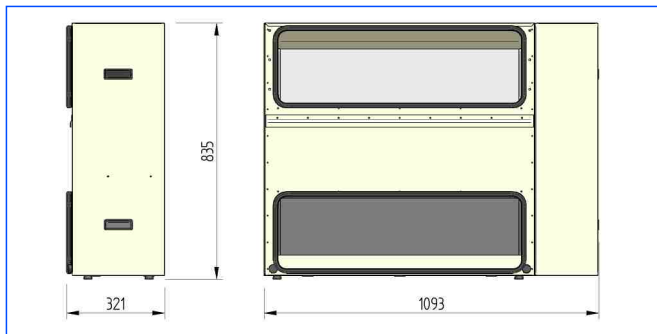


ROMANA Instalare

Dezumidificatoarele SP-32W si SP-46W au fost proiectate pentru a fi instalate intr-o camera aproape de cea care trebuie dezumidificata. Aerul este aspirat printr-un orificiu pe peretele din partea de jos a dezumidicatorului si este reintrodus din nou in camera prin gaura superioara, dupa ce a fost dezumidificat. Toate comenzile umidicatorului au fost montate intr-un panou de control, ce poate fi instalat intr-un loc comod si practic.

Caracteristici principale

- ◆ Agent frigorific ecologic R407c.
- ◆ Refulare continua a apei.

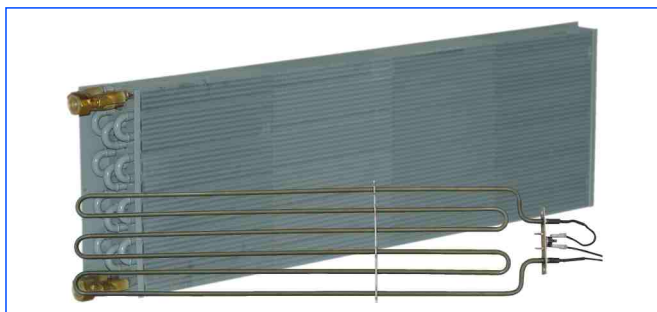

- ◆ Teaca de sprijin pe orificiile de intrare si iesire ale aerului
- ◆ 3 intrari posibile pentru cablurile de alimentare
- ◆ Picioare de nivelare verticale si orizontale si corp din otel galvanizat.
- ◆ Schimbatoare de caldura din aluminiu si cupru vopsit
- ◆ Acces rapid la compresor si cabluri

Accesorii

- ◆ Panou electric de control
- ◆ Schimbator de caldura pentru incalzirea apei
- ◆ Rezistenta de incalzire de 2 kw
- ◆ Grilaje de intrare si iesire a aerului.

✉ office@abtehnic.ro

ENGLISH

Installation

The Dehumidifiers series SP-32W and SP-46W has been designed to be installed on a room near the one to be dehumidified. The air is sucked through a hole on the wall from the lower part of the dehumidifier, and is blown in again in the room from the upper hole after being dehumidified. All the controls for the machine are put in a remote control box, that can be installed where it's more easy and practical to be accessed.


Main features

- ◆ Ecologic refrigerant gas R407c.
- ◆ Continuous water discharge.
- ◆ Support sheet on air inlet and outlet holes Nr.3 possible inlet for power supply cables.
- ◆ Vertical and horizontal levelling feet Body and body cover made in painted zinc plated steel.
- ◆ Heat exchangers made of painted copper and aluminium.
- ◆ Rapid access cover on cabling and compressor box.

Accessories

- ◆ Electrica control box
- ◆ Water heat exchanger for outlet air heating.
- ◆ 2 Kw heating resistance for outlet air heating.
- ◆ Air inlet and outlet grilles.

✉ sales@cuoghi-luigi.it

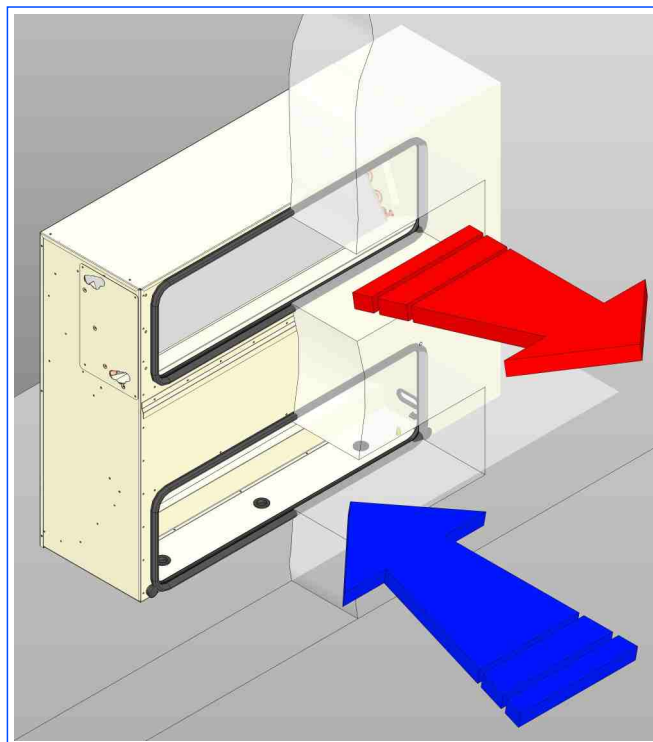

	SP-32W	SP-46W	
Capacitate de condensare la 25°C, 65%U.R.[L/24ore]	34	49	Condensation capacity at 25°C, 65% R.H.[L/24hour]
Capacitate de condensare la 28°C, 60%U.R.[L/24ore]	32	46	Condensation capacity at 28°C, 60% R.H.[L/24hour]
Capacitate de condensare la 30°C, 80%U.R.[L/24ore]	52	81	Condensation capacity at 30°C, 80% R.H.[L/24hour]
Flux de aer [m³/ora]	600	680	Air flow [m³/hour]
Putere absorbita la 28°C, 60%U.R. [W]	700	960	Absorbed power at 28°C, 60% [W]
Alimentare electrica	230 V, 50 Hz		Power supply
Temperatura de lucru [°C]	+5 ... +35		Working temperature [°C]
Umiditate de lucru [%u.r.]	35 ... 100		Working humidity [%R.H.]
Capacitate incalzitor electric additional [W]	2000		Additional electric heater capacity [W]
Capacitate de incalzire a bateriei cu apa la 80°C [W]	6300	6900	Heating capacity of additional heat exchanger with 80°C hot water [W]
Greutate fara accesorii [Kg]	62	69	Weight without accessories [Kg]

Datele de mai sus pot fi schimbate fara preaviz./ The above data are subject to change without notice.



Distribuitor: AB Tehnic Profesional
Str. Alunisului 164
Tel: 021.3320848
Email: office@abtehnic.ro
www.abtehnic.ro