

## EX1250 STATIC ELIMINATOR BAR

The EX1250 Bar is a high performance static eliminator with ATEX certification for use in hazardous areas.

**Maximum ionisation performance in a hazardous area.**


- > The EX1250 is part the Fraser 1250 family of static eliminators, which offer market-leading reliability and performance.
- > Stay-sharp etched emitters for better long term performance. Life 5 years +. Non-infectious.
- > Emitters at 15mm pitch provide more ionisation and so better neutralisation.
- > Robust construction, but compact and easy to install.
- > Operating distance up to 150mm. Best distance for high speeds and high charges 25 - 50mm.
- > Washable and suitable for food, medical and pharmaceutical applications.
- > All electronic components are fully encapsulated for maximum reliability.
- > Certified for Zones 1, 2 and 22. Gas group IIB (ethylene).



### Specification

<b>Length:</b>	Any size from 120mm to 6000mm. Active length is 70mm less than overall length.
<b>Mounting:</b>	M4 x 20mm hexagon studs slide in slot for mounting.
<b>Cable:</b>	3m of cable in protective nylon conduit is standard, longer lengths can be specified at time of order. Please check that 3m is sufficient - the Power Unit must be positioned outside the hazardous area.
<b>Safety:</b>	High resistance in emitters for shockless operation.
<b>Power Unit:</b>	HP EX Power Unit, must be positioned outside of the hazardous area.
<b>Options:</b>	Airboost – see 1250 AB. Optional remote function monitoring showing status of high voltage and whether Bars require cleaning. 90° cable exit. Monitoring and alarm function on Power Unit.

## Dimensions (mm)

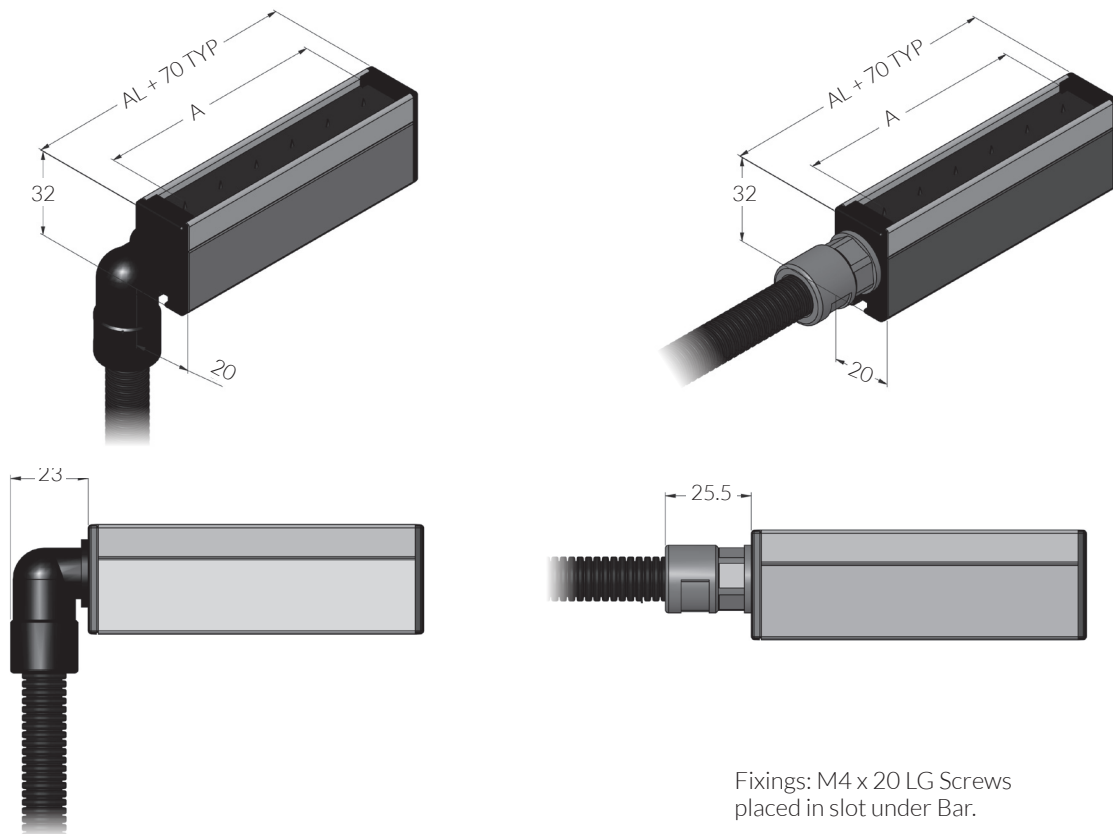

Fixings: M4 x 20 LG Screws  
placed in slot under Bar.

Dimensions in mm.

## ATEX Certification

The details of the ATEX certification for the EX1250 Bar are:

EX-1250 Static Eliminator Bar YYYY/NNNN	
II 2G IIB T6 (-20° ≤ Ta ≤ +50°C)	
Baseefa 07ATEX0157X	1180
Fraser Anti-Static Techniques Ltd, Scotts Business Park, Bampton EX16 9DN UK	
<a href="http://www.fraser-antistatic.co.uk">www.fraser-antistatic.co.uk</a>	<a href="mailto:sales@fraser-antistatic.co.uk">sales@fraser-antistatic.co.uk</a>

### Explanation

- II** Industrial equipments.
- 2** Equipment category: high protection. Suitable for zones 1 and 2.
- G** Equipment used in potentially explosive atmospheres caused by presence of explosive gas, vapour and mist. Certification also covers zone 22 dust.
- IIB** Gas Group. Group IIB covers Ethylene, in addition to the IIA Gases including Acetone, Benzene, Butane, Ethanol, Methane, Propane, Toluene and Xylene.
- T6** (-20 °C ≤ Ta ≤ +50°C) Temperature class. Maximum Surface Temperature T6 = 85°C.

### How does it work?

The EX1250 is powered by the EXHP Power Unit, a high load 6kV Power Unit.  
Please see separate Datasheet for more details.