

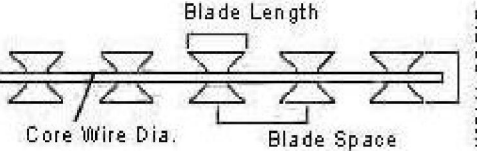






Blade Specification & Forms

Blade Specification	Blade Forms	Blade Thickness	Core Wire Dia.	Blade Length	Blade Width	Blade Space
BTO-10		0.5±0.05	2.5±0.1	10±1	13±1	26±1
BTO-12		0.5±0.05	2.5±0.1	12±1	15±1	26±1
BTO-18		0.5±0.05	2.5±0.1	18±1	15±1	33±1
BTO-22		0.5±0.05	2.5±0.1	22±1	15±1	34±1
BTO-28		0.5±0.05	2.5	28	15	45±1
BTO-30		0.5±0.05	2.5	30	18	45±1
CBT-60		0.6±0.05	2.5±0.1	60±2	32±1	100±2
CBT-65		0.6±0.05	2.5±0.1	65±2	21±1	100±2

Blade Specification Size

Ex. Dia.	No. of Turns	Standard Covering Length	Production Model	Remarks
450mm	33	8M	CBT-65	Single coil
500mm	41	10M	CBT-65	Single coil
700mm	41	10M	CBT-65	Single coil
960mm	53	13M	CBT-65	Single coil
500mm	102	16M	BTO-12.18.22	Cross type
600mm	86	14M	BTO-12.18.22	Cross type
700mm	72	12M	BTO-12.18.22	Cross type
800mm	64	10M	BTO-12.18.22	Cross type
960mm	52	9M	BTO-12.18.22	Cross type