




LIDERING

GARNITURES MÉCANIQUES 390 S

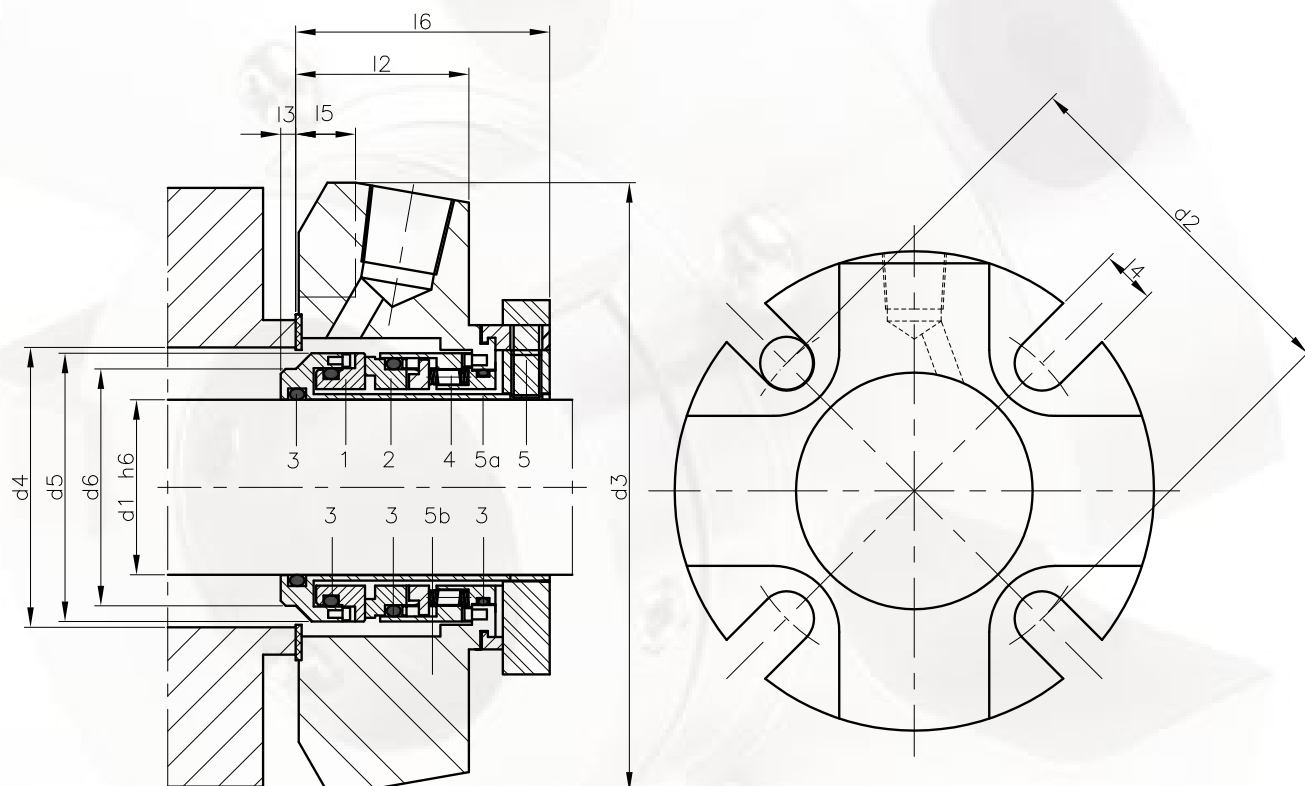

Garnitures Mécaniques 390 S

Cartouche simple, équilibrée,
ressorts multiples et sens
de rotation indépendant.



TABLEAU DIMENSIONNEL (Dimensions en mm. sujettes à variations ou modifications)

Ref.	d ₁	d ₂	d ₃	d ₄ Min.	d ₄ Max.	d ₅	d ₆	l ₂	l ₃	l ₄	l ₅	l ₆
25	25	71.2	101.6	41.3	48.0	39.7	34.9	34.4	1.0	13.3	13.5	49.6
28	28	74.5	104.8	44.5	51.2	42.9	38.1	36.7	1.0	13.3	13.5	52.4
30	30	79.9	108.0	46.1	56.5	44.5	40.0	36.7	1.0	13.3	13.5	52.4
32	32	81.6	108.0	47.6	58.3	46.0	41.3	36.7	1.0	13.3	13.5	52.4
33	33	84.8	111.1	50.8	61.5	49.3	44.5	36.7	1.0	13.3	13.5	52.4
35	35	84.8	111.1	50.8	61.5	49.3	44.5	36.7	1.0	13.3	13.5	52.4
38	38	91.4	123.8	57.2	68.1	55.5	49.2	37.8	1.0	13.3	15.1	54.0
40	40	95.7	127.0	60.3	71.4	58.7	52.4	37.8	1.0	14.3	15.1	54.0
43	43	98.4	133.4	63.0	74.1	61.1	55.1	37.8	1.0	14.3	15.1	54.0
45	45	98.4	133.4	63.0	74.1	61.1	55.1	37.8	1.0	14.3	15.1	54.0
48	48	98.4	133.4	66.7	74.1	64.7	58.7	37.8	1.0	14.3	15.1	54.0
50	50	101.6	139.7	70.0	76.6	67.9	61.9	40.7	1.6	17.4	15.1	58.7
53	53	113.5	148.8	73.0	85.3	71.1	65.1	40.7	1.6	17.4	15.1	58.7
55	55	113.5	148.8	75.0	85.3	72.9	66.7	40.7	1.6	17.4	15.1	58.7
58	58	116.0	165.1	76.2	88.5	74.2	68.2	40.7	1.6	17.4	15.1	58.7
60	60	119.9	165.1	79.4	91.7	77.4	71.4	43.6	1.6	17.4	15.9	62.6
63	63	127.0	171.5	85.7	98.8	83.8	77.8	43.6	1.0	17.4	15.9	65.1
65	65	127.0	171.5	85.7	98.8	83.8	77.8	43.6	1.0	17.4	15.9	65.1
68	68	131.3	171.5	92.1	103.2	90.2	84.1	41.3	1.0	17.4	15.9	63.5
70	70	131.3	171.5	92.1	103.2	90.2	84.1	41.3	1.0	17.4	15.9	63.5
75	75	145.3	196.9	101.6	113.5	98.1	92.1	45.4	1.0	20.6	17.4	65.1
80	80	148.5	188.9	105.0	116.8	102.2	95.3	40.5	1.3	20.6	17.4	63.8
85	85	154.8	206.4	111.1	123.2	107.9	101.6	40.5	1.3	20.6	17.4	65.1
90	90	158.6	212.7	117.5	129.5	114.3	107.1	40.5	1.3	17.5	17.4	65.1
95	95	172.0	222.3	120.0	132.1	117.5	110.3	40.5	1.3	17.5	17.4	65.1
100	100	171.7	228.6	127.0	139.7	123.8	116.7	40.5	1.3	20.6	17.4	65.1
105	105	174.9	228.6	130.2	142.9	127.0	119.8	40.5	1.3	20.6	17.4	65.1
110	110	184.4	241.3	139.7	152.4	136.5	129.4	40.5	1.3	20.6	17.4	65.1
115	115	184.4	241.3	146.1	152.4	136.5	129.4	40.5	1.3	20.6	17.4	65.1
120	120	192.4	263.5	146.1	160.4	142.9	135.7	40.5	1.3	20.6	17.4	65.1
125	125	254.0	304.8	171.7	184.4	155.6	148.4	44.4	1.3	20.6	17.4	77.3
130	130	260.4	311.2	178.1	190.8	161.9	154.8	44.4	1.3	20.6	17.4	77.3
135	135	266.7	322.3	190.5	203.2	168.3	161.1	44.4	1.3	20.8	17.4	77.3
140	140	266.7	322.3	190.5	203.2	168.3	161.1	44.4	1.3	20.8	17.4	77.3

LIMITES D'UTILISATION

d₁ = 25 ÷ 140 mm

p = 20 Kg/cm²

v = 25 m/s

t = -20 ÷ +200°C

Les limites d'utilisation ci-dessus peuvent varier en fonction du facteur PV

MATERIAUX

BQPGG

QQPGG

BUPGG

UUPGG

CONSTRUCTION

1 Grain mobile

2 Grain stationnaire

3 Joint torique

4 Ressort

5 Vis d'attache

5a Corps

5b Bride

Il existe d'autres combinaisons de matériaux

LIDERING

LIDERING, S.A.

Pg. Ferrocarrils Catalans, 106-108 · 08940 Cornellà de Llobregat BARCELONA

Service Ventes Nationales: 902 480 440

Service Ventes Internationales: +34 93 480 44 22

Fax 93 480 44 04



Pollensa, 2, Ofic. 8. Edif. Artemisa - Tartessos

28290 Las Rozas MADRID

Tel. 902 480 440 · Fax 91 361 40 20

LIDERING S.A.R.L.

Parc des Aqueducs · Chemin du Favier RD 42 · 69230 Saint-Genis-Laval FRANCE

Tél. 04 72 67 02 67 - Fax 04 78 56 04 08

S.A. LIDERING N.V.

BP 10 · 1410 Waterloo BELGIQUE-BELGIË

Tél. 00 34 93 480 44 22 - Fax 00 34 93 480 44 04

<http://www.lidering.com>

email: info@lidering.com