


technical drawing

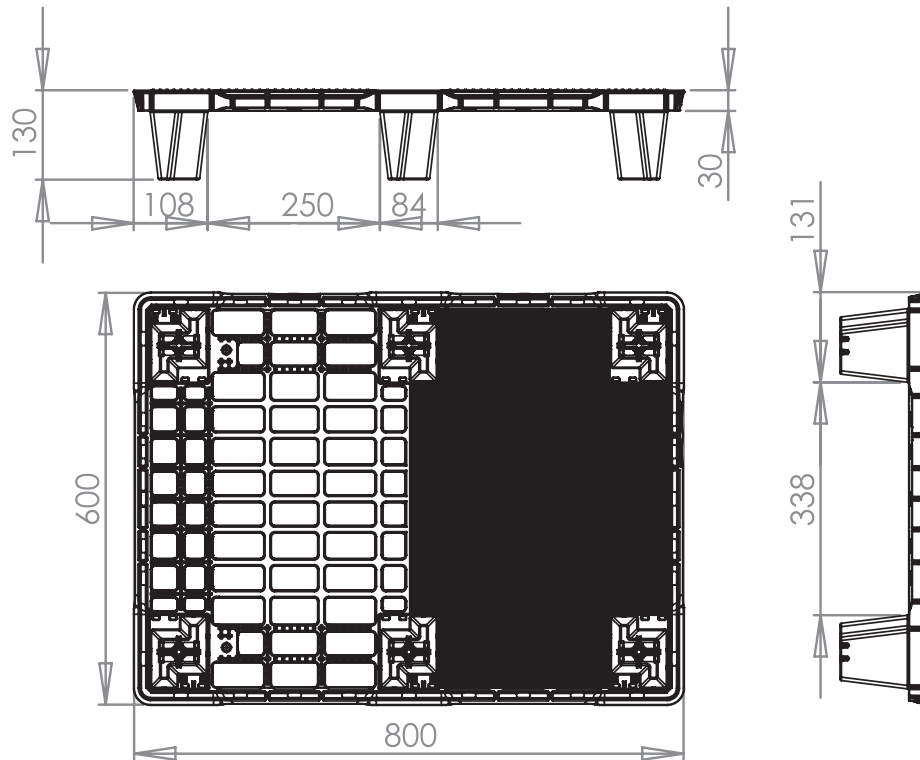

technical data sheet

Description:	Mono-block pallet: the SmartFlow pallet is moulded in one piece. The pallet is nestable and stackable.		
Dimensions:	Length 800 mm / Width 600 mm / Height 130 mm		
Option:	closed deck version (ref. SF600UL/P) or perforated deck version (ref. SF600UL/A) with or without rim / personalisation possible / sleeve can be positioned		
Weight:	3.3 kg (+/-2%) closed deck version / 2.8 kg (+/-2%) perforated deck version		
Raw materials:	HDPE recycled or virgin		
Mechanical resistance*:	Static : 700 kg / Dynamic : 350 kg / In rack : not applicable		
Hygenic:	Easy to clean thanks to the open structure.		
Environment:	The pallet is fully recyclable at the end of the lifetime.		
	Pallets per stack	Number of stacks	Total
Standard lorry:	78	66	5.148
	* The mechanical resistance is measured with a filmed load, equally divided over the pallet surface.		

SmartFlow EUROPE SA

rue du Plavitout 133 - 7700 Mouscron, Belgium
 T. +32 (0) 56 28 26 90 - F +32 (0) 56 28 26 99
 info@smart-flow.com - www.smart-flow.com

half pallet - ultra light

600x800

nestable

article ref: SF 600 UL



new



SmartFlow

plastic pallets / containers / bins&crates **EUROPE**

3