




C.U.I. RO15564229, Nr. Inreg. R.C. J10/558/2003  
 Sediul social: BERCA, str. Plesesti, jud. BUZAU  
 Capital social subscris si varsat: 400 LEI  
 Cont IBAN: RO09 BRDE 100S V041 6457 1000  
 Deschis la BRD sucursala Berca

Telefon: +4 0238 510 851  
 Fax: +4 0338 819 339  
 Mobil: +4 0746 043 026  
 E-mail: [contact@bibiscom.ro](mailto:contact@bibiscom.ro)  
 Web site: [www.bibiscom.ro](http://www.bibiscom.ro)

## Q R C® - EUROPEAN RANGE ROLLER CHAINS

CHAINS MANUFACTURED BY AN ISO 9002 CERTIFIED FACTORY

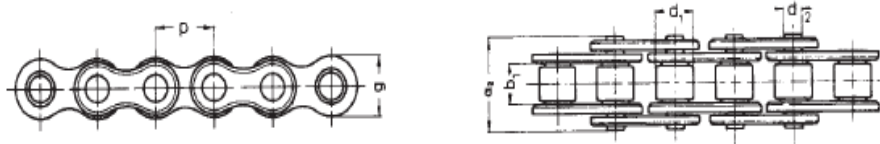

ISO N.	SINGLE - STAINLESS STEEL										
	mm	P	Inch	b <sub>1</sub> min. mm	d <sub>2</sub> mm	d <sub>1</sub> max. mm	a <sup>2</sup> max. mm	g max. mm	f cm <sup>2</sup>	kg/m =	ult. tensile strength N. min.
05B-1	8		-	3.00	2.31	5.00	8.6	7.11	0.11	0.18	3.400
06B-1	9.525		3/8"	5.72	3.28	6.35	13.5	8.26	0.28	0.41	4.400
08B-1	12.7		1/2"	7.75	4.45	8.51	17.0	11.81	0.50	0.70	9.800
10B-1	15.875		5/8"	9.65	5.08	10.16	19.6	14.73	0.67	0.95	13.600
12B-1	19.05		3/4"	11.68	5.72	12.07	22.7	16.13	0.89	1.25	15.000
16B-1	25.4		1"	17.02	8.28	15.88	36.1	21.08	2.10	2.70	39.500

ISO N.	DOUBLE - STAINLESS STEEL											
	mm	P	Inch	b <sub>1</sub> min. mm	d <sub>2</sub> mm	d <sub>1</sub> max. mm	a <sup>2</sup> max. mm	g max. mm	e mm	f cm <sup>2</sup>	kg/m =	ult. tensile strength N. min.
06B-2	9.525		3/8"	5.72	3.28	6.35	23.8	8.26	10.24	0.55	0.78	8.400
08B-2	12.7		1/2"	7.75	4.45	8.51	31.0	11.81	13.92	1.00	1.35	16.950
10B-2	15.875		5/8"	9.65	5.08	10.16	36.2	14.73	16.59	1.34	1.85	27.000
12B-2	19.05		3/4"	11.68	5.72	12.07	42.2	16.13	19.46	1.78	2.50	29.700
16B-2	25.4		1"	17.02	8.28	15.88	68.0	21.08	31.88	4.21	5.40	69.000

ISO N.	NICKEL-PLATED										
	mm	P	Inch	b <sub>1</sub> min. mm	d <sub>2</sub> mm	d <sub>1</sub> max. mm	a <sup>2</sup> max. mm	g max. mm	f cm <sup>2</sup>	kg/m =	ult. tensile strength N. min.
06B-1	9.525		3/8"	5.72	3.28	6.35	13.5	8.26	0.28	0.41	8.200
08B-1	12.7		1/2"	7.75	4.45	8.51	17.0	11.81	0.50	0.70	16.400
10B-1	15.875		5/8"	9.65	5.08	10.16	19.6	14.73	0.67	0.95	20.500
12B-1	19.05		3/4"	11.68	5.72	12.07	22.7	16.13	0.89	1.25	26.500
16B-1	25.4		1"	17.02	8.28	15.88	36.1	21.08	2.10	2.70	52.500

