


ESKE/1-L-i 32

Ex-cable gland, polyamide with long thread



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

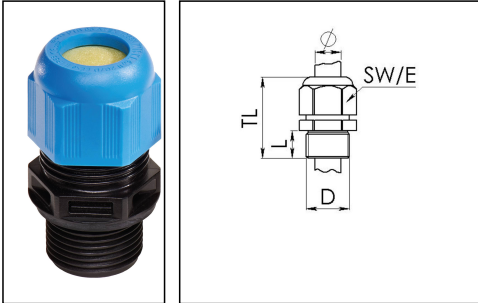

Material cable gland	Polyamide
Material sealing gasket	EPDM
Temp. range min	-40 °C
Temp. range max	75 °C
Protection class	IP 66 / IP 68, 5 bar 30 min
Marking	II 2 G Ex e IIC Gb, II 2 D Ex tb IIIC Db IP68
Approval	PTB 13 ATEX 1015 X, IECEx PTB 13.0034X
Glow wire test	750 °C
Colour	RAL 5012/9005
Thread type	M
Connection thread size D	32
Lead	1,5
Length screw-in thread L	15 mm
Cable diameter min	13 mm
Cable diameter max	21 mm
Key width SW	36 mm
Collar diameter (E)	41 mm
Total length TL	45 mm - 53 mm
Install. torques fitting	4,5 N m
Install. torques cap nut	3 N m
Type of cable anchorage	A
Impact category	7
Product Color	RAL 9005
Order no. RAL 9005	10103391
Type	ESKE/1-L-i 32

Packing unit

25

ETIM-Classification

EC000441

Recommended accessories

EMUG 32	10061784
RDE 32	10062186
BS 14	10064011
BS 21	10064014

24.07.2015

