


ESKE/1-L-i 50

Ex-cable gland, polyamide with long thread



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

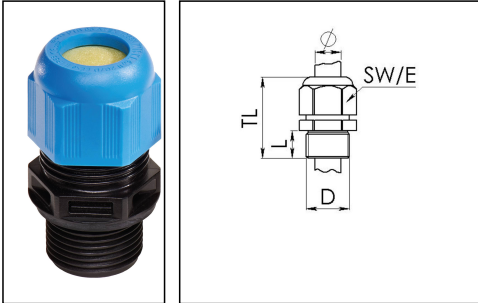

Material cable gland	Polyamide
Material sealing gasket	EPDM
Temp. range min	-40 °C
Temp. range max	75 °C
Protection class	IP 66 / IP 68, 5 bar 30 min
Marking	II 2 G Ex e IIC Gb, II 2 D Ex tb IIIC Db IP68
Approval	PTB 13 ATEX 1015 X, IECEx PTB 13.0034X
Glow wire test	750 °C
Colour	RAL 5012/9005
Thread type	M
Connection thread size D	50
Lead	1,5
Length screw-in thread L	18 mm
Cable diameter min	23 mm
Cable diameter max	35 mm
Key width SW	55 mm
Collar diameter (E)	61 mm
Total length TL	63 mm - 76 mm
Install. torques fitting	13 N m
Install. torques cap nut	12 N m
Type of cable anchorage	A
Impact category	7
Product Color	RAL 9005
Order no. RAL 9005	10103393
Type	ESKE/1-L-i 50

Packing unit

4

ETIM-Classification

EC000441

Recommended accessories

EMUG 50	10061786
RDE 50	10062188
BS 25	10064015
BS 35	10064017

27.07.2015

