SOLOlight

Innovation Series

Baby Beam 200 Platinum

- **Lamp:** Philips Platinum 5R, CT:8000 K, Life: 2,000H
- **Control channel:** 11/13/16 channels
- **Pan movement:** 540°/630° optional (16 bit)
- **Tilt movement:** 265° (16 bit)
- **Advanced moving system:** fast, stable and quiet, auto X-Y repositioning
- **Color wheel:** 12 dichroic filters +open, rainbow effect
- **Rotating gobo:** 8 interchangeable, rotating, indexable, gobos+open
- **Rotating prism:** 3 facets and prism micros
- **Shutter:** Variable from 1-15 flashes or random strobe
- **Dimmer:** 0~100% full range dimming
- **Frost:** 0~100%
- **Beam angle:** 2.5°
- **8 pre-built programs can be selected**
- **Friendly blue and white LCD display:** by activating the rechargeable battery in display, no need external power supply can enter menu for address setting or access other function settings; The display will be locked automatically after 15 seconds from the last button to prevent incorrect operation, long press menu button for 3 seconds to activate keys again
- **Humanized reset detection set:** long press menu and enter button to lock pan/tilt reset, can support fixtures do the reset detection in flight case
- **Energy saving mode:** black out can reduce 50 % power consumption; User can set in menu that within 1-99 minutes if receiving no signal, the fixture will enter hibernation status, which greatly reduce the heat and prolong the life of key components such as motors
- **Software upgrade:** through DMX cable conveniently, quickly upgrade software
- **Remote DMX addressing, lamp of/off, reset, sound control switch by controller**
- **Display the fixture and lamp running time so customers can get to know the situation about lamp usage**
- **Input signal isolating protection function, guarantee the stability of signal transmission and without interference**
- **Fan automatically control function:** According to the airframe temperature the fan will automatically adjust its speed, in order to achieve reasonable cooling and reduce the noise

Flicker free QUALIFIED FOR FILM & TV

RDMX REMOTE DMX ADDRESSING

Power: AC100-240V, 50/60HZ
Packing dimension: 36 x 34 x 47 cm
Net Weight: 12kg

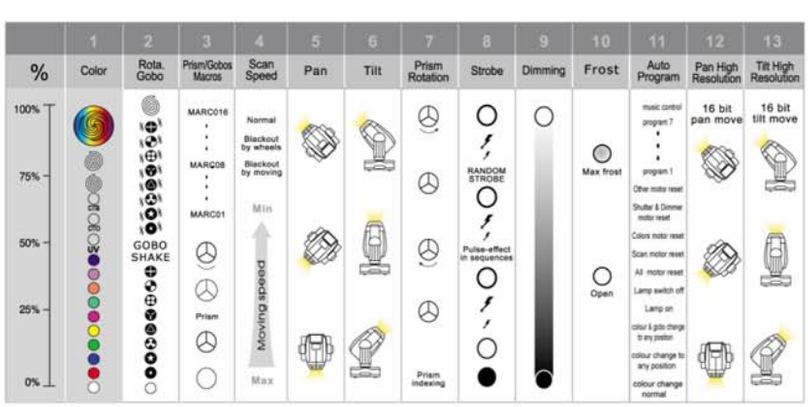

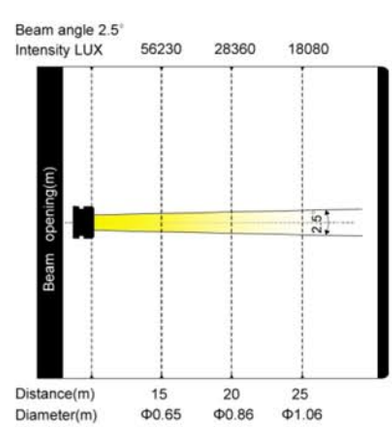

www.sololight.ro office@sololight.ro Tel-021-3100880