


## Feature

- » All steel construction for external impact resistance.
- » Light hand-pull device, easy for lifting.
- » Chain guides provide smooth chain operation.
- » 360° degree handle rotation with short stroke to ratchet loads.
- » Durable baked enamel paint protection.
- » Reliable non-asbestos disc brake.
- » Each lever hoist is operationally tested to 150% of the rated capacity & issued with an individual test certificate.

**Option** » Galvanized lift chain is available.

» Load limiter is available.

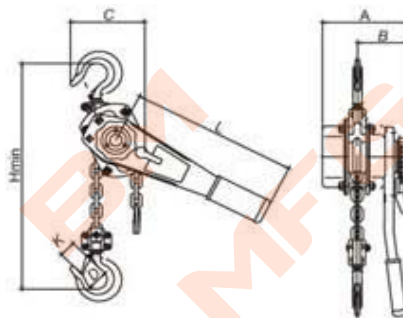

### Model: **HSH-A**

Capacity (ton)	0.25	0.5	0.75	1	1.5	2	3	6	9
Lifting height (m)	1	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
Test load (KN)	3.75	7.5	11	15	22.5	30	37.5	75	112.5
Effort on lever to lift full load (N)	250	340	140	140	220	240	320	340	360
Falls of load chain	1	1	1	1	1	1	1	2	3
Diameter of load chain (mm)	4	5	6	6	7.1	8	10	10	10
Headroom Hmin (mm)	230	260	320	320	380	380	480	600	700
Diameter of hook K (mm)	25	25	27	27	34	36	38	48	57
Length of lever handle L(mm)	160	300	280	280	410	410	410	410	410
Net weight (kg)	1.8	4	7	7	10	12	18	29	45
Extra weight per meter of extra lift (kg)	0.41	0.5	0.8	0.8	1.1	1.4	2.2	4.4	6.6

### Model: **HSH-V**

Capacity (ton)	0.75	1	1.5	2	3	6	9
Lifting height (m)	1.5	1.5	1.5	1.5	1.5	1.5	1.5
Test load (KN)	11	15	22.5	30	37.5	75	112.5
Effort on lever to lift full load (N)	145	150	200	220	280	310	320
Falls of load chain	1	1	1	1	1	2	3
Diameter of load chain (mm)	6	6	7.1	8	10	10	10
Headroom Hmin (mm)	300	300	365	365	440	575	700
Diameter of hook K (mm)	24	24	31	31	34	43	55
Length of lever handle L(mm)	255	255	365	365	365	365	365
Net weight (kg)	7	7	10	12	18	28.5	45
Extra weight per meter of extra lift (kg)	0.8	0.8	1.1	1.4	2.2	4.4	6.6

### Model: **HSH-AII** (chromed body & handle)

Capacity (ton)	0.25	0.5	0.75	1.5	3	5	9
Lifting height (m)	1	1.5	1.5	1.5	1.5	1.5	1.5
Test load (KN)	3.15	6.3	11	22.5	37.5	74	112.5
Effort on lever to lift full load (N)	382	315	254	296	380	390	420
Falls of load chain	1	1	1	1	1	2	3
Diameter of load chain (mm)	4	5	6	7.1	10	10	10
Headroom Hmin (mm)	245	310	320	385	460	600	860
Diameter of hook K (mm)	20	25	29	33.5	40	42.5	53
Length of lever handle L(mm)	168	308	308	408	418	418	418
Net weight (kg)	2.3	5	7.4	11.4	20.8	28.1	48.9
Extra weight per meter of extra lift (kg)	0.41	0.5	0.8	1.1	2.2	4.4	6.6