


Mechanical Jack | Rack Jack



Feature

- » Top quality steel structure makes high safety and durability.
- » All Jacks are tested with 25% overload.
- » Equipped with fixed claw.
- » Collapsible handle for easy storage, operation and maintenance.
- » Sensitive brake system, safe and reliable.
- » Fast lift speed makes it work more efficiently.
- » Comply with EU Machinery Directive 2006/42/EC & EN standards.
- » According to DIN 7355 standard.

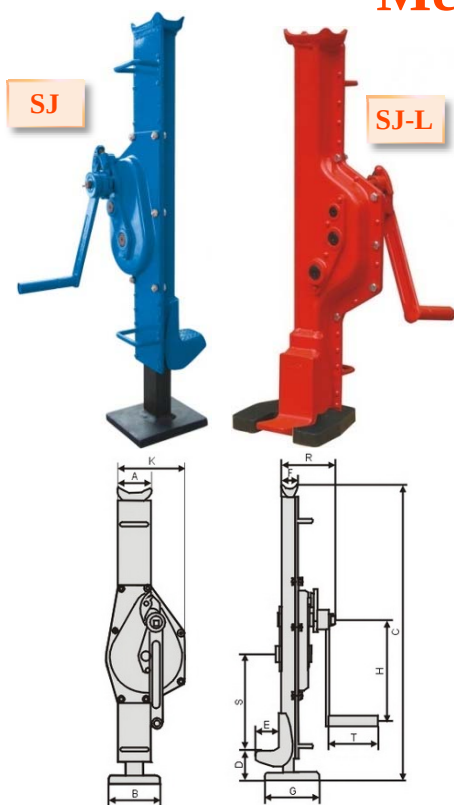

Model		SJ-1.5	SJ-3 (SJ-3L)	SJ-5 (SJ-5L)	SJ-10 (SJ-10L)	SJ-16	SJ-20	SJ-25
Rated capacity (t)		1.5	3	5	10	16	20	25
Test load (kN)		18.4	36.8	61.3	122.5	196	245	306
Handle pull to lift full load (N)		190	196	235	431	580	650	750
The numbers of operator		1	1	1	2	2	2	2
Dimensions (mm)	A	77	83	105	120	153	153	153
	B	100	130 (155)	140 (190)	140 (210)	150	150	198
	C	605-905	720-1075	735-1065	795-1155	790-1105	840-1155	850-1360
	D	55-355	55-410 (20-375)	60-390 (30-360)	70-430 (30-390)	90-405	90-405	110-520
	E	55	60 (50)	70 (60)	80 (75)	85	85	85
	F	40	45	68	73	90	90	90
	G	110	138 (130)	175 (170)	175 (170)	182	182	230
	H	225	285	285	330	360	360	360
	K	121	200	190	252	275	275	388
	R	119	140	155	185	210	224	200
	S	185	230 (270)	220 (280)	220 (280)	202	202	205
	T	126	126	126	250	250	250	250
Net Weight (kg)		10.7	21.3 (24.5)	27 (30)	47 (53)	64.5	72	93

* **SJ**: standard type. **SJ-L**: low-profile type. *



Model		SJ-A			SJ-W		
Rated capacity (t)		3	5	10	3	5	10
Test load (kN)		44.1	73.5	147	36.8	61.3	122.5
Handle pull to lift full load (N)		350	400	580	280	280	530
Dimensions (mm)	A	83	108	102			
	B	130	140	140			
	E	60	71	86			
	F	45	68	76			
	G	138	170	170			
	H	249	275	300			
	K	170	190	252			
	R	140	155	185			
	T	128	128	250			
Net Weight (kg)		23.4	35.6	61	24	33	51

