

II.2. **DELTA BLUE®** Handketting Takel

DELTA BLUE® is een professionele kettingtakel voor de veeleisende vakman.

- Uitgevoerd met overlastbeveiliging.
- Fijn geslepen assen, nestenwiel met fijn geslepen passingen.
- Remsysteem met stalen beveiligingsplaat.
- Lagere in het nestenwiel voor geleiding van de last-as.
- Voor lastketting tot Grade 100.
- Asbestvrije remschrijven.
- Ratelschrijf met dubbel ratelpallen.
- Hijst soepel, ook bij de maximum toegelaten belasting.
- Goed toegankelijk voor de zelden voorkomende reparaties.


Overload Protection



DELTA BLUE® Manual Chain Hoist

DELTA BLUE® is developed for very demanding experts.

- Unit with overload limited kit.
- Precision machined and highly finished shafts, sprocket and bearing housings.
- Brake system with steel protected shield.
- Roller bearing inside the chain sprocket supporting the load shaft.
- Asbestos-free brake lining.
- Ratchet disc with double ratchet pawls.
- All steel structure and gearing specially designed to fit up to grade 100 load chain.
- A smoothly running hoisting device, even at the maximum permitted load.
- Well accessible for seldom-or-never repairing.

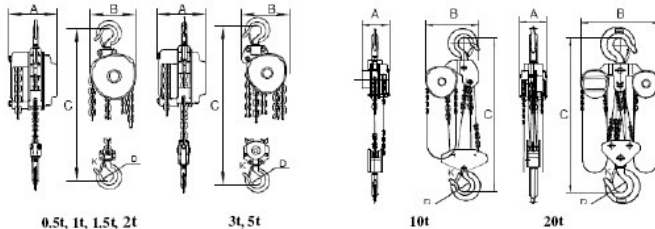

Capacity (tons)	0,5	1	1,5	2	3	5	10	20
Standard lift (m)	2,5	2,5	2,5	3	3	3	3	3
Running test load (kn)	7,5	15	22,5	30	45	62,5	125	250
Effort required to lift max. Load (N)	221	304	343	410	343	414	414	828
No. of Columns of load chain	1	1	1	1	2	2	4	8
Load chain diameter (mm)	6	6	8	8	8	10	10	10
Dimensions (mm)	A	113	126	141	141	141	163	191
	B	125	147	183	183	183	215	595
	C	255	306	368	368	486	616	1000
	D	36	40	45	50	58	64	110
	K	30	34	38	41	48	52	64
Net weight(kg)	8,5	11	18	18	27	42	83	193
Packing measurement (cm)	25,5x18,5x13,7	25,5x20,5x14,7	33x25,5x16,2	33x25,5x16,2	36x27x16,2	43x34x19,2	50x41x21	64x38x64
Extra weight per meter extra lift (kg)	1,7	1,7	2,3	2,3	3,7	5,6	9,7	19,4