



I.4. **DELTA SPARKLESS®** Lever Hoist



Overload
Protection

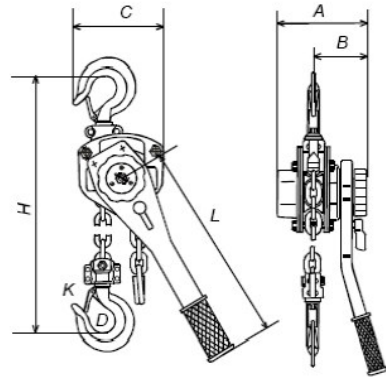

0,75t, 1,25t, 2t

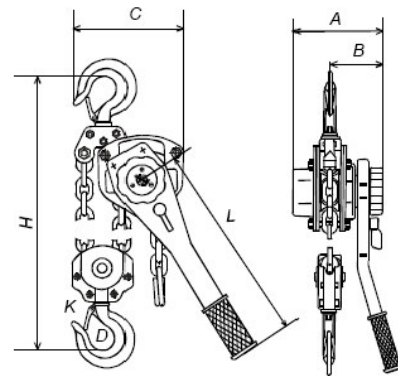

4t, 6t

Capacity	(tons)	0,75	1,25	2	4	6
Standard lift	(m)	1,5	1,5	1,5	1,5	1,5
Running test load	(kn)	11.0	15	24	48	72
Effort required to lift max. Load	(N)	140	240	320	340	360
No. of Columns of load chain		1	1	1	2	3
Load chain diameter	(mm)	6	8	10	10	10
Dimensions (mm)	A	155	180	215	215	215
	B	95	105	130	130	130
	C	135	155	200	200	330
	D	37	45	50	64	85
	H	320	380	480	600	700
	L	285	370	410	410	410
	K	30	36	40	50	58
Net weight	(kg)	7.7	11.8	21	32	47
Packing measurement	(cm)	38x14x16,5	46,5x15,5x19	51x19x21,5	53x22x21,5	82x32x21,5
Extra weight per meter extra lift	(kg)	0.8	1.4	2.2	4.4	6.6