


HIGH-WALL AIR CARE

R410 Inverter Bio/HEPA Split Air Conditioners

9,000 - 18,000 BTU Capacity Models • R410 Refrigerant • 3 Types of Filters

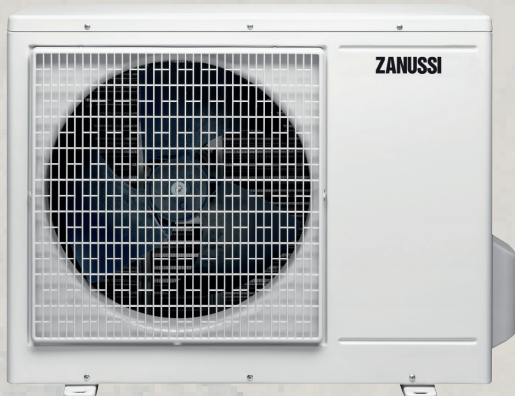

- Bio/HEPA filter
- Removable active carbon filter
- 2 Nylon filters
- Deluxe LCD wireless remote control
- Electronic display on evaporator
- 24-Hour on/off timer
- 3 Fan settings
- Sleep economy mode
- Automatic re-start
- Dehumidification
- Automatic swing louvers
- Safety lock for temperature controls
- Air ionizer
- Galvanized steel condenser cabinet
- Cool-only and cool/heat pump models
- Automatic frost protection
- Easy installation

la vita è bella

ZANUSSI

ITALIAN SINCE 1916

HIGH-WALL AIR CARE

GENERIC DENOMINATION	7K Heat Pump	9K Heat Pump	12K Heat Pump	18K Heat Pump	24K Heat Pump
	ZXS 07 HR1W	ZXS 09 HR1W	ZXS 12 HR1W	ZXS 18 HR1W	ZXS 24 HR1W

INTERNAL UNIT	ZXS 07 HR1WI	ZXS 09 HR1WI	ZXS 12 HR1WI	ZXS 18 HR1WI	ZXS 24 HR1WI
EXTERNAL UNIT	ZXS 07 HR1WE	ZXS 09 HR1WE	ZXS 12 HR1WE	ZXS 18 HR1WE	ZXS 24 HR1WE

Performances

Cooling	Capacity (Btu/h)	7000	9000	11000	17000	24000
	EER (W/W)	3.2	3.2	3.2	2.8	2.81
	Energy Class	A	A	A	C	C
Heating	Capacity (Btu/h)	7500	9500	12500	18000	27000
	EER (W/W)	3.6	3.6	3.6	3.0	3.21
	Energy Class	A	A	A	D	C
Dehumidification (liter/hour)	0.8	1.0	1.1	1.8	2.6	
Ecological Gas	R410a	R410a	R410a	R410a	R410a	
Inverter Technology	-	-	-	-	-	

Main Features

Indoor	Air flow (High/Mid/Low)	350/300/260	380/330/280	550/500/400	750	1150/1080/1020
	Noise level (High/Mid/Low)	36/33/31	39/36/32	43/41/35	48/45/38	47/44/41
Outdoor	Air flow (High/Mid/Low)	1430	1740	2000	2400	2500
	Noise level (High/Mid/Low)	52/49/46	53/50/57	54/51/48	61	60

Air Filtration System

Easy to clean Nylon Filter	☆	☆	☆	☆	☆
Active Carbon Filter	☆	☆	☆	☆	☆

Other Key features

Vertical Swing (Air Swing Direction)	Manual	Manual	Manual	Manual	Manual
Horizontal Swing (Air Swing Direction)	☆	☆	☆	☆	☆
Air Direction Control	☆	☆	☆	☆	☆
Sleep / Economy Mode	☆	☆	☆	☆	☆
Auto-Restart Function	☆	☆	☆	☆	☆
Self Diagnosis and Self Protection	☆	☆	☆	☆	☆
Turbo Mode	☆	☆	☆	☆	☆
Washable front panel	☆	☆	☆	☆	☆
Anti Cold Function	☆	☆	☆	☆	☆
Blue Shield fin	☆	☆	☆	☆	☆
Anti -Rust Cabinet	☆	☆	☆	☆	☆
Trapeziform Innergroove Copper	☆	☆	☆	☆	☆

Dimensions (WxDxH)

Indoor - Net Dimension	790x190x275	790x190x275	790x190x275	940x198x275	1030x221x313
Indoor - Packing Dimension	865x265x350	865x265x350	865x265x350	1015x265x350	1135x435x315
Indoor - Net/gross weight	8.5/10.5	8.5/10.5	9/11	10/13	13.5/20
Outdoor - Net Dimension	685x260x430	700x235x535	700x235x535	760x590x285	845x335x695
Outdoor - Packing Dimension	795x345x495	815x325x580	815x325x580	887x355x655	965x395x755
Outdoor - Net/gross weight	25.5/29.5	26/28	28.5/32.5	39/42	58.5/62.5
Stuffing Qty 40 ft HQ	127/279/325	123/262/304	123/262/304	69/140/168	65/140/150

Approvals

CE / RoHS	CE / RoHS	CE / RoHS	CE / RoHS	CE / RoHS
-----------	-----------	-----------	-----------	-----------